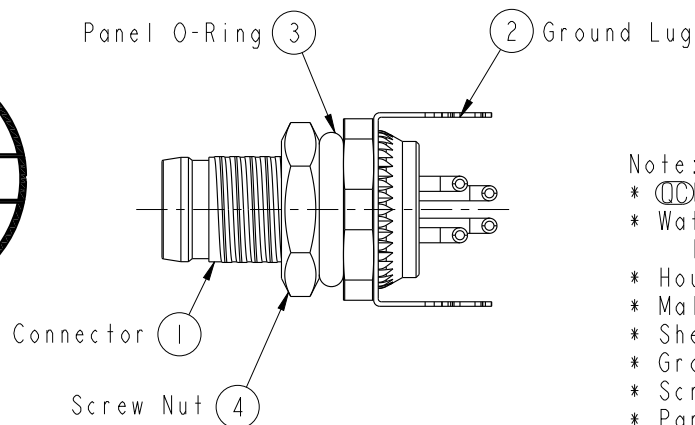



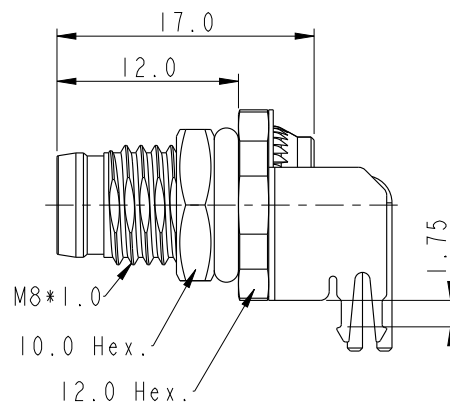







Recommended
Panel Cut-Out

Note:

- *  Important Dimension.
- * Waterproof Rate: IP68.
IP68: 1M Depth of Water in 24hours.
- * Housing: Nylon+GF, Black.
- * Male Pin: Copper Alloy, Gold Plated.
- * Shell: Metal, Nickel Plated.
- * Ground Lug: Copper Alloy, Nickel Plated.
- * Screw Nut: Copper Alloy, Nickel Plated.
- * Panel O-Ring: Viton, Green.
- * Rated Voltage: 3Pin 60V dc. or ac.
4Pin 30V dc. or ac.
- * Rated Current: 3 & 4Pin 4A
- * Operating Temperature: -40~105°C
- * For Panel Thickness: Min=2.0mm, Max=4.0mm.
- * For PCB Thickness: Max=1.6mm.
- * Recommended Nut Torque: 4~6 Kgf.cm.

UNIT: mm				TITLE M8 Male Conn. Panel 90° PCB Type (Shielded) SCALE 2:1 SIZE A4 SHEET 1 OF 2 REV. A WC-REV. A.6 QC: Inspection item Amphenol LTW 安費諾亮泰企業股份有限公司				ITEM NO		DRAWN BY Yulong_wang		DATE 2016-01-20					
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°								DWG NO M8S-XXPMR-SF8001		CHECKED BY Cary		DATE 2016-01-20					
								CUSTOMER ALTW		APPROVED BY Jerry		DATE 2016-01-20					
								2		3		4		5		6	
FMW10702-01-02A																	

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

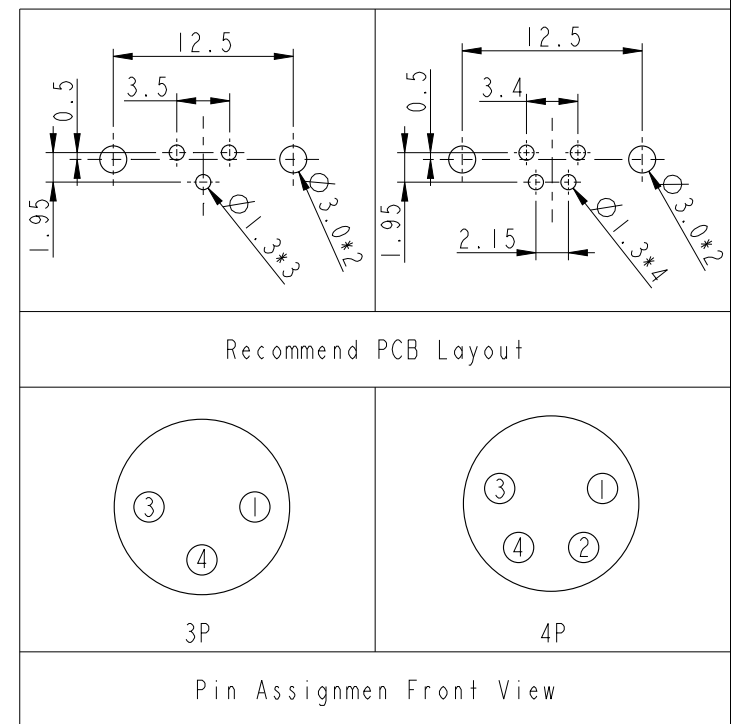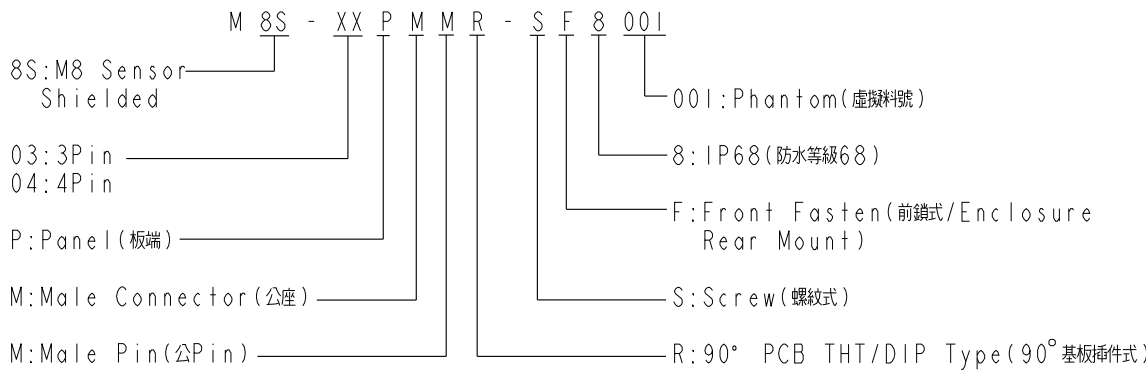

UNIT:mm				TITLE M8 Male Conn. Panel 90° PCB Type (Shielded)		ITEM NO		DRAWN BY Yulong_wang		DATE 2016-01-20	
TOLERANCE		SCALE 2:1		SIZE A4		DWG NO M8S-XXPMMR-SF8001		CHECKED BY Cary		DATE 2016-01-20	
.X ±0.25		REV. A		WC-REV. A.6		CUSTOMER ALTW		APPROVED BY Jerry		DATE 2016-01-20	
.XX ±0.1		SHEET 2		OF 2							
.XXX ±0.05		QC:Inspection item									
ANGLES ±1°											

Amphenol LTW
安費諾亮泰企業股份有限公司