


PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS in.				
		A ±.03	W ±.01	C ±.02	M ±.03	H ±.01
PV10-6LFB-2K	#6	1.02 (25.91)	.30 (7.62)	.21 (5.33)	.77 (19.56)	.14 (3.56)
PV10-8LFB-2K	#8	1.04 (26.42)	.30 (7.62)	.21 (5.33)	.77 (19.56)	.16 (4.06)
PV10-10LFB-2K	#10	1.04 (26.42)	.34 (8.64)	.21 (5.33)	.77 (19.56)	.19 (4.83)
PV10-14LFB-2K	1/4"	1.16 (29.46)	.46 (11.68)	.32 (8.13)	.88 (22.35)	.25 (6.35)




1. UL LISTED AND CSA CERTIFIED FOR :
 - A. 600 V MAX. VOLTAGE RATING
 - B. 221°F (105°C) MAX. TEMP. RATING
 - C. #12-10 AWG (2.5-6.0 mm²) SOLID OR STRANDED, COPPER WIRE
2. PACKAGE QTY. : 2K : 2000 PCS.
CONTINUOUS MOLDED CARRIER STRIP
3. MATERIAL :
 - A. STAMPING - .04" THK COPPER, TIN PLATED
 - B. HOUSING - YELLOW VINYL
4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
5. INSTALLATION TOOLS :
 - A. PRESSES - CP-851, CP-860, CP-861
 - B. APPLICATOR - CA-800
 - C. DIE INSERTS - CD-800-3
6. WIRE STRIP LENGTH: 11/32 ± 1/32" (8.7 ± 0.8 mm)

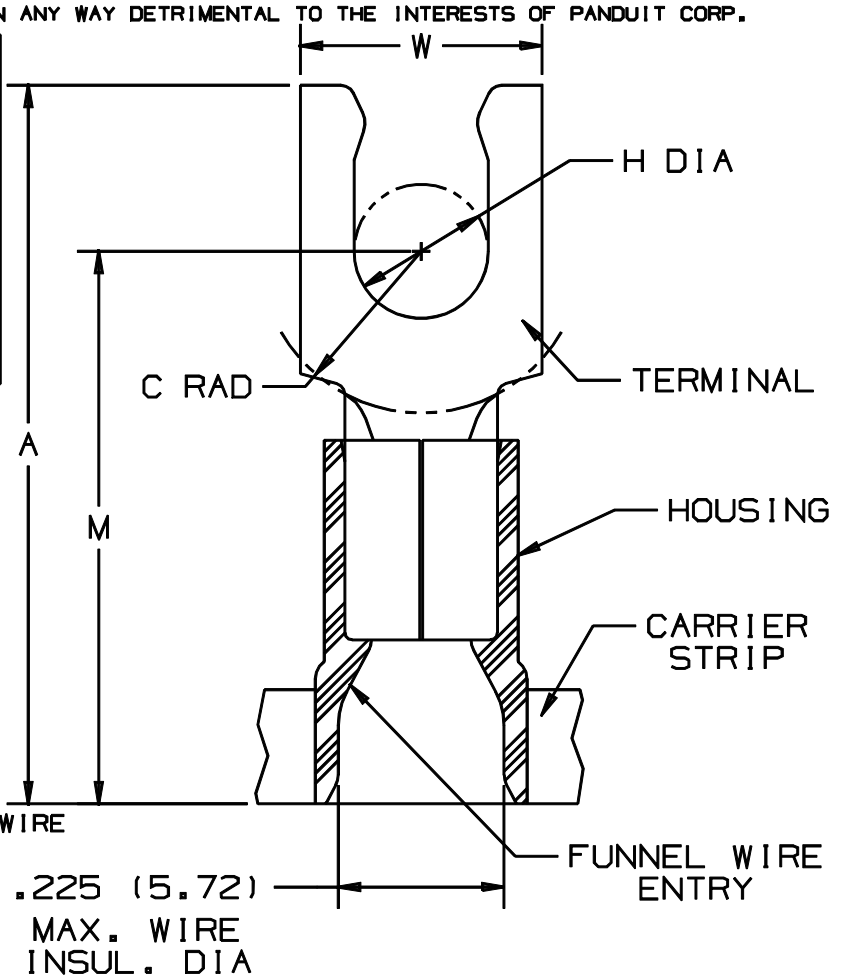

LISTED
587H
E52164



CERTIFIED
LR31212

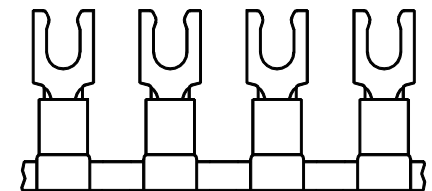

3	12/00	ED		FILESPEC WAS: N41070CC_PCD_02	08925		
2	5-95	MS		UPDATED NOTES AND DIMENSIONS	03246		
1	3-88	DSM		REDRAWN ON CAD			
REV	DATE	BY	CHK	DESCRIPTION	ECN #	PM	CUST

PANDUIT

TINLEY PARK, ILLINOIS

TERMO 2PC. CONTINUOUSLY MOLDED VINYL
INSULATED, #12-10 BARREL, LOCKING FORKS

DRAWN BY DSM	CHK'D	SCALE NONE	DRAWING NO. A41070
-----------------	-------	---------------	-----------------------