





REV.			DATE		DESCRIPTION			
A			01/07/01		ADD CRIMP NOTES/ MODIFY CONTACT PIN, FERRULE			

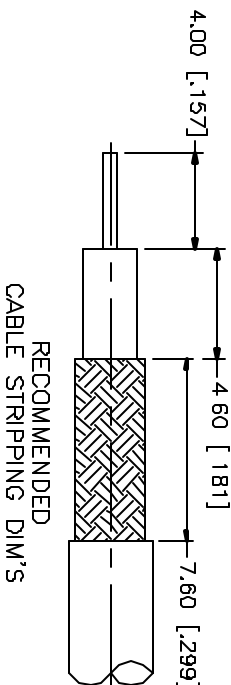

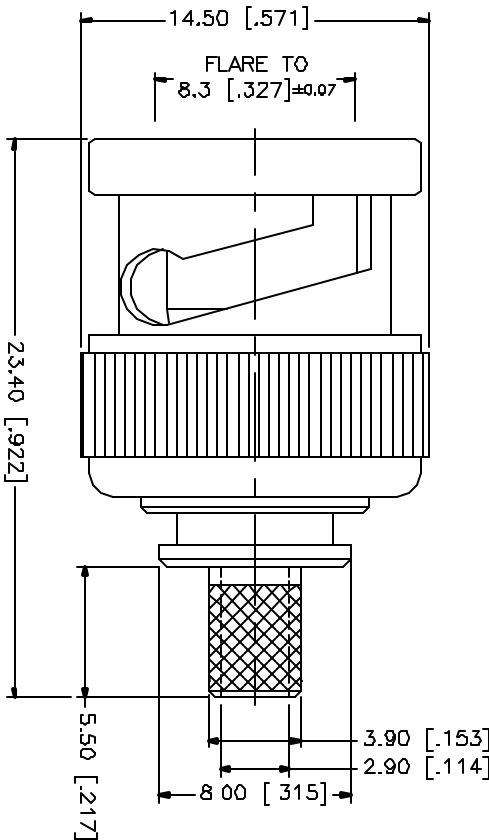

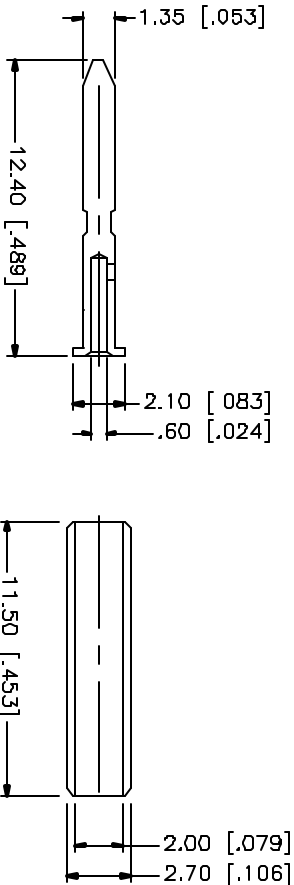

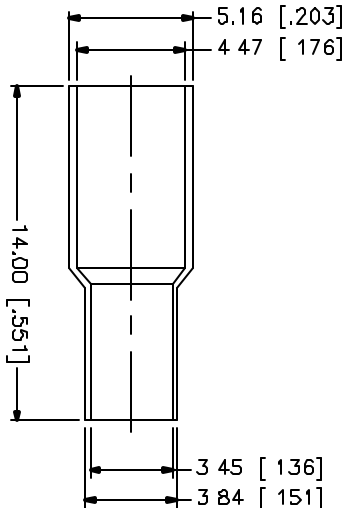

CRIMP NOTES.

1. CRIMPED FERRULE
HEX CRIMP SIZE .178"

2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .043"

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN () ARE IN INCHES FOR CUSTOMER REFERENCE ONLY	APPROVALS	DATE	TITLE BNC CRIMP PLUG (FOR LIBERTY RGB6C/22-2P CABLE)				
1 SHELL	BRASS	NICKEL	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4	DRAWN	G.R.S.	01/07/01	Connex Connector Corporation			
2 BODY	BRASS	NICKEL		CHECKED						
3 INSULATOR	TEFLON	NATURAL		ISSUED						
4 CONTACT PIN	BRASS	GOLD								
5 SLEEVE	TEFLON	NATURAL	30-120 = ± 0.6				SCALE NA			
6 FERRULE	BRASS	NICKEL	120-315 = ± 1							
7			315-1000 = ± 1.6							
8			1000-2000 = ± 2.4							
DO NOT SCALE DRAWING							PART NO. 112491-11			
							SHEET 1 OF 1			

SIZE

A

FSGM NO.

99001

DWG. NO.

112491-11.DWG

REV.

A