

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20



© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.



REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	01JUN2015	DW	CW

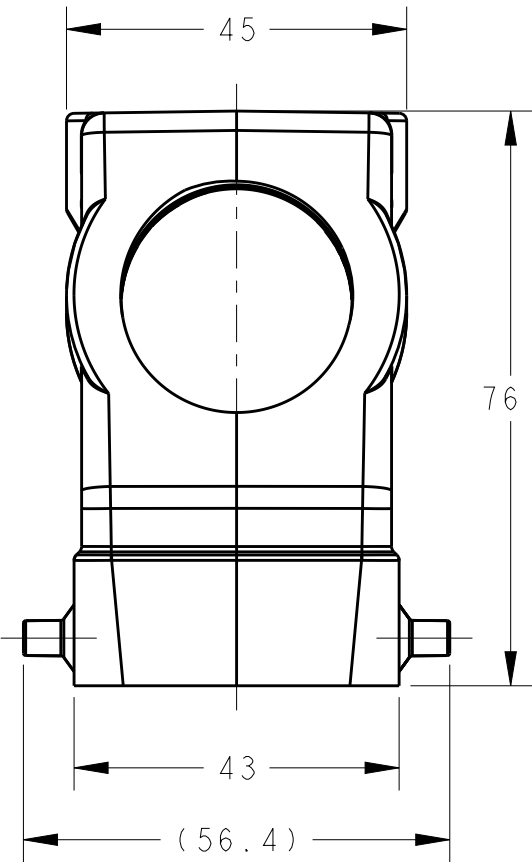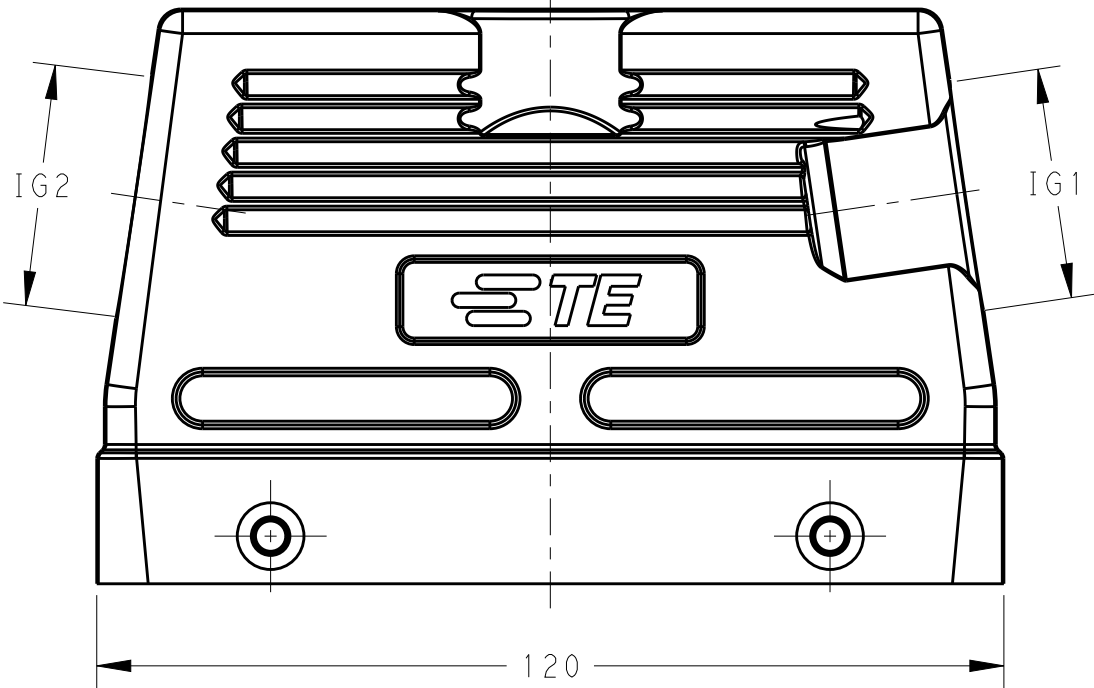


NOTES:
1. TECHNICAL CHARACTERISTICS:
HOOD MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE: POWDER COATED, GREY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
上壳材料: 铝合金
表面处理: 粉末涂层, 灰色
工作温度: -40-+125°C
防护等级: IP65(配合)

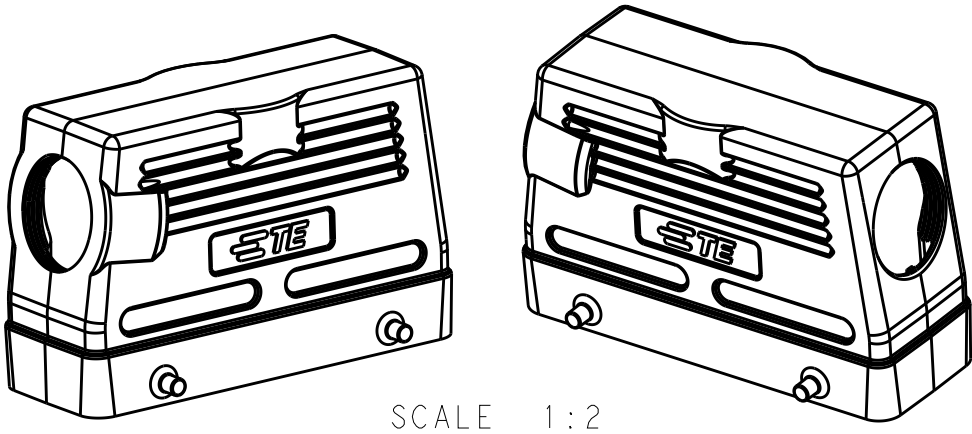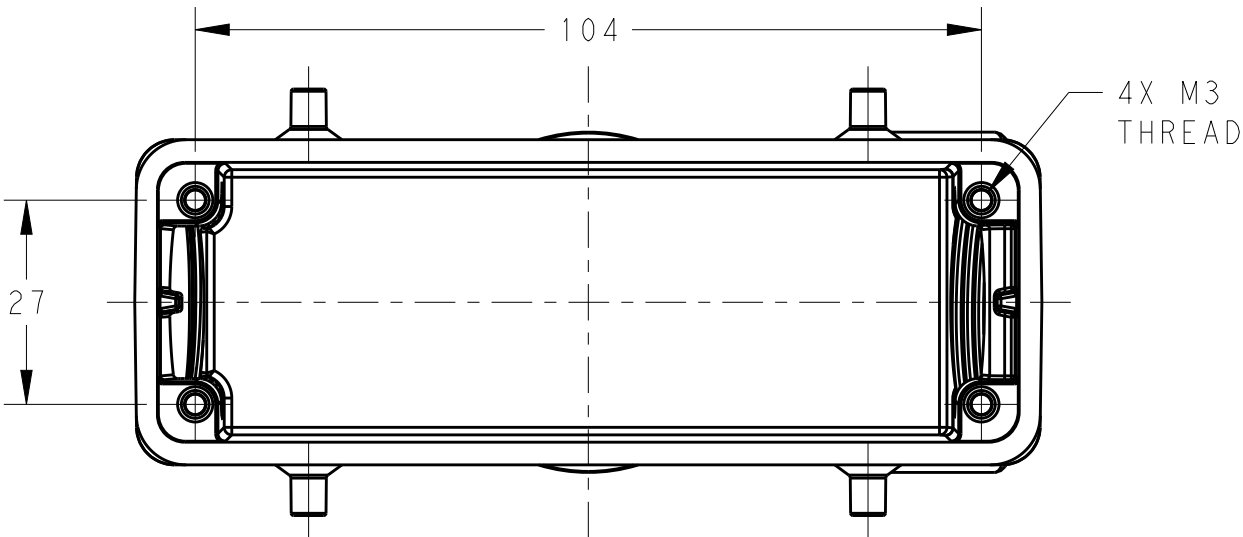

T1230240221-000	H24B-TSH-2PG21	HIGH CONSTRUCTION	PG21	PG21
T1230240232-000	H24B-TSH-2M32		M32	M32
T1230243216-000	H24B-TSH-M32/M16		M32	M16
PART NUMBER	DESCRIPTION	TYPE	IG1	IG2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN David Wang 01JUN2015	 TE Connectivity		
		CHK Chris Wang 01JUN2015			
DIMENSIONS: mm		APVD Xiang Xu 01JUN2015	NAME H24B-TSH-2M/PG		
		PRODUCT SPEC 108-137013			
		APPLICATION SPEC 114-137013			
		WEIGHT -	SIZE A3	CAGE CODE 00779	DRAWING NO C-T12302402XX000
MATERIAL -		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-		SCALE 1:1	
FINISH -		Customer Drawing		SHEET 1 OF 1	
				REV A	