


Dimensions: mm (in.)

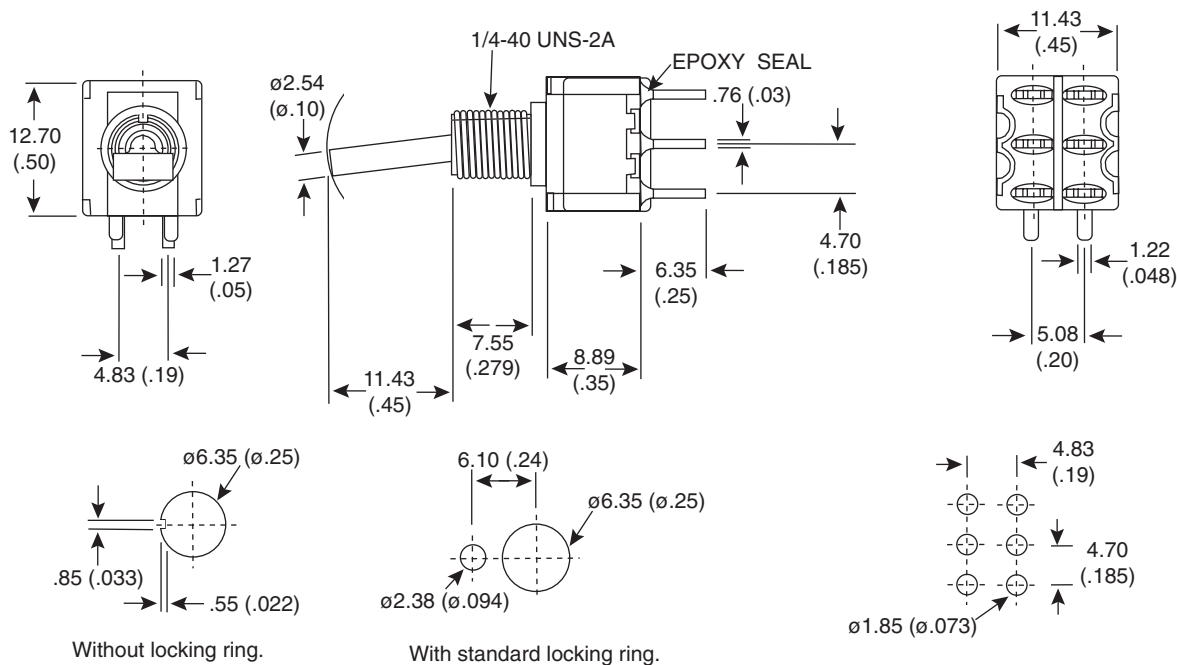

POS.1	POS.2
ON	(ON)
2-3,5-6	2-1,5-4

SWITCH FUNCTION

Electrical Specifications:

- Contact Resistance: 10mΩ max. initial @ 2-4VDC 100mA
- Insulation Resistance: 1,000MΩ min.
- Dielectric Strength: 1,000 V RMS @ sea level
- Rating: 2A / 250VAC; 5 / 120VA or 28VDC

Mechanical Specifications:

- Operating Temperature: -30° C to +85° C

Note:

- RoHS compliant by exemption

Materials:

- Case: Diallyl phthalate (DAP)
- Actuator: Brass, chrome plated
- Bushing: Brass, nickel plated
- Housing: Stainless Steel
- Terminal / Contact: Silver plated
- Switch Support: Brass, tin plated

Toggle Switch
108-1MD2T6B1M2QE-EVX

Mountain
Switch