


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AJ	16	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B	REVISED PER ECO-05-007687	02SEP05	BM	KW

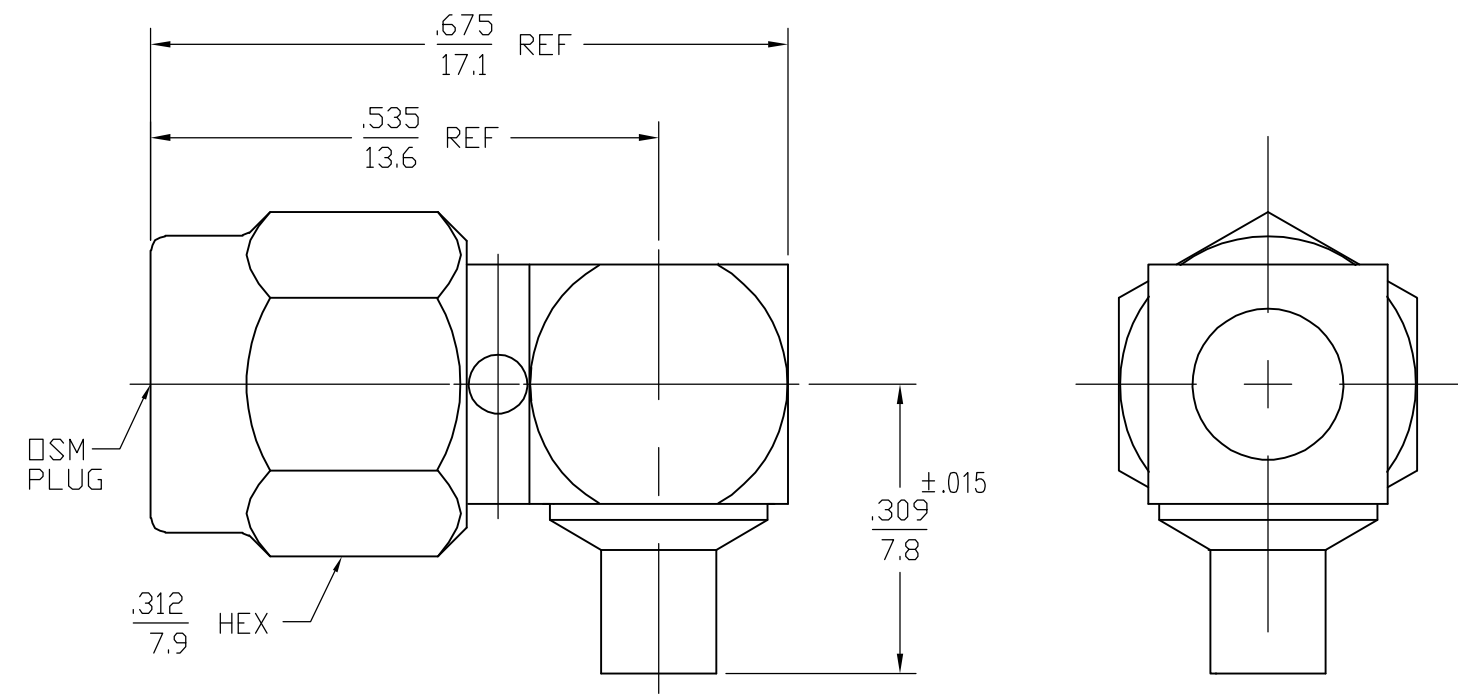

- DESIGNED FOR USE WITH .085 SEMI-RIGID CABLE. CABLE ENTRY DIAMETER: HOUSING .088 MIN CONTACT .037 MIN
- USE INSTRUCTION SHEET 408-4944.

COUPLING NUT	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER ASTM-A380
HOUSING CAP	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	GOLD PLATE PER MIL-G-45204
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
RETAINING RING	BERYLLIUM COPPER PER ASTM B 194, ALLOY C17200, CONDITION H	N/A
GASKET	SILICONE RUBBER PER ZZ-R-765	N/A

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) <u>50</u>	Interface Dimensions MIL-STD-348A, Fig. 310.1	TEMPERATURE RATING <u>-65°C TO +165°C</u>
Frequency Range (GHz) DC to <u>18</u>	Recommended Mating Torque <u>7-10 in-lbs</u>	Vibration MIL-STD-202, Method 204, Condition D.
Volt Rating (VRMS MAX) @ Sea Level <u>335</u>	Mating Characteristics:	Shock MIL-STD-202, Method 213, Condition I.
VSWR <u>1.18 ±.015F</u> (GHz)	Insertion (MAX Lbs) <u>N/A</u>	Thermal Shock MIL-STD-202, Method 107, Condition B, EXCEPT HIGH TEMP +115°C
Insertion Loss (dB MAX) <u>.05 √F(GHz)</u>	Withdrawal (MIN Oz) <u>N/A</u>	Moisture Resistance MIL-STD-202, Method 106
RF Leakage (dB MIN) <u>-90 @ 2-3 GHz</u>	Force to Engage and Disengage (In-Lbs MAX) <u>2.0</u>	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray
Corona, 70,000 Ft (VRMS MIN) <u>250</u>	Center Contact Captivation Axial (Lbs) <u>6.0</u>	
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level <u>1,000</u>	Radial (In-Oz) <u>N/A</u>	
Contact Resistance (Milliohms MAX) Center Contact <u>4.0</u>	Cable Retention Axial Force (Lbs MIN) <u>30</u>	
Outer Contact <u>2.0</u>	Torque (In-Oz) <u>16</u>	
Cable to Housing <u>0.5</u>	Weight (Grams) <u>TBD</u>	
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) <u>670</u>		
I.R.(Megohms MIN) <u>5,000</u>		

.XXX = in  
 XX.X = mm

COMPONENT	MATERIAL	FINISH	1051114-1																														
THIS DRAWING IS A CONTROLLED DOCUMENT.			PART NUMBER																														
DIMENSIONS: INCHES[mm]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	<table border="1"> <tr> <td>DWN R.B.G.</td> <td>11-19-76</td> <td rowspan="2"><b>tyco</b> Electronics</td> <td colspan="2">Tyco Electronics Corporation Harrisburg, PA 17105-3608</td> </tr> <tr> <td>CHK E.C.A.</td> <td>11-23-76</td> <td colspan="2">NAME OSM HIGH FREQUENCY, RIGHT ANGLE CABLE PLUG DIRECT SOLDER</td> </tr> <tr> <td></td> <td></td> <td>APVD R.M.F.</td> <td>12-2-76</td> <td></td> </tr> <tr> <td></td> <td></td> <td>PRODUCT SPEC</td> <td colspan="2">-</td> </tr> <tr> <td></td> <td></td> <td>APPLICATION SPEC</td> <td colspan="2">-</td> </tr> <tr> <td></td> <td></td> <td>WEIGHT</td> <td colspan="2">-</td> </tr> </table>			DWN R.B.G.	11-19-76	<b>tyco</b> Electronics	Tyco Electronics Corporation Harrisburg, PA 17105-3608		CHK E.C.A.	11-23-76	NAME OSM HIGH FREQUENCY, RIGHT ANGLE CABLE PLUG DIRECT SOLDER				APVD R.M.F.	12-2-76				PRODUCT SPEC	-				APPLICATION SPEC	-				WEIGHT	-	
DWN R.B.G.	11-19-76	<b>tyco</b> Electronics	Tyco Electronics Corporation Harrisburg, PA 17105-3608																														
CHK E.C.A.	11-23-76		NAME OSM HIGH FREQUENCY, RIGHT ANGLE CABLE PLUG DIRECT SOLDER																														
		APVD R.M.F.	12-2-76																														
		PRODUCT SPEC	-																														
		APPLICATION SPEC	-																														
		WEIGHT	-																														
MATERIAL	FINISH	SIZE	CAGE CODE	DRAWING NO																													
-	-	A3	00779	1051114-1																													
CUSTOMER DRAWING			RESTRICTED TO	-																													
SCALE 5:1			SHEET 1 of 1	REV B																													