Art.-Number: 703440

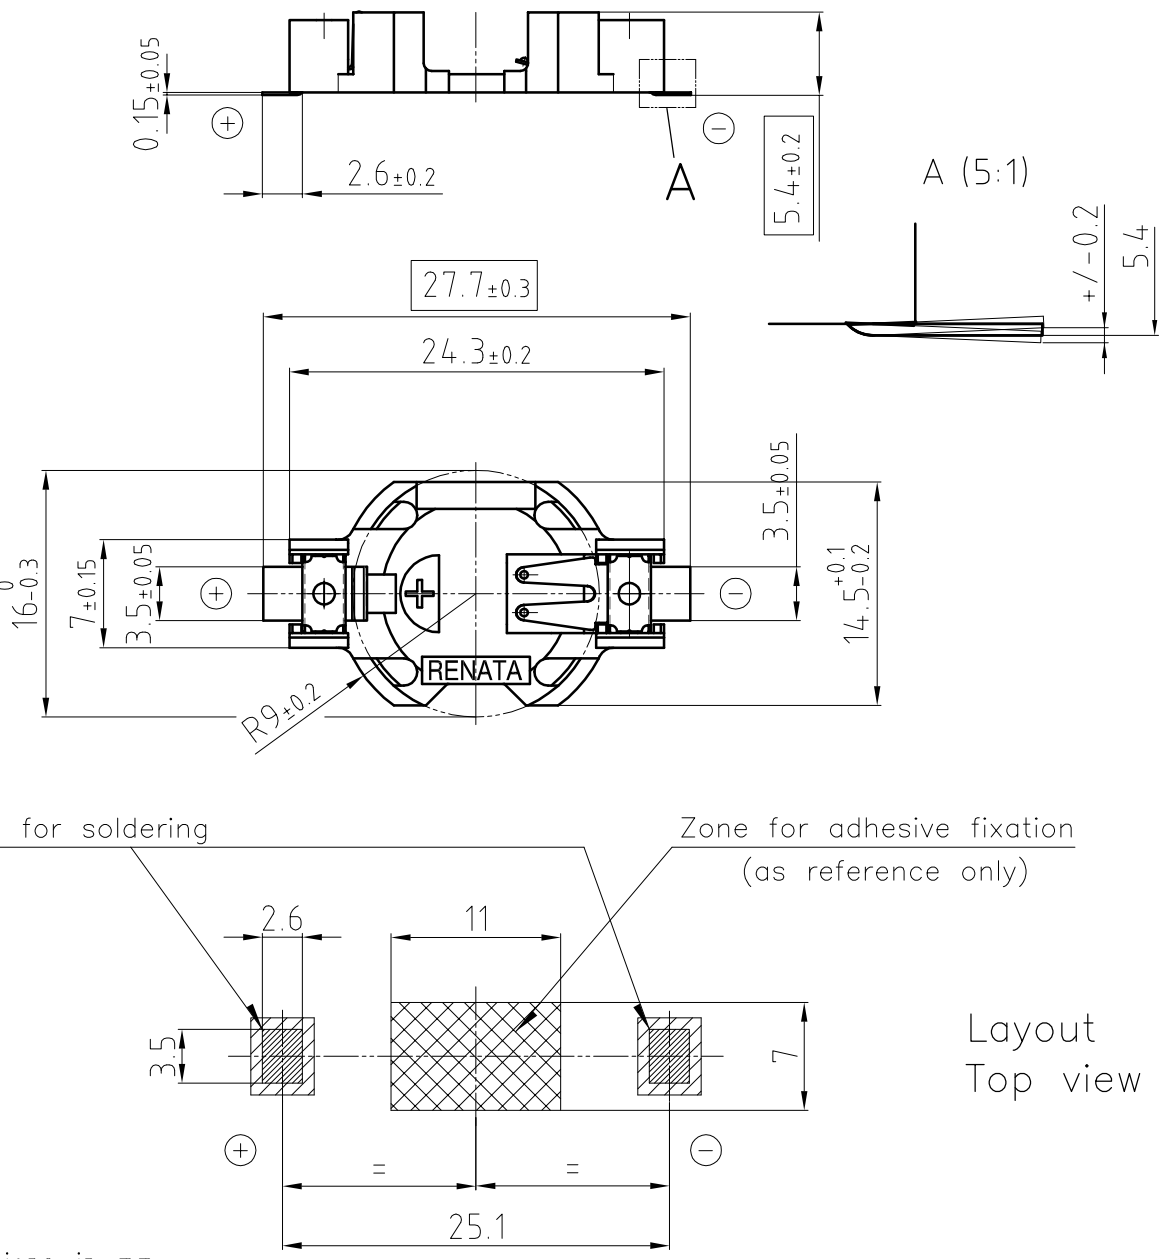

- Samples can deviate in the execution from the serie.

- Dimensions and tolerances can be specified only after the testing of the devices for the mass production definitely

All dimensions in mm;
Holder material: heat resistant, glass-fiber reinforced LCP, flammability rating UL94 V-0;
Battery contacts: spring stainless steel 301 nickel plated throughout, min thickness 3.5um;
Solder contacts: spring stainless steel 301 solder area matte tin-plated throughout, min. thickness 5um;
Finish for solderability according to MIL-STD 883H method 2003.9.

All framed values will be used for dimension checking !

Rev.	○			Rev.	○				Customer's Approval		
Rev.	○			Rev.	○				Date		
Rev.	○			Rev.	○				Signature		
Titel: SMTU1632-C								Scale 2:1	Drawn	12.11.12	PWu
									Checked		
									Approved	29.05.13	MDi

renata batteries

CH-4452 Itingen
Switzerland

10.1004.4-