
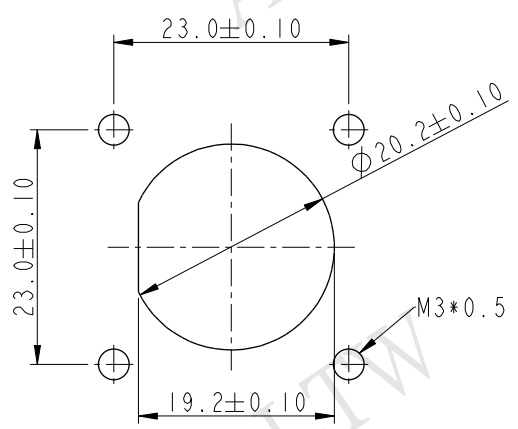


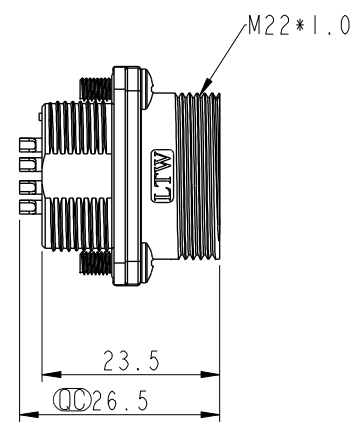





THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2012/10/22	Ruru	LD20-14PMFS-SS8001 To LD20-14PMFS-SW8001
B	LE31650238	2016/05/04	Vicky	Update Note

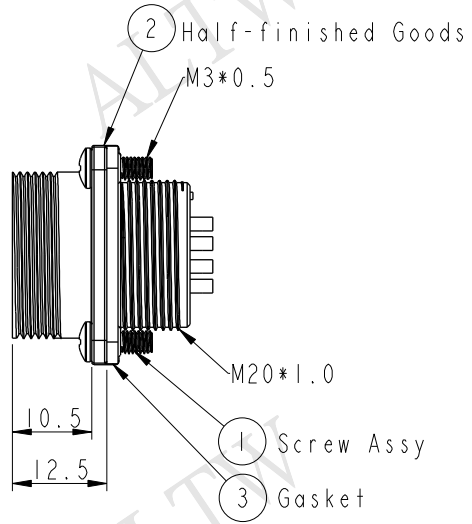

Recommend Panel Cut-Out

Assembly Instruction

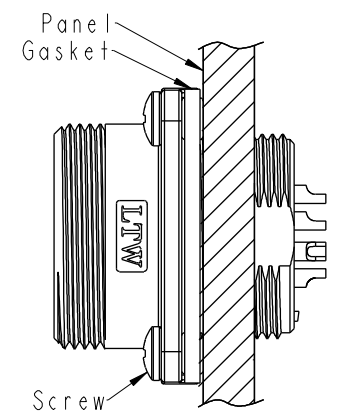

- Note:**
- * $\varnothing$ Important Dimension.
 - * Waterproof Rate: IP68.
IP68: 1M depth of water in 24 Hrs.
(防水等級: IP68)
IP68: 水深一米測試 24 小時
 - * Shell: Zinc Alloy#3, Ni Plated, Silver.
 - * Insulation: Nylon, Black.
 - * Female Pin: Copper Alloy, Silver Plated.
 - * Gasket: Silicone, Gray.
 - * Screw: Stainless Steel.
 - * Recommended Panel Thickness 9mm(Max).

UNIT:mm		TITLE		ITEM NO		DRAWN BY		DATE	
		PANEL SCREW 14PIN M CONN F PIN		LD20-14PMFS-SW8001		Vicky		2016-05-04	
TOLERANCE		SCALE		DWG NO		CHECKED BY		DATE	
.X ±0.25		1:1		LD20-14PMFS-SW8001		Rita		2016-05-04	
.XX ±0.1		SIZE		CUSTOMER		APPROVED BY		DATE	
.XXX ±0.05		A4		ALTW		Lisa		2016-05-04	
ANGLES ±1°		REV.							
		B							
		WC-REV.							
		A.2							
		$\varnothing$ Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司