



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

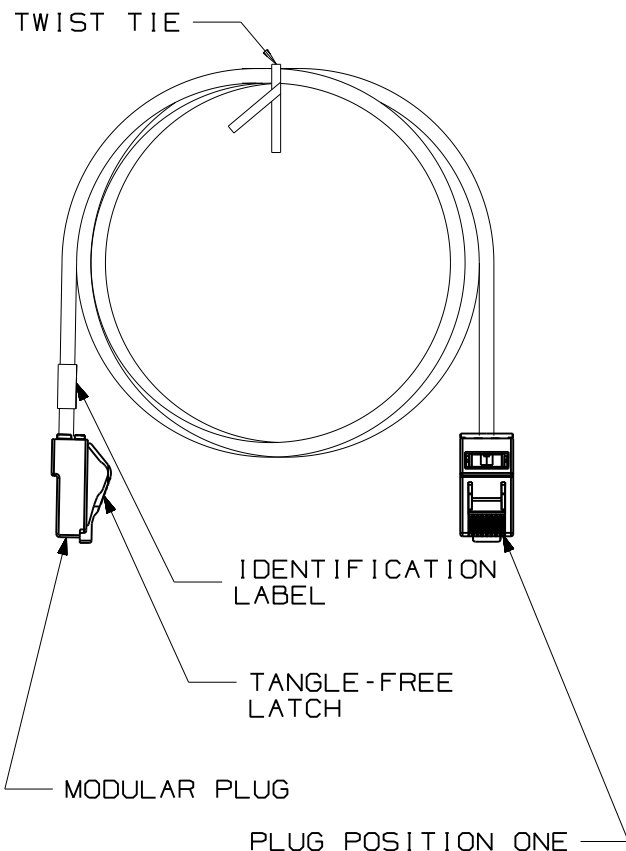

NOTES:

- **1. SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AND TO INDICATE COLOR AND/OR PACKAGE QUANTITY.
2. SEE CATALOG FOR A COMPLETE LIST OF PARTS APPLICABLE FOR USE WITH THIS PART.
3. TERMINATED WITH (8 POSITION) MODULAR PLUGS AT BOTH ENDS PER T568A.
4. CONSTRUCTED WITH 28AWG STRANDED AND TINNED CONDUCTOR CAT5e UTP CM/LSZH PATCH CABLE.
5. MATERIALS:
PLUG: POLYCARBONATE
CONTACTS: GOLD PLATED PHOSPHOR BRONZE
6. NOMINAL CABLE DIAMETER IS 0.150 IN (3.80MM).
7. ALL MATERIALS AND COMPOUNDS USED MUST MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS AMENDED.
8. 100% FACTORY TESTED FOR CAT 5e PERFORMANCE.



T568A WIRING SCHEME	
PLUG POSITION	CABLE WIRE
1	WHITE GREEN
2	GREEN
3	WHITE ORANGE
4	BLUE
5	WHITE BLUE
6	ORANGE
7	WHITE BROWN
8	BROWN

CABLE COLORS	** = COLOR
OFF WHITE	--
BLACK	BL
BLUE	BU
RED	RD
YELLOW	YL
GREEN	GR
ORANGE	OR
VIOLET	VL

SEE SHEET 2 FOR PATCH CORD LENGTHS AND PART NUMBERS

SIZE

A

DRAWING FILENAME

11M215BB_DC02/00B

TX5e UTP 28AWG COPPER PATCH CORDS (CM/LSZH) CUSTOMER DRAWING

PANDUIT[®]
TINLEY PARK, IL 60487

I.I. NUMBER

PRODUCT SPEC/ PKG SPEC

ASSY METHOD/ TEST METHOD


SCALE
NONE

PART NO.

A UTP28CHXX**

DRAWING NO.

11M215BB-02
SHEET 1 OF 2



THIRD ANGLE
PROJECTION

ALL DIMENSIONS ARE GIVEN IN INCHES,
UNLESS OTHERWISE SPECIFIED.
DIMENSIONAL TOLERANCES ARE:
(.X) ±.06(1.5)(.XXX) ±.010(.3)
(.XX) ± ANGLES ±

DRAWN BY
BJN

REVIEW DRAWING NUMBERS

DATE
7-18-11

MAT'L

CHK'D
WFM

1	9-19-11	BJN	WFM	G. REMVD GRAY FROM CABLE COLORS F. ADDED NOTES 7 & 8 E. ADDED CONTACTS: GOLD PLATED PHOSPHOR BRONZE TO NOTE 5 D. ADDED "AND TINNED CONDUCTOR" C. ADDED LSZH PATCH CABLE B. ADDED METRIC PART NUMBERS A. CHGD FROM NETKEY NK5EXX** TO PANNET UTP28CHXX**	11M215BB-02	WFM	EJH		
R	7-18-11	BJN	WFM	RELEASED TO PRODUCTION	11M215BB-02	WFM	WFM		
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


TX5e UTP 28AWG
PATCH CORDS

PANDUIT PART NUMBER	MIN. CABLE LENGTH	PANDUIT PART NUMBER	MIN. CABLE LENGTH
UTP28CH1**	1 FT.	UTP28CH0.5M**	0.5 METER
UTP28CH2**	2 FT.	UTP28CH1M**	1 METER
UTP28CH3**	3 FT.	UTP28CH1.5M**	1.5 METER
UTP28CH4**	4 FT.	UTP28CH2M**	2 METER
UTP28CH5**	5 FT.	UTP28CH2.5M**	2.5 METER
UTP28CH6**	6 FT.	UTP28CH3M**	3 METER
UTP28CH7**	7 FT.	UTP28CH3.5M**	3.5 METER
UTP28CH8**	8 FT.	UTP28CH4M**	4 METER
UTP29CH9**	9 FT.	UTP29CH4.5M**	4.5 METER
UTP28CH10**	10 FT.	UTP28CH5M**	5 METER
UTP28CH11**	11 FT.	UTP28CH5.5M**	5.5 METER
UTP28CH12**	12 FT.	UTP28CH6M**	6 METER

B

UTP28CH13**	13 FT.
UTP28CH14**	14 FT.
UTP28CH15**	15 FT.
UTP28CH16**	16 FT.
UTP28CH17**	17 FT.
UTP28CH18**	18 FT.
UTP28CH19**	19 FT.
UTP28CH20**	20 FT.

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	7-18-11	BJN	WFM	SEE SHEET 1 FOR REVISIONS	11M215BB-02	WFM	EJH		
R	7-18-11	BJN	WFM	SEE SHEET 1 FOR REVISIONS	11M215BB-02	WFM	WFM		

MODEL FILENAME		SIZE
DRAWING FILENAME		A
11M215BB_DC02/00B		
c TX5e UTP 28AWG COPPER PATCH CORDS (CM/LSZH) CUSTOMER DRAWING		
PANDUIT [®] TINLEY PARK, IL 60487		I.I. NUMBER
		PRODUCT SPEC/ PKG SPEC
 ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ±.06(1.5)(.XXX) ±.010(.3) (.XX) ± ANGLES ±		ASSY METHOD/ TEST METHOD
DRAWN BY BJN		SCALE NONE
DATE 7-18-11		PART NO. A UTP28CHXX**
CHK'D WFM		DRAWING NO. 11M215BB-02 SHEET 2 OF 2