




TOP VIEW

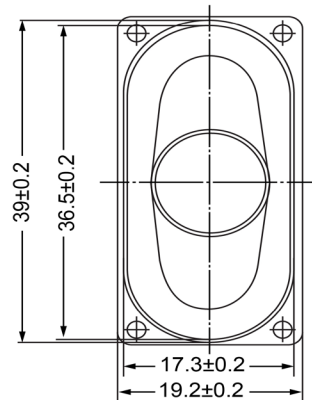

SIDE VIEW

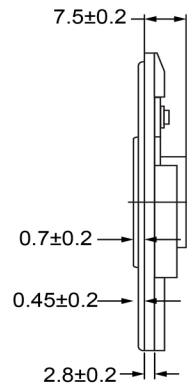

BOTTOM VIEW

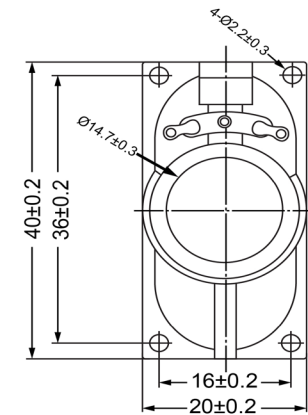

Specifications			Notes	Revision History						
Description	Value	Unit		Version	Description		Date	Approved		
Shape	Oval		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		10/21/2013	J.S		
Resonant Frequency	600	(Hz)								
Frequency Range	600 ~ 20,000	(Hz)								
SPL @ 10cm	90	(dBA)								
Impedance	16	(Ohm)								
Cone Material	Mylar									
Nominal Power	0.25	(W)								
Max Power	0.5	(W)								
Mount Type	Frame									
Operating Temperature	-25 ~ +55	°C								
Storage Temperature	-25 ~ +55	°C								
Weight	6.3	(g)								
 DB UNLIMITED				Drawn by		Date	Checked by	Date	Approved by	Date
				A.B.		10/21/2013	C.E.	10/21/2013	J.S	10/21/2013
			Dynamic Speaker		SM400616-1					