




THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	20
© COPYRIGHT 20	ALL RIGHTS RESERVED.	

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	APVD
FT	0		-	SEE SHEET 1	-	-

NOTES:

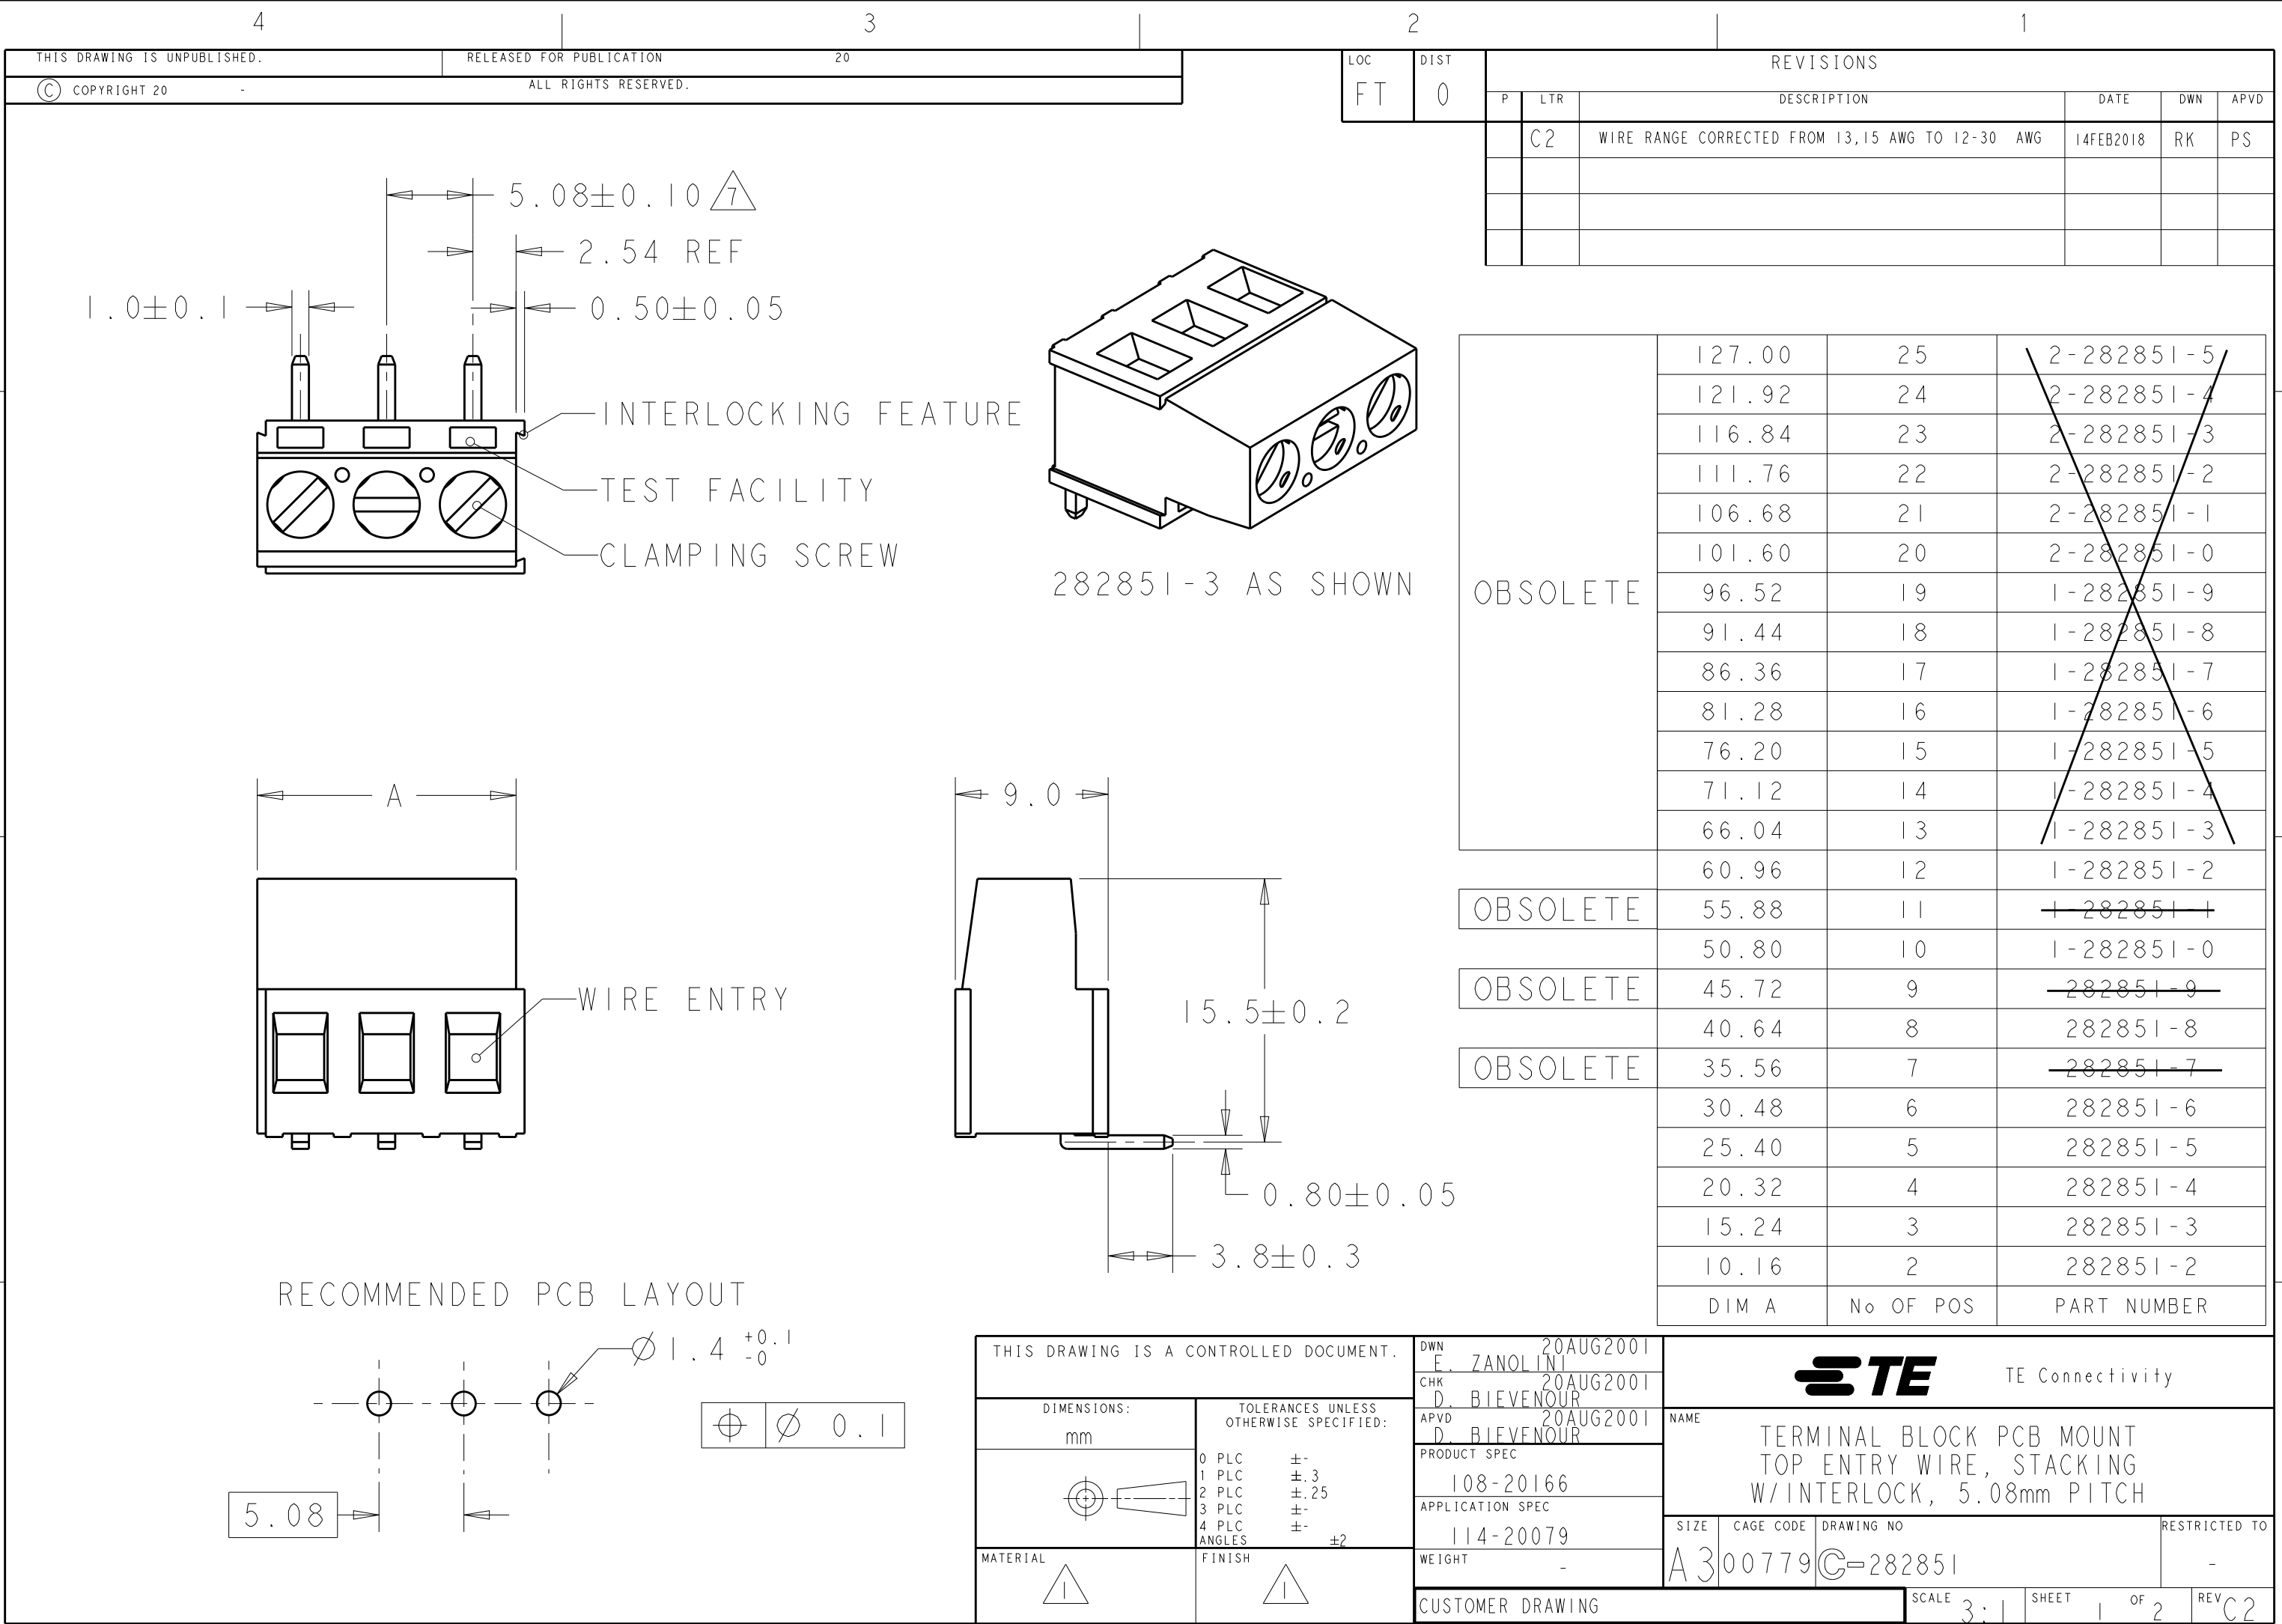

MATERIALS AND FINISH
HOUSING: PA 6-6, UL 94-V0, COLOR GREEN.
CLAMP: BRASS, NICKEL PLATED.
TERMINAL: BRASS, TIN PLATED.
CLAMPING SCREW: M3, BRASS, NICKEL PLATED.

2 MECHANICAL PROPERTIES
MIN. PC BOARD HOLES DIAMETER : 1,4mm
MAX. PC BOARD THICKNESS : 2,4mm.
RECOMMENDED/HIGHEST TIGHTENING TORQUE: 0,5/0,6 Nm.

3 END-TO-END STACKABLE W/INTERLOCK WITHOUT LOSS OF CENTERLINE SPACING.


4 ELECTRICAL PROPERTIES
WIRE RANGE:
- SOLID WIRE : 0,05-2,5mm² (12-30 AWG).
- STRANDED WIRE : 0,05-2,5mm² (12-30 AWG).
MAX. VOLTAGE : 300 V
MAX CURRENT : 24 A
CONTACT RESISTANCE : <15 m Ohm
INSULATION RESISTANCE : >1000 M Ohm (500V DC)

5 RECOGNIZED UNDER THE COMPONENT PROGRAM OF UNDERWRITERS LABORATORIES INC. FILE NO E60677.

6 IMQ CERTIFICATE WITH SURVEILLANCE IN CONFORMITY WITH IEC 998-1/998-2-1.



NOT CUMULATIVE TOLERANCE.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN E. ZANOLINI 20AUG2001	 TE Connectivity				
DIMENSIONS: mm		CHK D. BIEVENOUR 20AUG2001	NAME TERMINAL BLOCK PCB MOUNT TOP ENTRY WIRE, STACKING W/INTERLOCK, 5.08mm PITCH				
		APVD D. BIEVENOUR 20AUG2001					
MATERIAL -	FINISH -	PRODUCT SPEC -					
		APPLICATION SPEC -					
		WEIGHT -					
		CUSTOMER DRAWING	SIZE A3	CAGE CODE 00779	DRAWING NO C-282851	RESTRICTED TO -	
			SCALE 3:1		SHEET 2	OF 2	REV C2