

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0522711479

Status:

Active

Overview:

Description:

1.00mm (.039") Pitch FFC/FPC Connector, Right Angle, SMT, ZIF, Bottom Contact Style, 14 Circuits, Lead-free, High Barrier Packaging

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

FFC/FPC Connectors

Series

52271

Overview

ffc_fpc_smt

Product Name

N/A

Physical

Circuits (Loaded)

14

Color - Resin

Natural

Contact Position

Bottom

Durability (mating cycles max)

30

Entry Angle

90° Angle

Flammability

94V-0

Mated Height (in)

0.118 In

Mated Height (mm)

3.00 mm

Material - Metal

Phosphor Bronze

Material - Plating Mating

Tin-Bismuth

Material - Plating Termination

Tin-Bismuth

Material - Resin

Nylon

Number of Rows

1

Orientation

Right Angle

PCB Locator

No

PCB Retention

Yes

Packaging Type

Embossed Tape on Reel

Pitch - Mating Interface (in)

0.039 In

Pitch - Mating Interface (mm)

1.00 mm

Polarized to PCB

Yes

Stackable

No

Temperature Range - Operating

-40°C to +85°C

Termination Interface: Style

Surface Mount

Wire/Cable Type

FFC/FPC

Electrical

Current - Maximum per Contact

0.5A

Voltage - Maximum

50V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Application Specification

AS-52271-001

Packaging Specification

SPK-52271-001, SPK-52271-002

Product Specification

PS-52271-053, RPS-52271-066, RPS-52271-067, RPS-52271-069, RPS-52271-070, RPS-52271-072, RPS-52271-073, RPS-52271-075, RPS-52271-080, RPS-52271-085, RPS-52271-087, RPS-52271-091

Sales Drawing

SD-52271-036, SD-52271-037

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Halogen-Free

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

52271Series

This document was generated on 06/04/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION


E

D

±MM DIMENSIONS IN METRIC DO NOT SCALE DRAWING

A

8 7 6 5 4 3 2 1

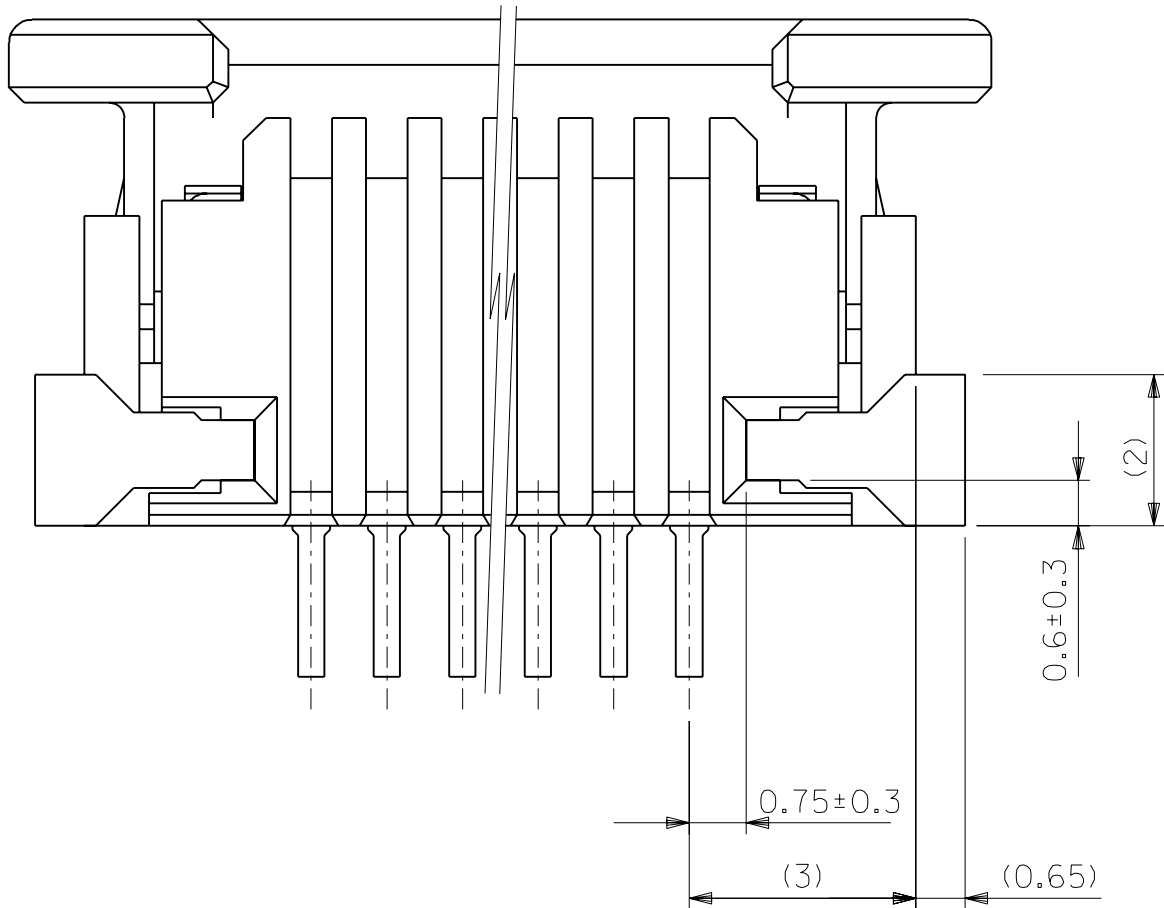

下面図

注記 NOTES

- ① 接点部までの嵌合長さ。
LENGTH TO CONTACT POINT.
2. 使用材料 MATERIAL
ハウジング : 46ナイロン, UL94V-0
HOUSING : 46NYLON, UL94V-0
アクチュエータ : PPS, UL94V-0
ACTUATOR : PPS, UL94V-0
ターミナル : リン青銅 (t=0.25)
TERMINAL : PHOS-BRO. (t=0.25)
メッキ : 錫ビスマスメッキ 1. 0マイクロメートル以上
PLATING : TIN-BISMUTH 1.0 MICROMETER MINIMUM
: ニッケル下地 1. 0マイクロメートル以上
PLATING : NICKEL (UNDER PLATING) 1.0 MICROMETER MINIMUM
金具 : 銅合金 (t=0.25)
FITTING NAIL : COPPER ALLOY (t=0.25)
メッキ : 錫メッキ 1. 0マイクロメートル以上
PLATING : TIN 1.0 MICROMETER MINIMUM
: ニッケル下地 1. 0マイクロメートル以上
PLATING : NICKEL (UNDER PLATING) 1.0 MICROMETER MINIMUM
- ③ パターンはくり止め用金具
FITTING NAIL FOR PREVENTION OF PEELING OF P.C.B. PATTERN.
4. エンボステーブル梱包時は、アクチュエータがロックした状態とする。
WHEN CONNECTOR IS SHIPED, ACTUATOR SHOULD BE LOCKED.
- ⑤ FPC挿入深さ。
INSERTION DEPTH OF FPC
- ⑥ パターン書き込み禁止エリア。
NO FOOT PRINT AREA.
7. 本製品は52271-**-17の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 52271-**-17.

FPCについて：
打抜き方向は導体側から補強板側を推奨致します。
補強フィルム材質はポリイミドを推奨致します。
接着剤は熱硬化接着剤を推奨致します。

ABOUT FPC:
RECOMMENDED PUNCHER DIRECTION : FROM CONDUCTOR SIDE TO STIFFENER BOARD SIDE.
RECOMMENDED MATERIAL :
STIFFENER FILM : POLYIMIDE
BONDING AGENT : THERMOSETTING BONDING AGENT

				MODEL NO.		52271-**-19	
				材料 MATERIAL	注記参照 SEE NOTES	molex MOLEX-JAPAN CO.,LTD. 日本モレックス株式会社	
				仕上げ FINISH	注記参照 SEE NOTES	REVISE ONLY ON CAD SYSTEM	
				適用電線範囲 WIRE RANGE	—//—	TITLE 名称 I.O FPC CONN. Z.I.F. SMT (BOTTON CONTACT) -LEAD FREE-	
				被覆外径 INS. RANGE	—//—	DWG. NO. (SHEET 2 OF 2) REV SD-52271-036 B	
				DRAWN BY '04/03/12 H.KAWABATA	CHK'D BY '04/03/12 K.TOJO		
				APP'D BY '04/03/12 M.SASAO	尺度 SCALE —//—		
角度 ANGLE	±3°			記号 LTR	変更内容 REVISION RECORD	DR. CHK.	日付 DATE
30 以上 OVER	±0.3	B	変更 REVISED (J2004-355)	H.K	K.T	04/04/02	
10 以上 30 未満 OVER 30 UNDER	±0.25	A	変更 REVISED (J2004-337)	H.K	K.T	04/03/25	
10 未満 UNDER	±0.2	O	新規作成 RELEASED (J2004-3059)	H.K	K.T	04/03/12	
一般公差 GENERAL TOLERANCES							

8 7 6 5 4 3 2 1

10

9

8

7

6

5

4





3

2

1

NOTES

- 製品番号 52271-**-19 の梱包状態はアクチュエータがロックした状態とする。
詳細寸法については 図面 SD-52271-036 を参照下さい。
IN THE PACKAGE, ACTUATOR OF PART NO. 52271-**-19 SHOULD BE LOCKED
RE DETAILED DIMENSIONS, SEE SD-52271-036.
- 梱包数量: 1000個/リール
NUMBER OF CONNECTORS: 1000 PCS/REEL
- リードテープ長さ LEAD TAPE LENGTH
トップテープ リーダー部 TOP TAPE LEADER PART 175 ±25
トップテープ 未接着部 TOP TAPE NON-BONDED PART 25 ±5
- トップテープの剥離強度: 0.1~1.3N {10~130gf} (剥離方向は下図参照)
尚、本規格値は、出荷時に適用。(但し、輸送時に剥離が発生しない事。)
PEELING OFF FORCE OF TOP TAPE: 0.1~1.3N {10~130gf}
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT
PEEL OFF SHOULD NOT BE ALLOWED, DURING TRANSPORTATION
- 材料 (MATERIAL)
キャリアテープ (CARRIER TAPE): ポリプロピレン (POLYPROPYLENE)
トップテープ (TOP TAPE): PET, PE, PEF
リール (REEL): ポリスチレン (PS) <リサイクル材を含む>
POLYSTYRENE (PS) <RECYCLE MATERIAL CONTAINED>
- 本製品は52271-**-19の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 52271-**-90.
- 本製品は乾燥剤入り、ハイバリア梱包仕様である。
THIS PRODUCT IS HIGH BARRIER PACKAGE WITH DESICCANT.

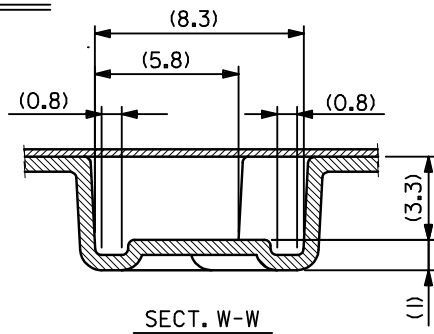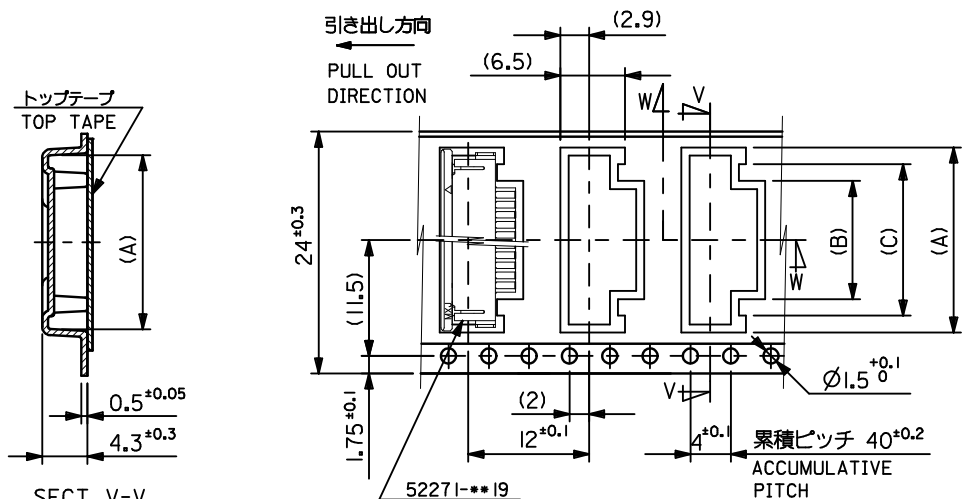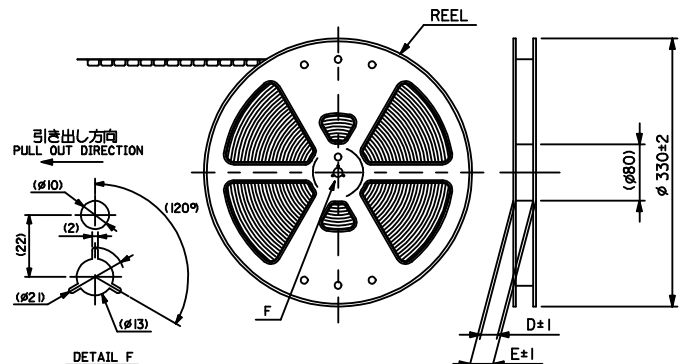

52271-**-19	MODEL NO.	CARRIER TAPE WIDTH	E	D	24	29.4	25.4	15	11.4	18.3	52271-1179	11
								14	10.4	17.3	-1079	10
								13	9.4	16.3	-0979	9
								12	8.4	15.3	-0879	8
								11	7.4	14.3	-0779	7
								10	6.4	13.3	-0679	6
								9	5.4	12.3	-0579	5
								8	4.4	11.3	52271-0479	4

REVISED	EC NO. J2009-2061	DRWN:TKN	CHKD:HMATSUMOTO	APPR:NUKITA	2009/05/20	2009/05/21	2009/05/21	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	TITLE	MOLEX INCORPORATED	SHEET NO.
A									10 UNDER ±0.2	MM ONLY	---	METRIC	☉	EMBOSSED TAPE PACKAGE FOR 52271-**-19 -LEAD FREE-	SD-52271-037	1 OF 3
									10 OVER 30 UNDER ±0.25							
									30 OVER ±0.3							
									ANGULAR ±3°							
									DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							
										SIZE A3						
										THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

F

E

D

C

B

A

F






E

D

C

B

A

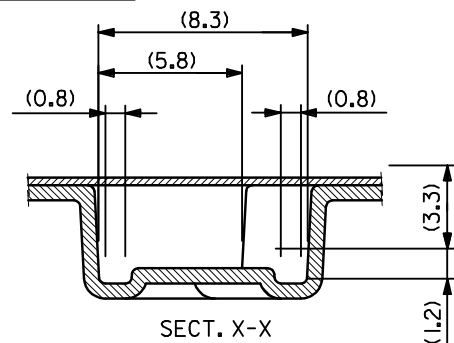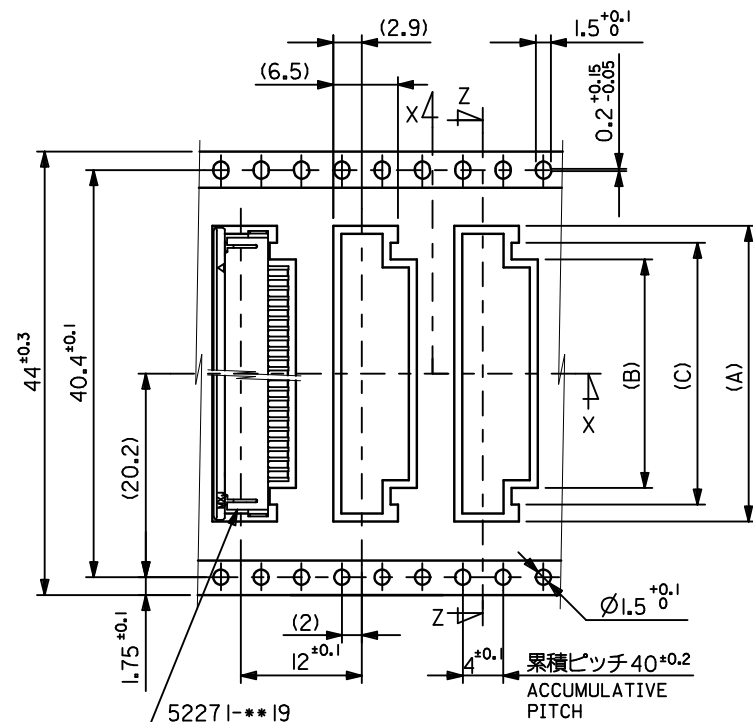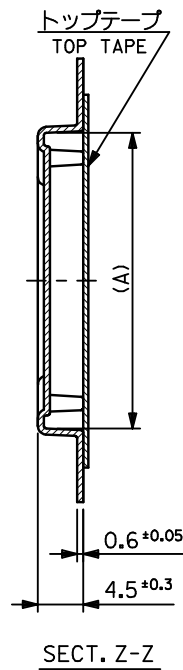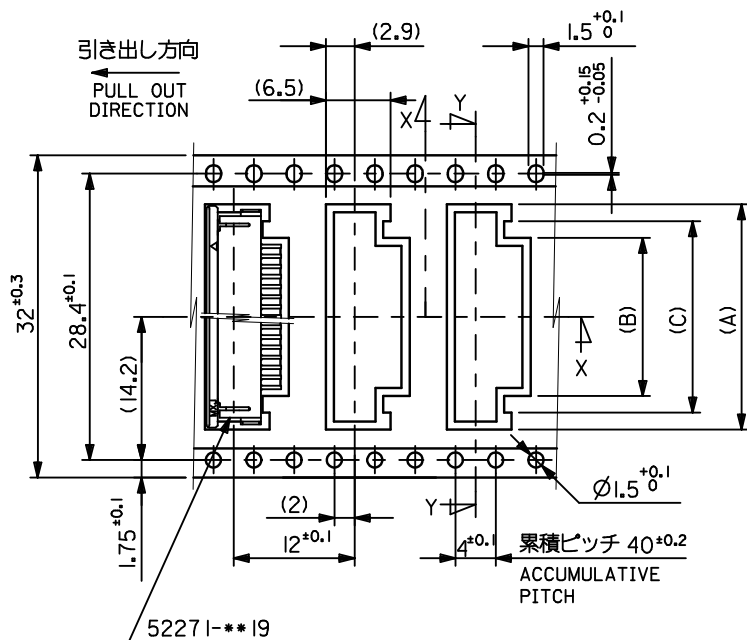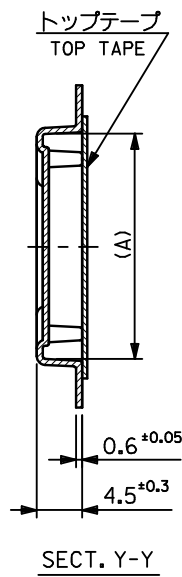

44	49.4	45.4	31	27.4	34.35	52271-2779	27
			30	26.4	33.35	-2679	26
			29	25.4	32.35	-2579	25
			28	24.4	31.35	-2479	24
			27	23.4	30.35	-2379	23
			26	22.4	29.35	-2279	22
			25	21.4	28.35	-2179	21
			24	20.4	27.35	-2079	20
			23	19.4	26.35	-1979	19
			22	18.4	25.35	-1879	18
			21	17.4	24.35	-1779	17
			20	16.4	23.35	-1679	16
			19	15.4	22.35	-1579	15
			18	14.4	21.35	-1479	14
32	37.4	33.4	17	13.4	20.35	-1379	13
			16	12.4	19.35	52271-1279	12
			(C)		(B)	(A)	MATERIAL NO.
			E		D		電 装 部

REVISED EC NO.: J2009-2061 2009/05/20 DRWN:TKON CHKD:MATSUMOTO 2009/05/21 APPR:NUKITA 2009/05/21 REV DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
	10 UNDER	±0.2	DRAWN BY H.KAWABATA	DATE 2004/03/12	TITLE EMBOSSD TAPE PACKAGE FOR 52271-**-19 -LEAD FREE-			
	10 OVER 30 UNDER	±0.25	CHECKED BY K.TOJO	DATE 2004/03/12	MOLEX INCORPORATED			
	30 OVER	±0.3	APPROVED BY M.SASAO	DATE 2004/03/12	SD-52271-037			
ANGULAR ±3°			MATERIAL NO. SEE TABLE		DOCUMENT NO.	SHEET NO. 2 OF 3	EN-02JA(021)	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

10 9 8 7 6 5 4 3 2 1

F



E

D

C

B

A

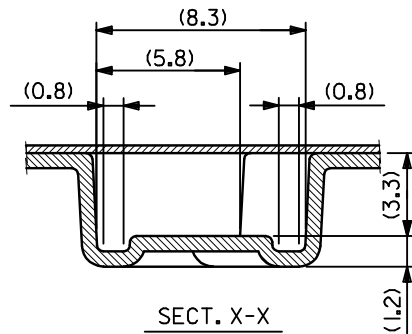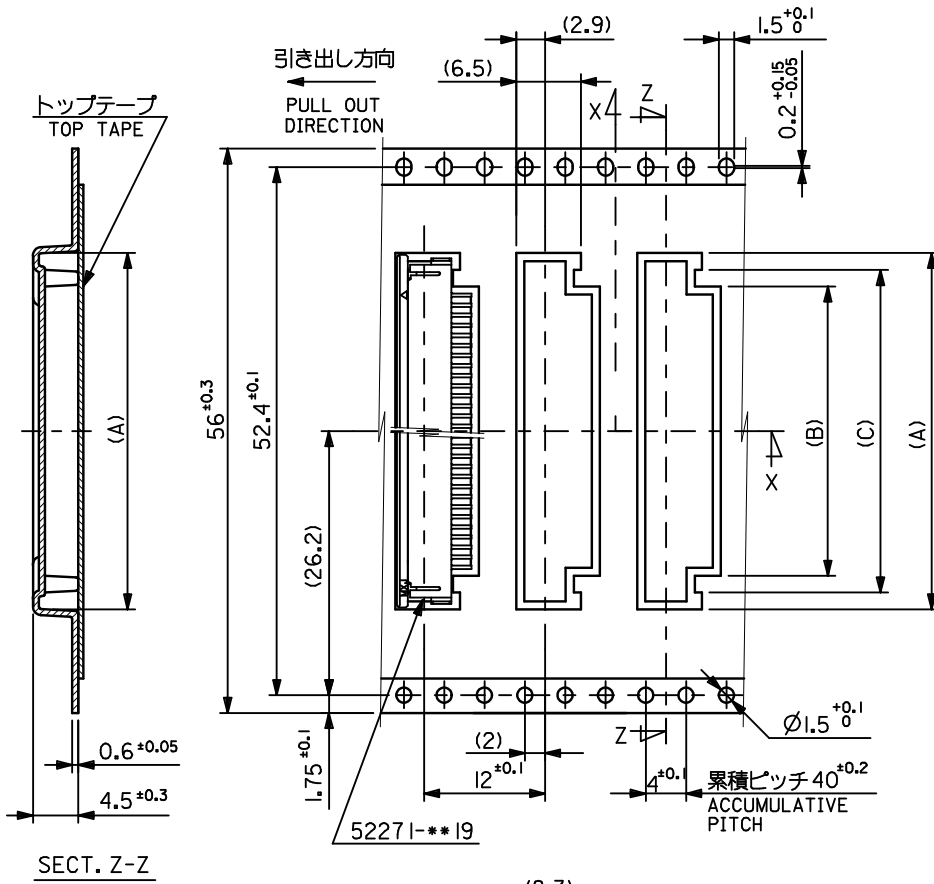

56	61.4	57.4	34	30.4	37.35	5227I-3079	30
			33	29.4	36.35	5227I-2979	29
			32	28.4	35.35	5227I-2879	28
キャリアテープ幅 CARRIER TAPE WIDTH	E	D	(C)	(B)	(A)	MATERIAL NO.	標 記 CKT.

Rev. E 2006/04/15

9

8

7

6

5

4

3

2

EN-02JA(021)

REVISED
EC NO: J2009-2061
2009/05/20
DRWN:TKN
2009/05/21
CHKD:HMATSUMOTO
2009/05/21
APPR:NUKITA
2009/05/21
DESCRIPTION
REV

GENERAL TOLERANCES
(UNLESS SPECIFIED)

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3

ANGULAR ±3°
DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM ONLY

DRAWN BY	DATE
H.KAWABATA	2004/03/12
CHECKED BY	DATE
K.TOJO	2004/03/12
APPROVED BY	DATE
M.SASAO	2004/03/12
MATERIAL NO.	

SEE TABLE

SIZE
A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SCALE

DESIGN UNITS
METRIC

THIRD ANGLE
PROJECTION

MODEL NO.

5227I-**79

EMBOSSSED TAPE PAKEGE
FOR 5227I-**19
-LEAD FREE-

molex

MOLEX INCORPORATED

DOCUMENT NO.

SD-5227I-037

SHEET NO.

3 OF 3