
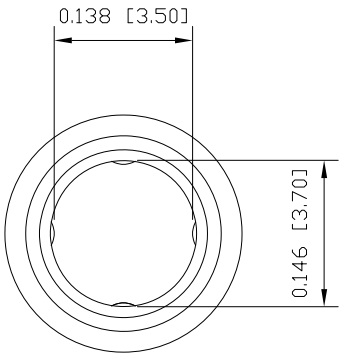


NOTE:



MATERIAL
HOUSING: TPU, BLACK
CONTACT: BRASS
NUT: BRASS
FINISH
CONTACT: GOLD PLATED
OVER 50µ" NICKEL
SATIN NICKEL
NUT:
ELECTRICAL
RATED CURRENT: 1A
RATED VOLTAGE: 60V
INSULATION RESISTANCE: 100 MOhms MIN.
CONTACT RESISTANCE: 10 mOhms MAX.
WATER PROOF: IP67
ENVIRONMENT
OPERATION TEMPERATURE: -40°C TO +85°C
WIRE GAUGE: 26-28 AWG
MATING TORQUE: 1.5 in lbs max.

850-003-103RLUY

1 = GOLD FLASH
4 = 10µ" GOLD

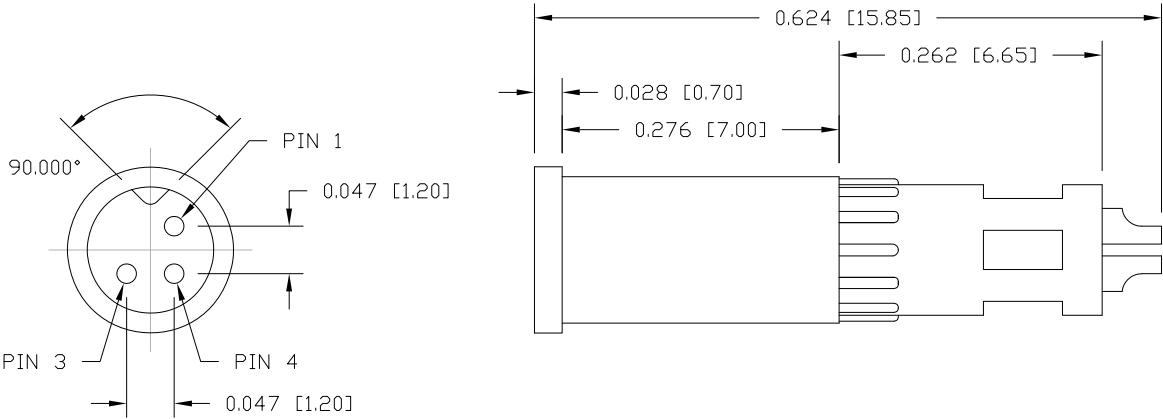

NUT

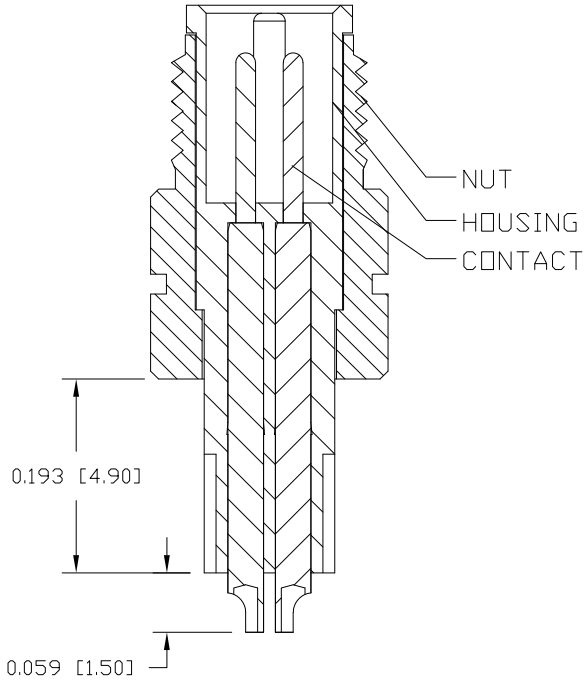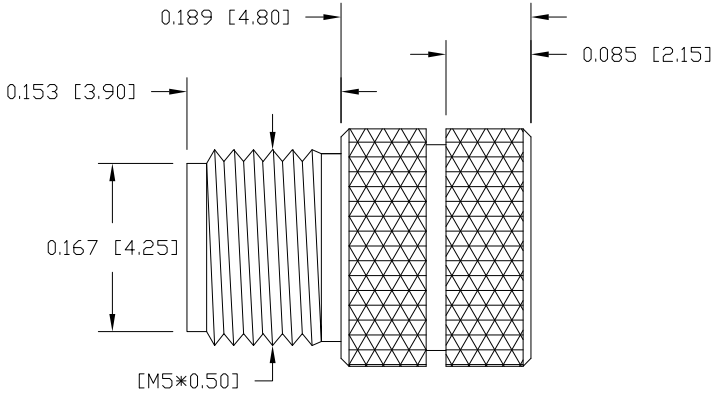

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: M. SIGMON	DATE: 03-04-16	NorComp	SCALE: NTS	SHEET 1	OF 1	REV 4
					DWG NO.	850-003-103RLUY		