
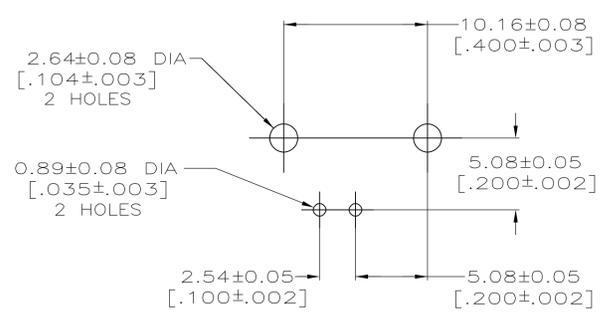
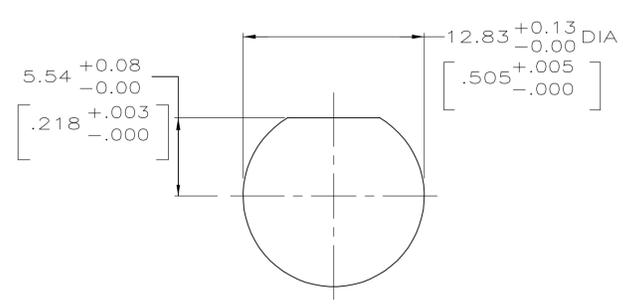
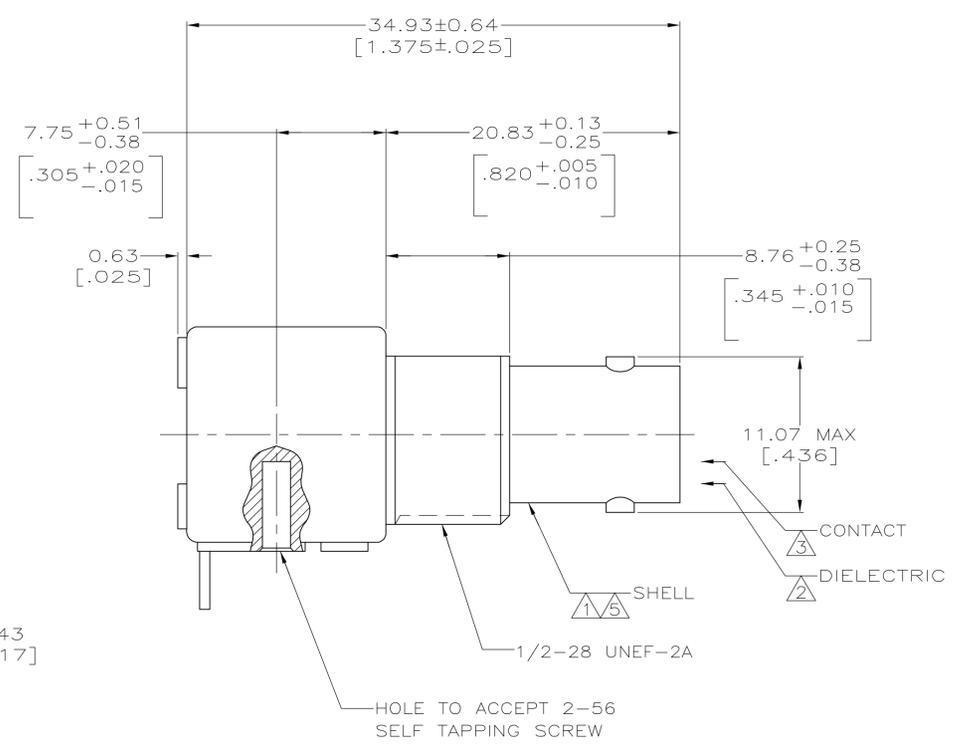


LOC	DIST	REVISIONS				
		REV	DESCRIPTION	DATE	BY	APPROV
AJ	16	D	REVISED PER EC OS14-0499-04	11JULY05	BM	JL

- 1 ZINC PER QQ-Z-363.
 - 2 POLYMETHYLPENTENE, GENERAL PURPOSE.
 - 3 BERYLLIUM COPPER PER QQ-C-530.
 - 4 BRASS PER ASTM-B-453.
 - 5 NICKEL PLATE PER QQ-N-290, 3.81μm [.000150] MINIMUM THICK.
 - 6 TIN PLATE PER ASTM-B-545, 3.81μm [.000150] MINIMUM THICK.
 - 7 GOLD PLATE PER MIL-G-45204, 0.76μm [.000030] MINIMUM THICK.
 - 8 SILVER PLATE PER QQ-S-365, 2.54μm [.000100] MINIMUM THICK.
10. SEE INSTRUCTION SHEET 2769.

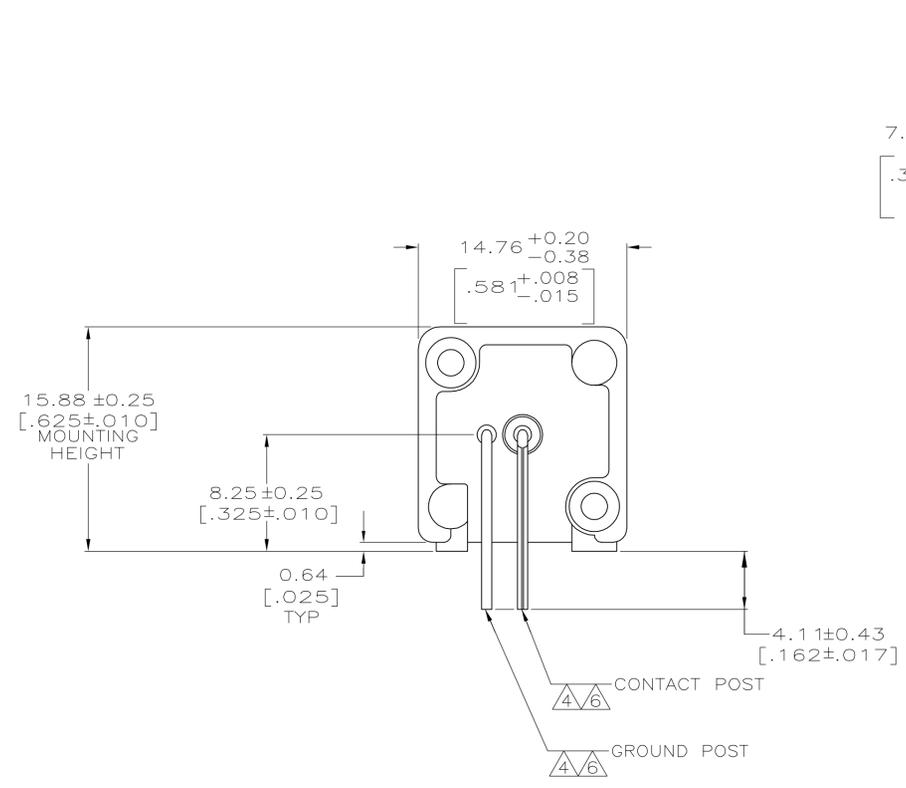

OBSELETE	222093-2
	222093-1
CONTACT FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG J. LIPPERT 2-19-92	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: INCHES		CHK A. GABANY 2-19-92	APPROV A. GABANY 2-19-92	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME JACK, RIGHT ANGLE, PCB 75 OHM, SERIES BNC		
0 PLC ± -		PRODUCT SPEC		
1 PLC ± -		APPLICATION SPEC		
2 PLC ± 0.20 [.008]		SIZE A1		
3 PLC ± -		CAGE CODE 00779		
4 PLC ± -		DRAWING NO 222093		
ANGLES ± -		RESTRICTED TO		
FINISH		WEIGHT		
SEE NOTES 1 THRU 4		CUSTOMER DRAWING		
		SCALE 4:1 SHEET 1 OF 1 REV D		