



**R585 423500**

Page  
1 / 2

## R F CHARACTERISTICS

IMPEDANCE : 50 Ohms

|                 |         |         |         |          |
|-----------------|---------|---------|---------|----------|
| FREQUENCY (GHz) | 0 - 3   | 3 - 8   | 8 -12.4 | 12.4- 18 |
| V.S.W.R. <=     | 1.20    | 1.30    | 1.40    | 1.50     |
| INSERT. LOSS <= | 0.20 dB | 0.30 dB | 0.40 dB | 0.50 dB  |
| ISOLATION >=    | 80 dB   | 70 dB   | 60 dB   | 60 dB    |
| AVER. POWER (*) | 240 W   | 150 W   | 120 W   | 100 W    |

## ELECTRICAL CHARACTERISTICS

|                                 |                                     |
|---------------------------------|-------------------------------------|
| ACTUATOR                        | : FAILSAFE                          |
| NOMINAL CURRENT AT 25° C (±10%) | : 204 mA                            |
| ACTUATOR VOLTAGE (Vcc)          | : 28V (24 to 30V)                   |
| TERMINALS                       | : solder pins (250° C max./30 sec.) |
| INDICATOR RATING                | : 1 W / 30 V / 100 mA               |
| TTL INPUTS (E) - High level     | : 2.2 to 5.5V / 800µA at 5V         |
| - Low level                     | : 0 to 0.8V / 20µA at 0.8V          |

## MECHANICAL CHARACTERISTICS


|                                        |               |                 |
|----------------------------------------|---------------|-----------------|
| CONNECTORS                             | : SMA female  | per MIL C 39012 |
| LIFE                                   | : 10.000.000  | cycles          |
| SWITCHING TIME (nominal voltage;25° C) | : < 10        | ms              |
| CONSTRUCTION                           | : splashproof |                 |
| WEIGHT                                 | : <100        | g               |

## ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C) : -40 , +85  
STORAGE TEMPERATURE RANGE (°C) : -55 , +85

(\* : average power at 25° C)

## DRAWING

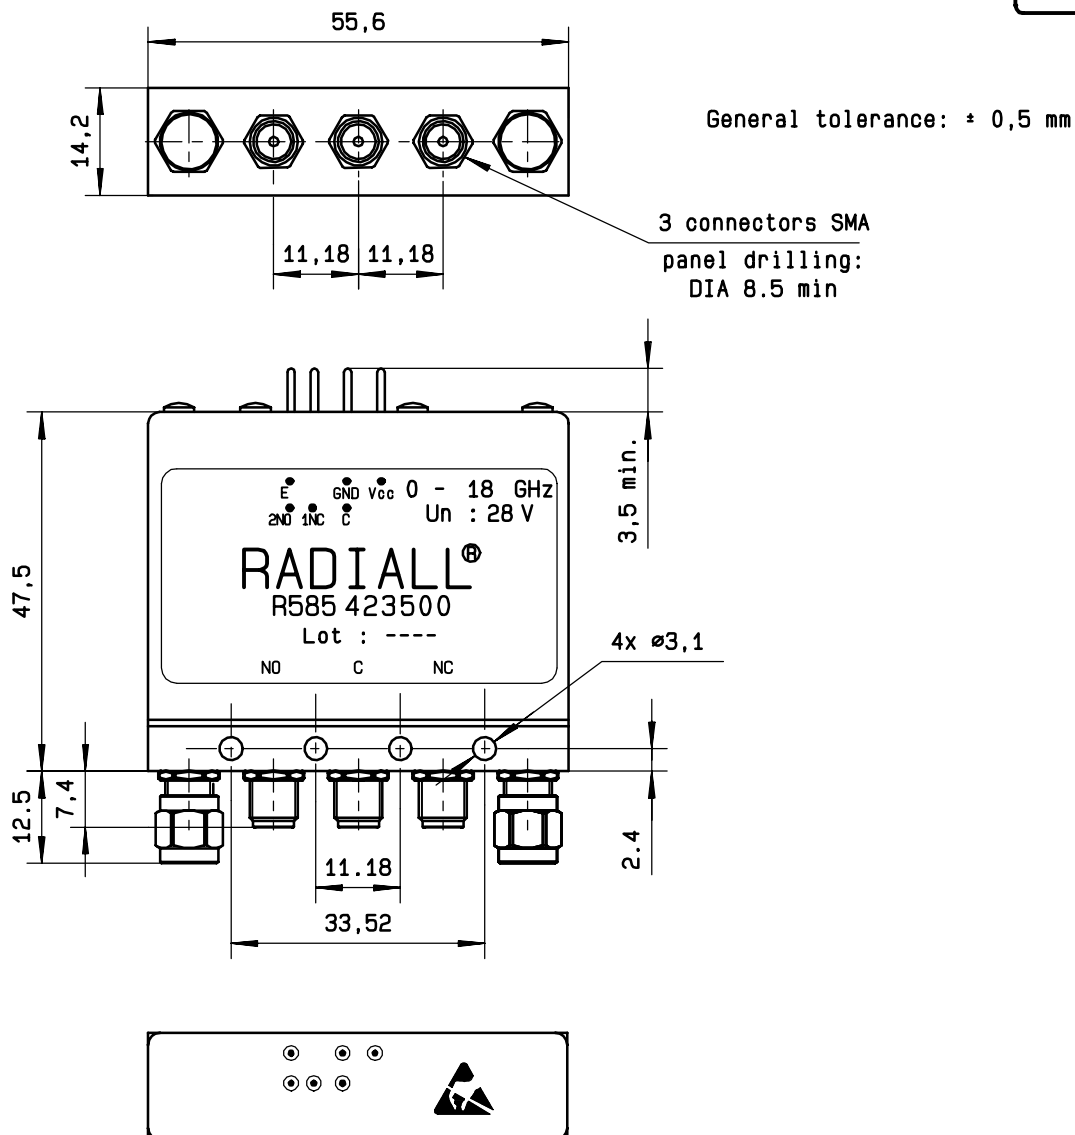

## SCHEMATIC DIAGRAM

