





Heyco® Nylon PCB Supports - Blind and Key Slot Mount

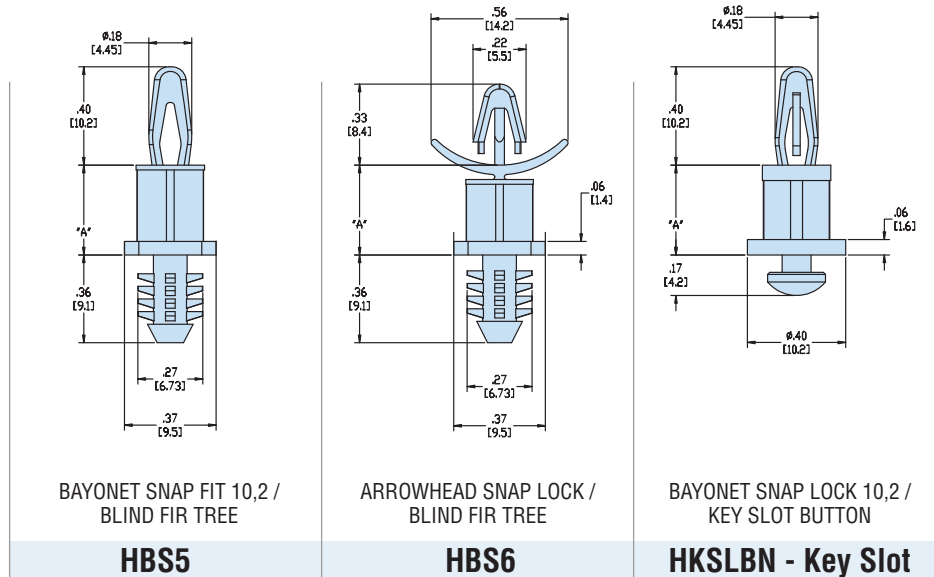

		Minimum Thickness		Mounting Hole Diameter		Minimum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Slot Width	
		in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB		.062	1,6	.157	4,0	.078	2,0	.157	4,0	.062	1,6	.157	4,0
Chassis		.250	6,4	.250	6,4	.250	6,4	.250	6,4	.062	1,6	see diagram	
A		PART NO.		DESCRIPTION		PART NO.		DESCRIPTION		PART NO.		DESCRIPTION	
in.	mm.	Natural				Natural				Natural			
.125	3,2									10611		HKSLBN-02	
.187	4,8	10587		HBS5-03									
.250	6,4	10588		HBS5-04		10596		HBS6-04		10612		HKSLBN-04	
.375	9,5	10589		HBS5-06		10597		HBS6-06		10613		HKSLBN-06	
.437	11,1	10590		HBS5-07									
.500	12,7	10591		HBS5-08		10598		HBS6-08		10614		HKSLBN-08	
.625	15,9	10592		HBS5-10		10599		HBS6-10					
.750	19,1	10593		HBS5-12		10600		HBS6-12					
.875	22,2	10594		HBS5-14		10601		HBS6-14					
1.000	25,4												

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix "F" to Part No.



Material: Nylon 6/6
Flammability Rating: 94V-2
Temperature Range: -40°F (-40°C) to 185°F (85°C)

*Quick
Specs*