

3

2

1


NUMBER
179974

METRIC







METRIC

単位: 寸法 DIMENSIONS IN MM. DO NOT SCALE PRINT

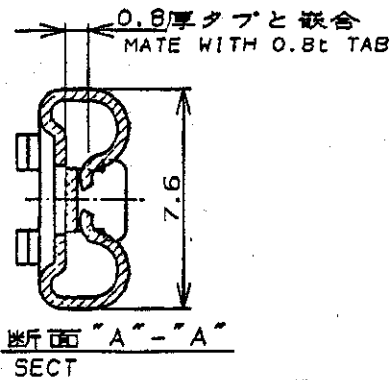

0.5最大
カットオフタブ
0.5 MAX
CUT OFF TAB

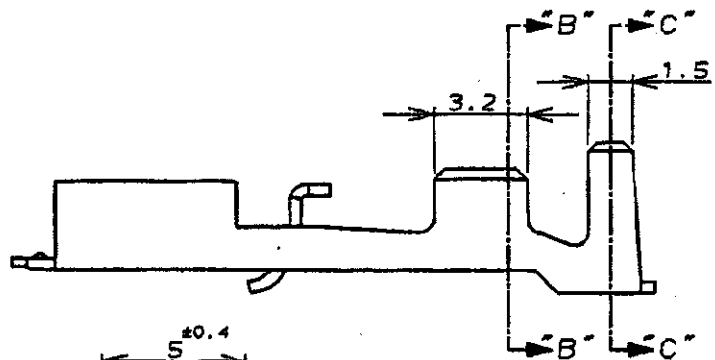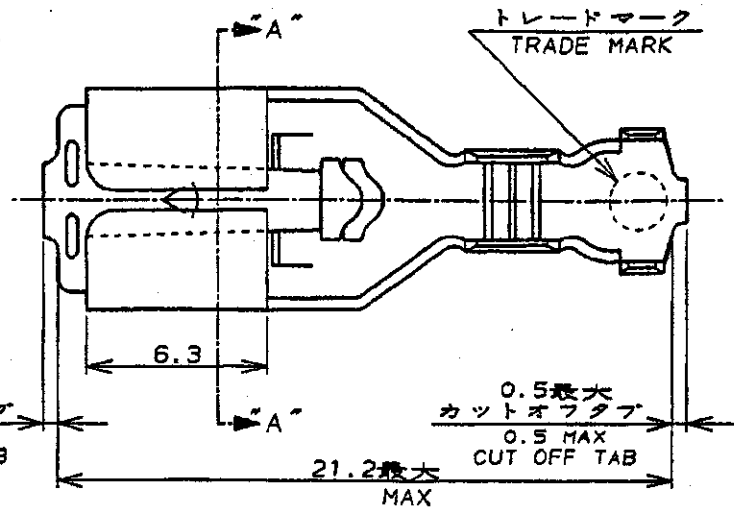

注記:

1. 製品規格 : 108-5437
2. 取付適用規格 : 114-5195
3. 適用ハウジング : 179970-□
1318954-□
4. 取扱説明書 : 411-5691

NOTE:

1. PRODUCT SPEC : 108-5437
2. APPLICATION SPEC : 114-5195
3. APPLICABLE HOUSING P/N : 179970-□
1318954-□
4. INSTRUCTION SHEET : 411-5691

— 11 —	錫めっき高耐熱銅合金 (PRE TINNED HIGH HEAT RESISTANCE COPPER ALLOY)	179974-6
179989-1	錫めっき黄銅 (PRE TINNED BRASS)	179974-1
プラグ端子型番 (L/P No.)	材料 (MATERIAL)	型番 (P/N)
一般公差 (GENERAL TOLERANCE)	包含電線断面積 (WIRE RANGE)	絶縁外径 (INSULATION DIA.)
10μ以下 : ±0.2	0.76	2.2-3.4 mmφ
10μ以上 30μ以下 : ±0.25	2.09 mm ² (AWG #18-#14)	
30μ以上 100μ以下 : ±0.3	材料 (MATERIAL)	仕上 (FINISH)
角 度 : ±3°	表参照 (SEE TABLE)	
C1	REVISED PER ECO-11-005294	RK
LTR	変更 (REVISION RECORD)	DR
DR.	30 JUN. '94	DE.
CHK.	4 JUL. '94	APP.
N. NAGASHIMA	M. SUZUKI	Y. KASHIWA
M. SHINDO		
名称 (NAME)	"250" SERIES POSITIVE LOCK-EX-II REC. "250" シリーズ・ポジティブロック-EX-II) セブタクル	

CUSTOMER DRAWING