

Feed-through header - GMSTB 2,5/10-G-7,62 BK AU - 1710029

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


PCB headers, nominal current: 12 A, rated voltage (III/2): 630 V, number of positions: 10, pitch: 7.62 mm, color: black, contact surface: Gold, mounting: Soldering



The figure shows a 10-position version of the product

Your advantages

- ✓ Maximum flexibility when it comes to device design – one header for connectors with different connection technologies
- ✓ Items that can be aligned in various pitches support flexible and space-saving PCB assembly
- ✓ Well-known mounting principle allows worldwide use
- ✓ Larger pitch for increased voltage requirements
- ✓ Plug-in direction parallel to the PCB

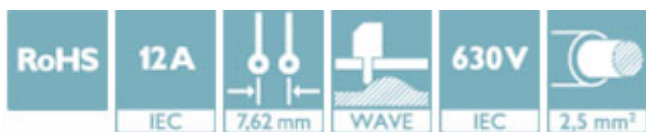

Key Commercial Data

Packing unit	50 pc
GTIN	
GTIN	4055626139630

Technical data

Dimensions

Pitch	7.62 mm
Length of the solder pin	3.5 mm
Pin dimensions	1 x 1 mm

General

Range of articles	GMSTB 2,5/..-G
Insulating material group	I
Rated voltage (III/2)	630 V
Nominal current I _N	12 A
Flammability rating according to UL 94	V0
Color	black

Feed-through header - GMSTB 2,5/10-G-7,62 BK AU - 1710029

Technical data

General

Number of positions	10
---------------------	----

Standards and Regulations

Flammability rating according to UL 94	V0
--	----

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Approvals


Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		B.01742
-----	---	---------

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>