

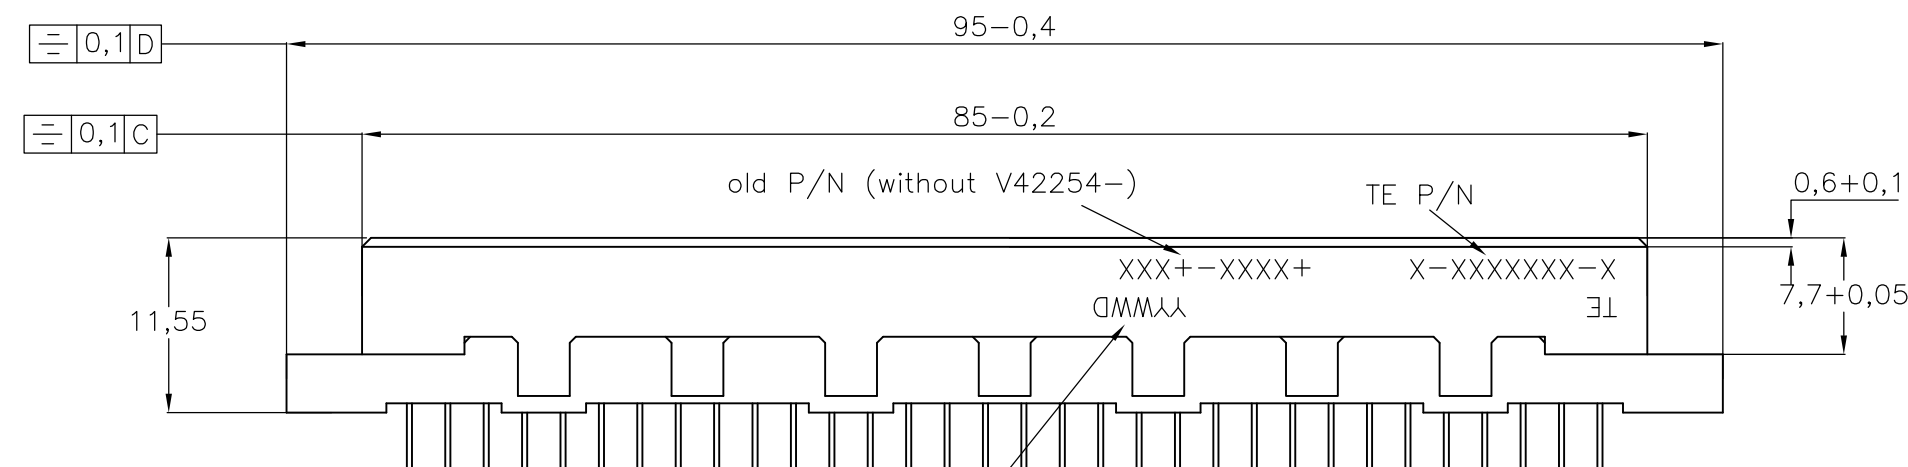
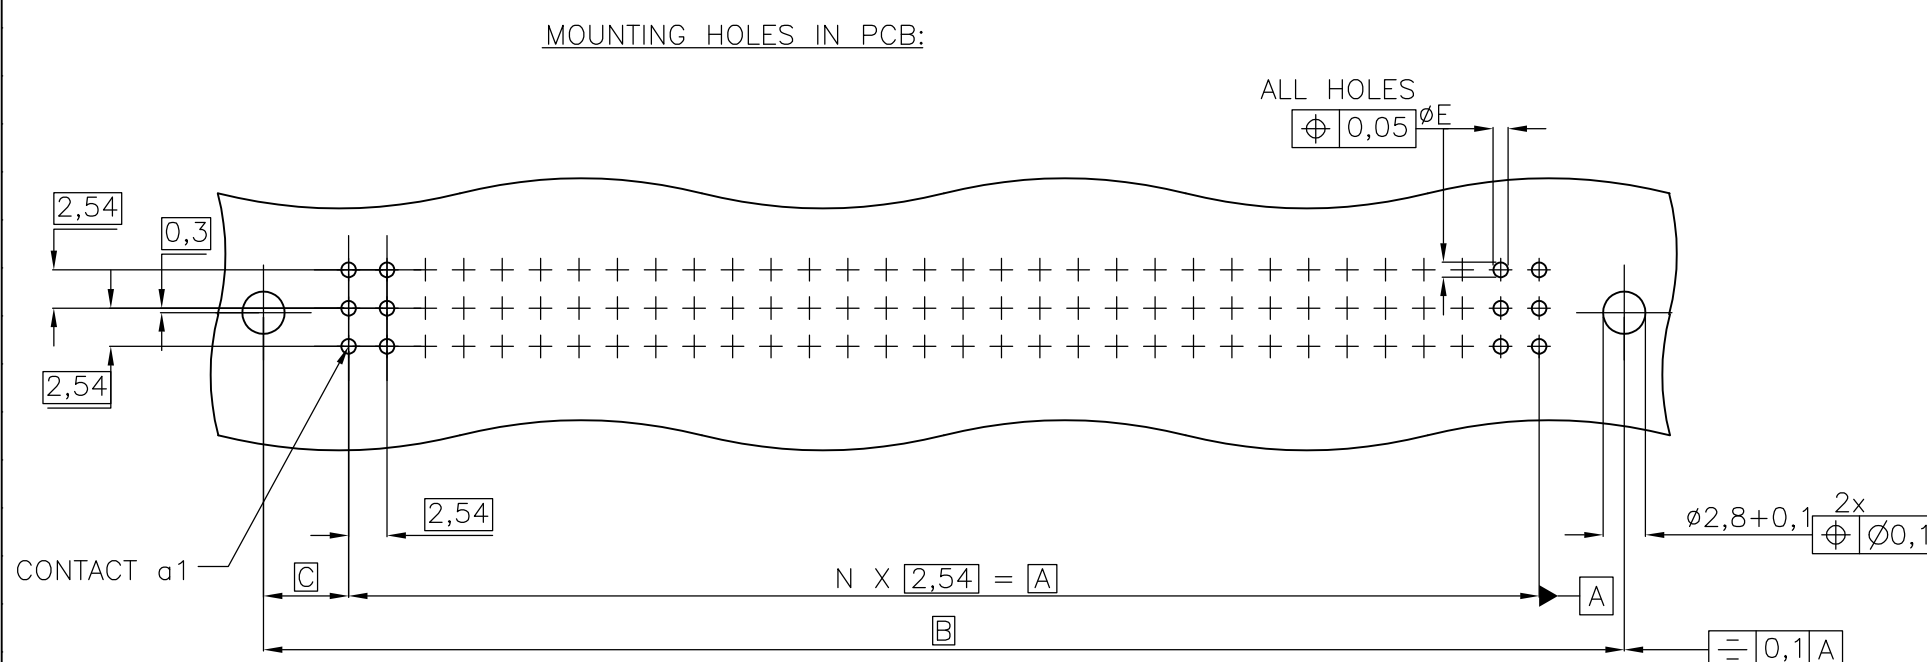
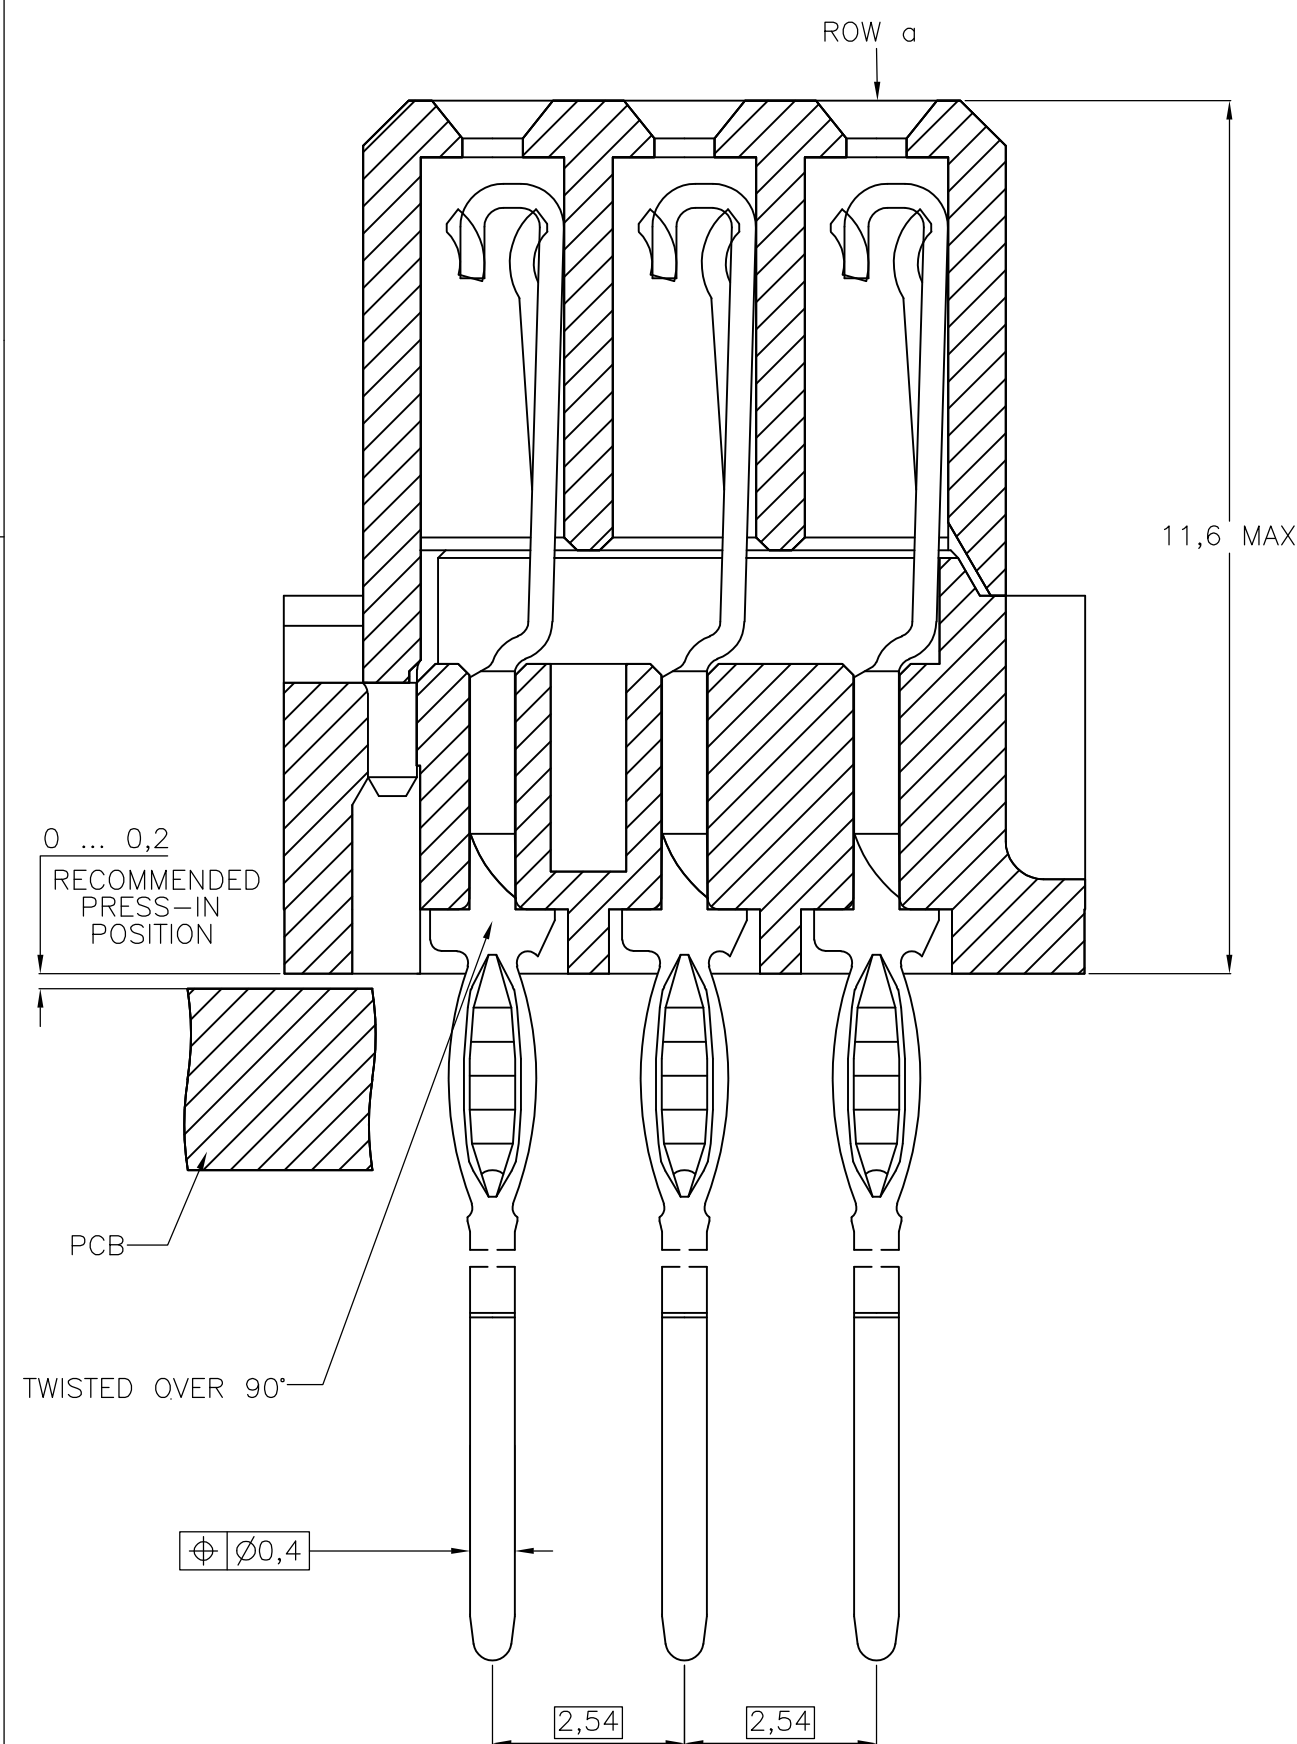
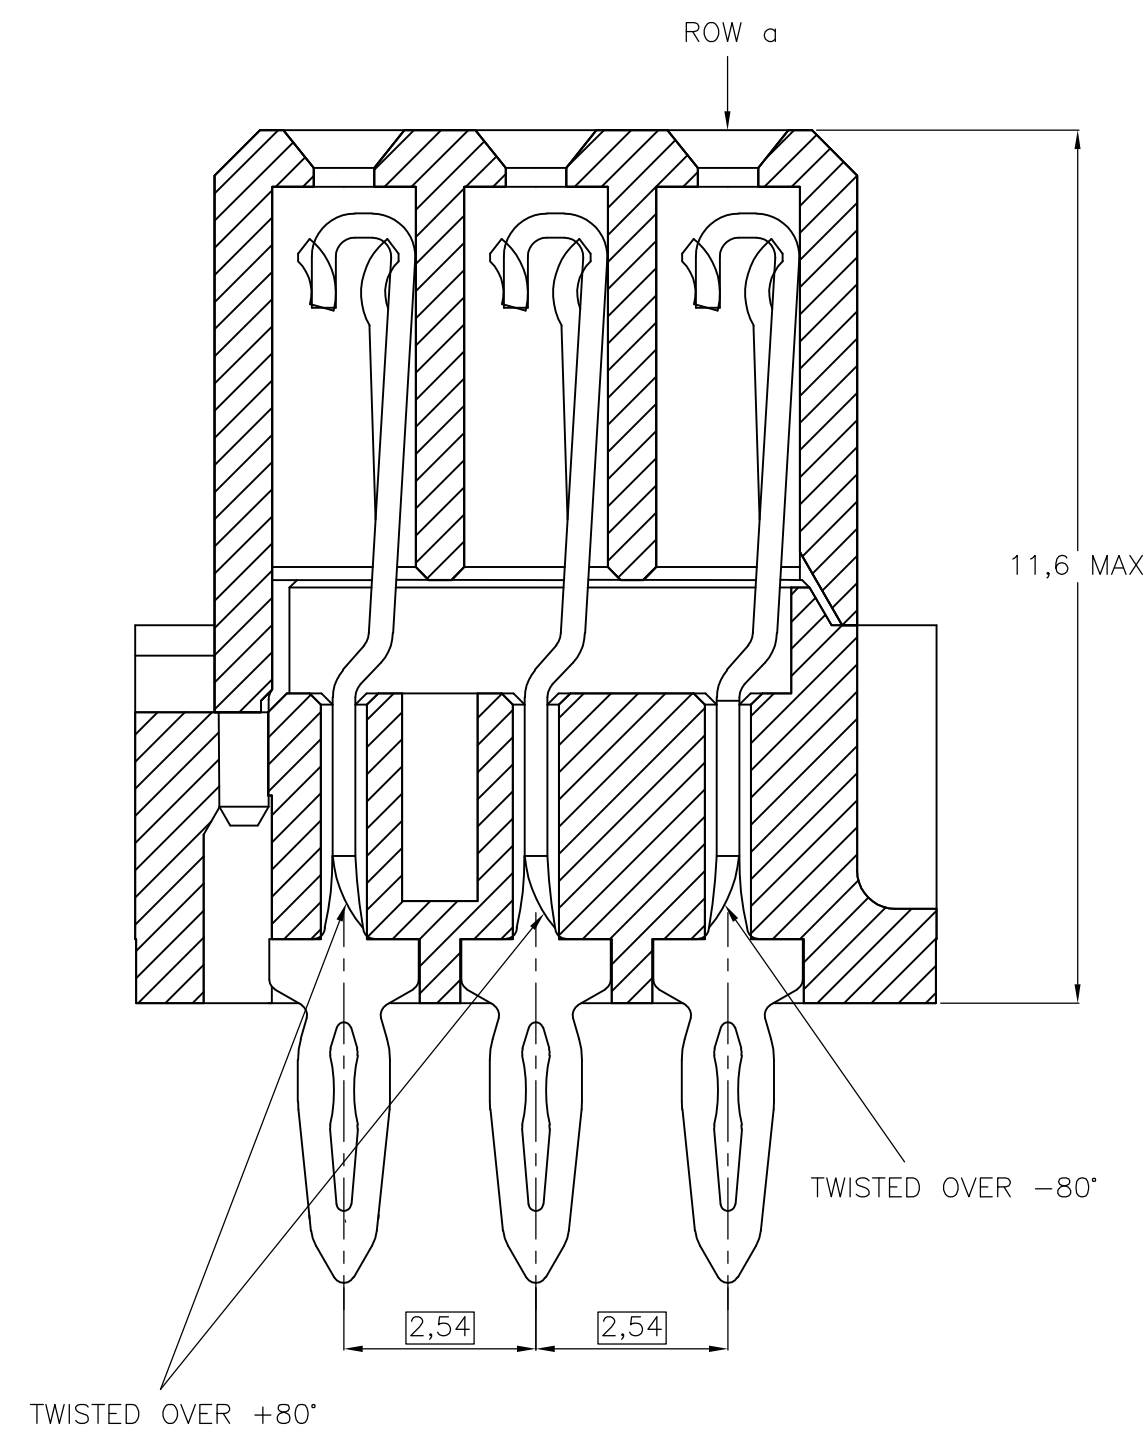
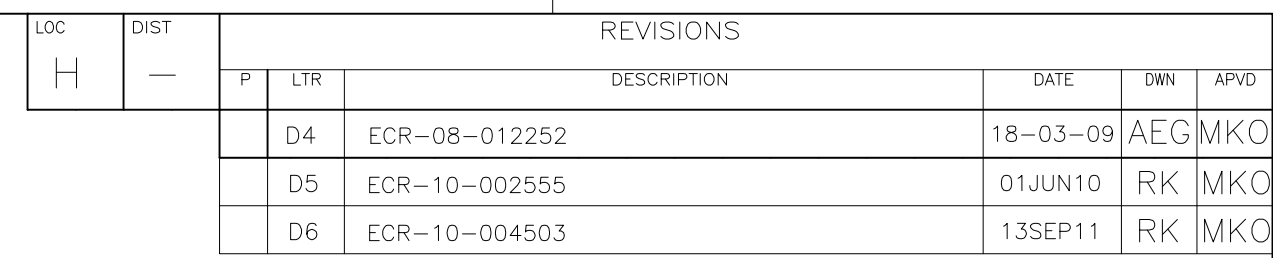
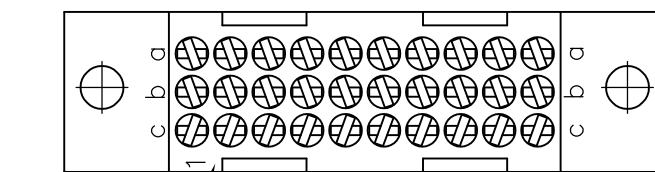
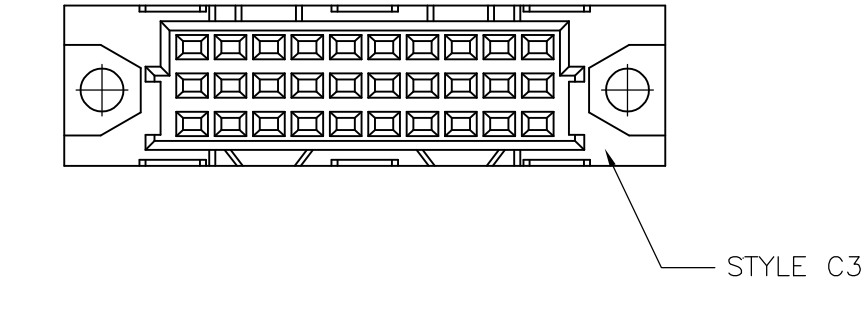
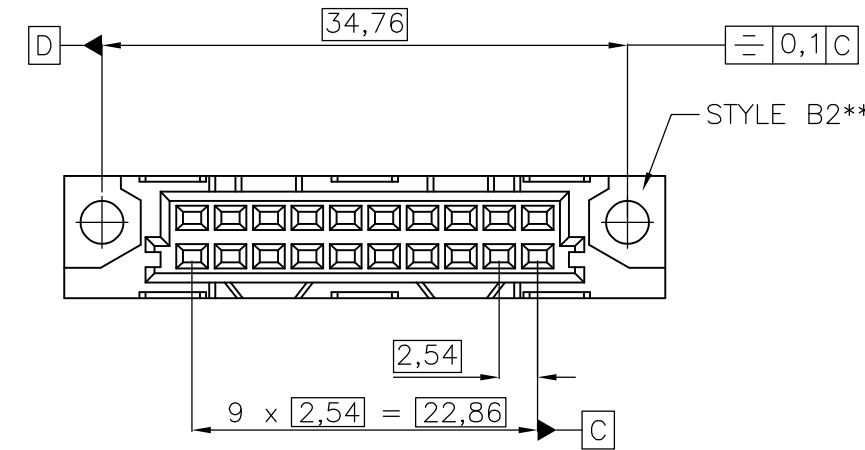
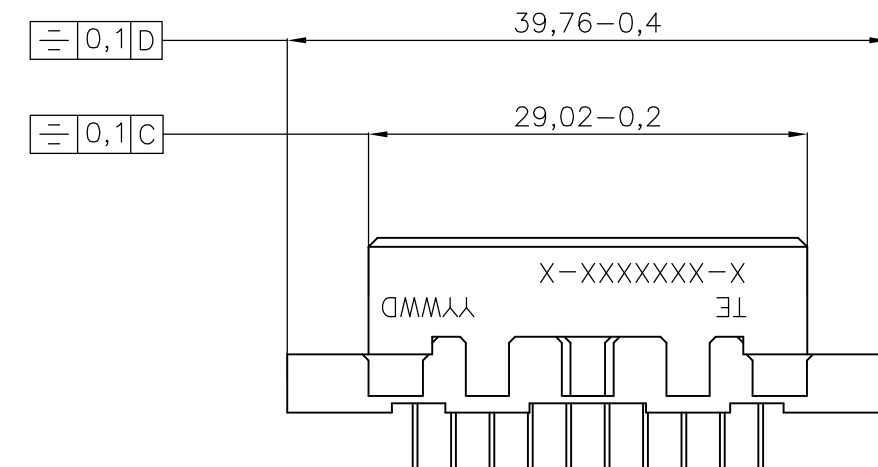
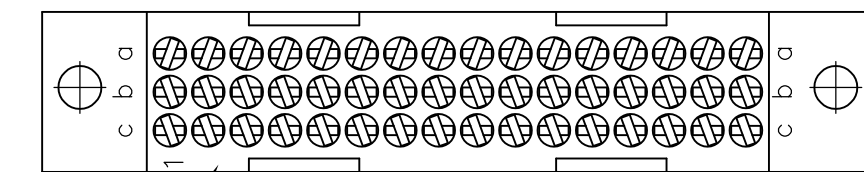
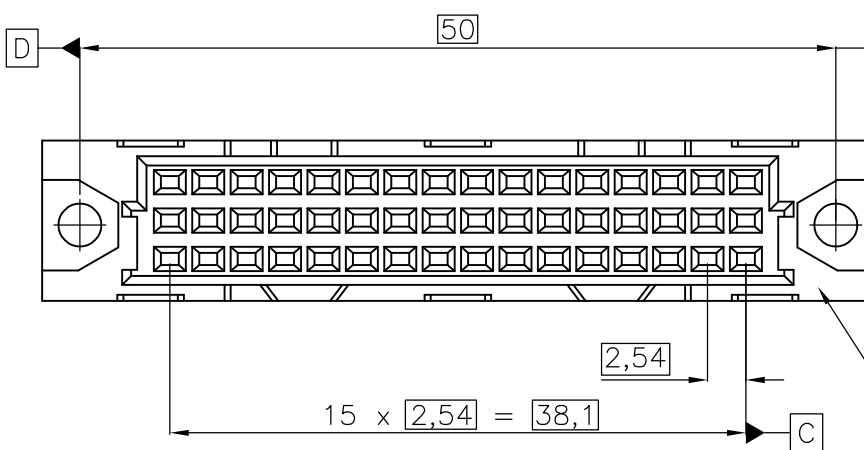
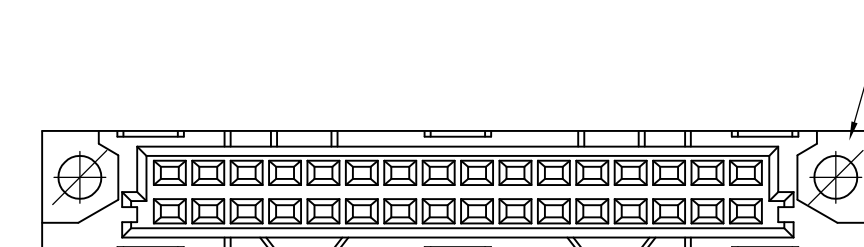
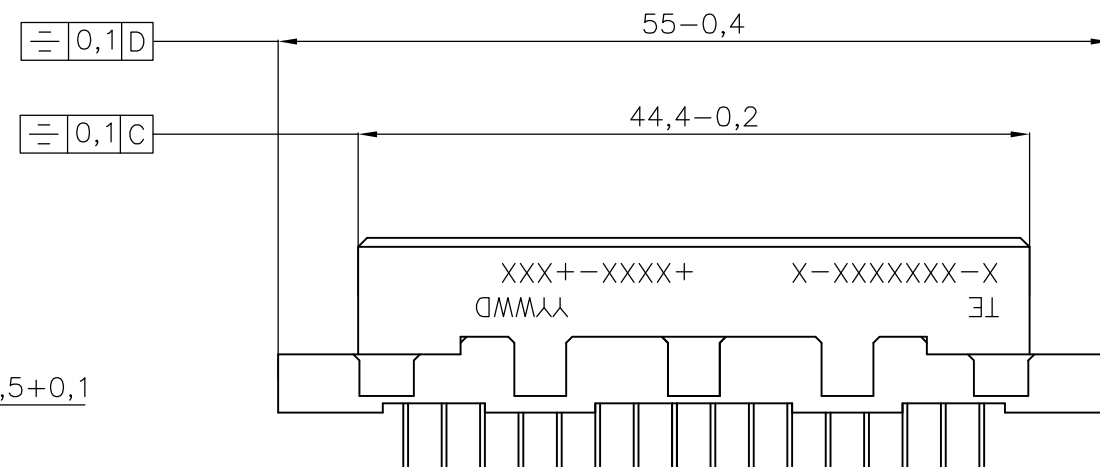
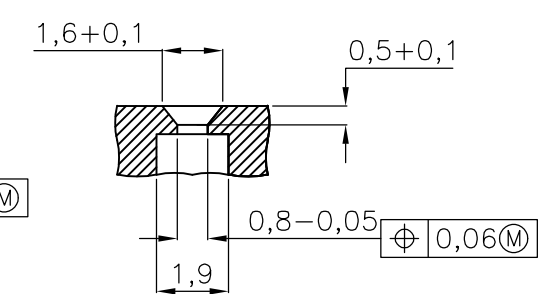


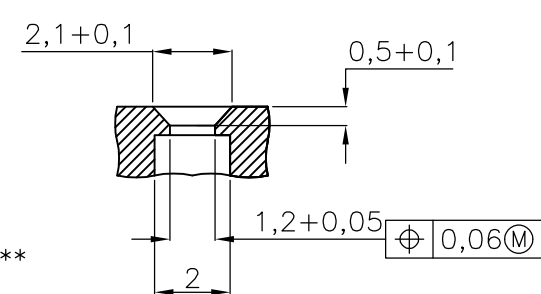

MANUFACTURING DATE CONSISTING OF: /
2 DIGITS FOR YEAR (YY), 2 DIGITS FOR WEEK (WW) AND 1 DIGIT FOR THE DAY (D)

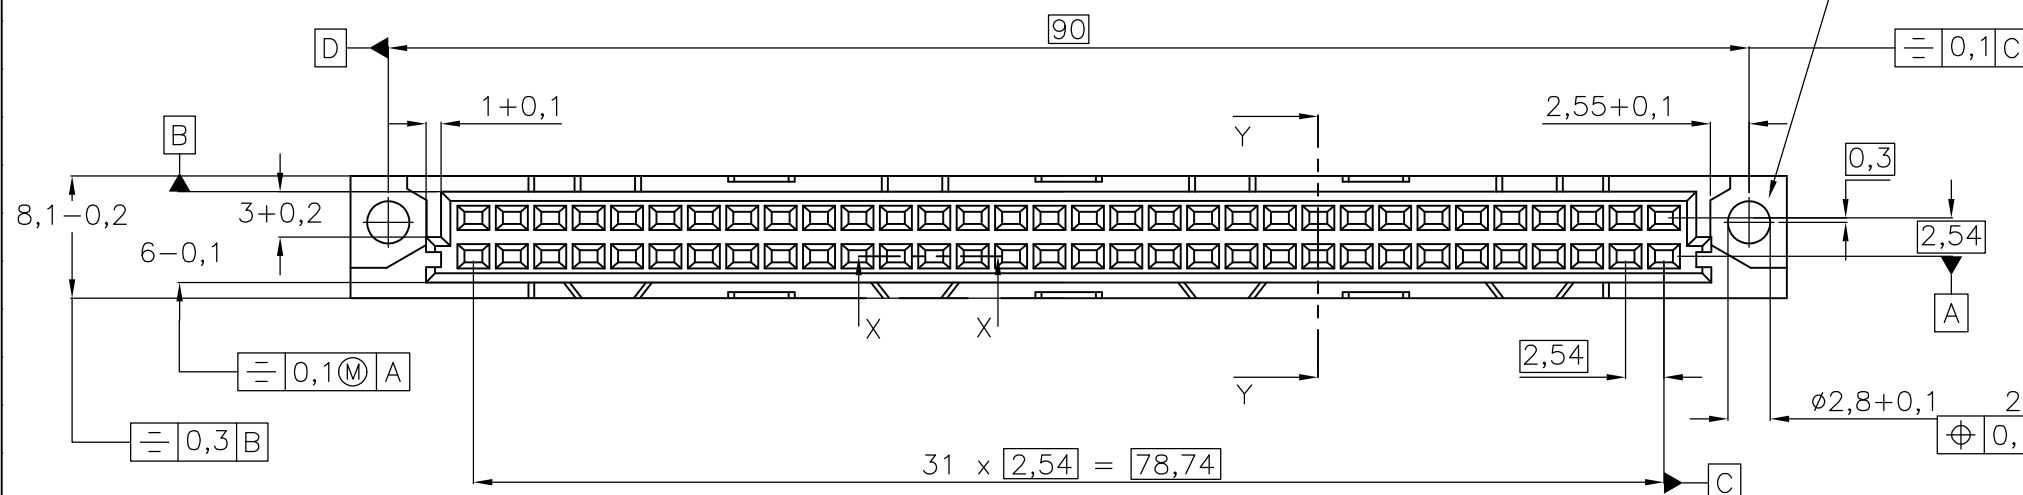

TYPE	N	A	B	C
B C	31	78,74	90	5,63
B/2 C/2	15	38,16	50	5,95
B/3 B/3	9	22,86	34,76	5,95

E	TERMINATION
0,94+0,15	PRESS FIT ¹⁾




1) PLATED-THROUGH HOLE :
 DRILLED HOLE = 1,15 mm
 CU MIN 25 μ m
 SnPb = 5...15 μ m



— MATERIAL: COPPER ALLOY

PERFORMANCE LEVEL ACC TO DIN41612 AND IEC 603-2	NOBLE METALS	CODE
CLASS I	PdNi + Au or Au	1 4
CLASS II	PdNi + Au or AU Au	2 5
CLASS III	PdNi + Au or AU	3



		L	CODE
	PRESSFIT	$3,7 \pm 0,3$ $6,0 \pm 0,3$	63 70
	PRESSFIT-WIRE-WRAP	$13 \pm 0,5$ $17 \pm 0,5$	60 61
	PRESSFIT-WW REAR PLUG UP	$13 \pm 0,5$ $17 \pm 0,5$	66 67



NICKEL UNDERLAYER
PROTECTION FILM : HF-GREASE

V 4 2 2 5 4 - P 2 x x x - C x x x

CODE FOR PERFORMANCE LEVEL

CODE FOR TERMINATION STYLE

STYLE, NO OF CONTACTS
AND CONTACT ASSIGNMENT
SEE SHEET 2

