


Rail Mount Terminal Blocks

NDNV4

SPECIFICATIONS:

Rating: NDNV4 30A, 600V; UL/CSA
Center Spacing: .250" (6.35mm)
Number Of Poles: 4
Circuits Per Foot: 48
Circuit Jumper: JN4, 4 circuits
Wire Range: AWG #10-22 CU
Screw Size: #6-32
Mounting Options: 35mm DIN rail, C-rail
Marking Tape: MTC6
Torque Rating: 18 in-lb
Operating Temperature: 105°C

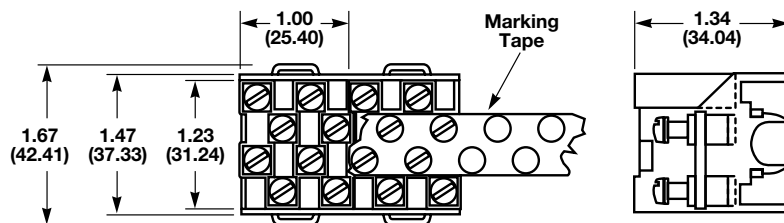

NDN3

SPECIFICATIONS:

Rating: 30A - field wiring; 40A - factory wiring
 600V; UL/CSA
Center Spacing: .300" (7.62 mm)
Number Of Poles: 3
Circuits Per Foot: 38
Circuit Jumper: JNDN3, 2 circuits
Wire Range: AWG #10-22 CU
Screw Size: #6-32
Mounting Options: 35mm DIN rail, C-rail
Marking Tape: MT12-1/2
Torque Rating: 18 in-lb
Operating Temperature: 105°C

