


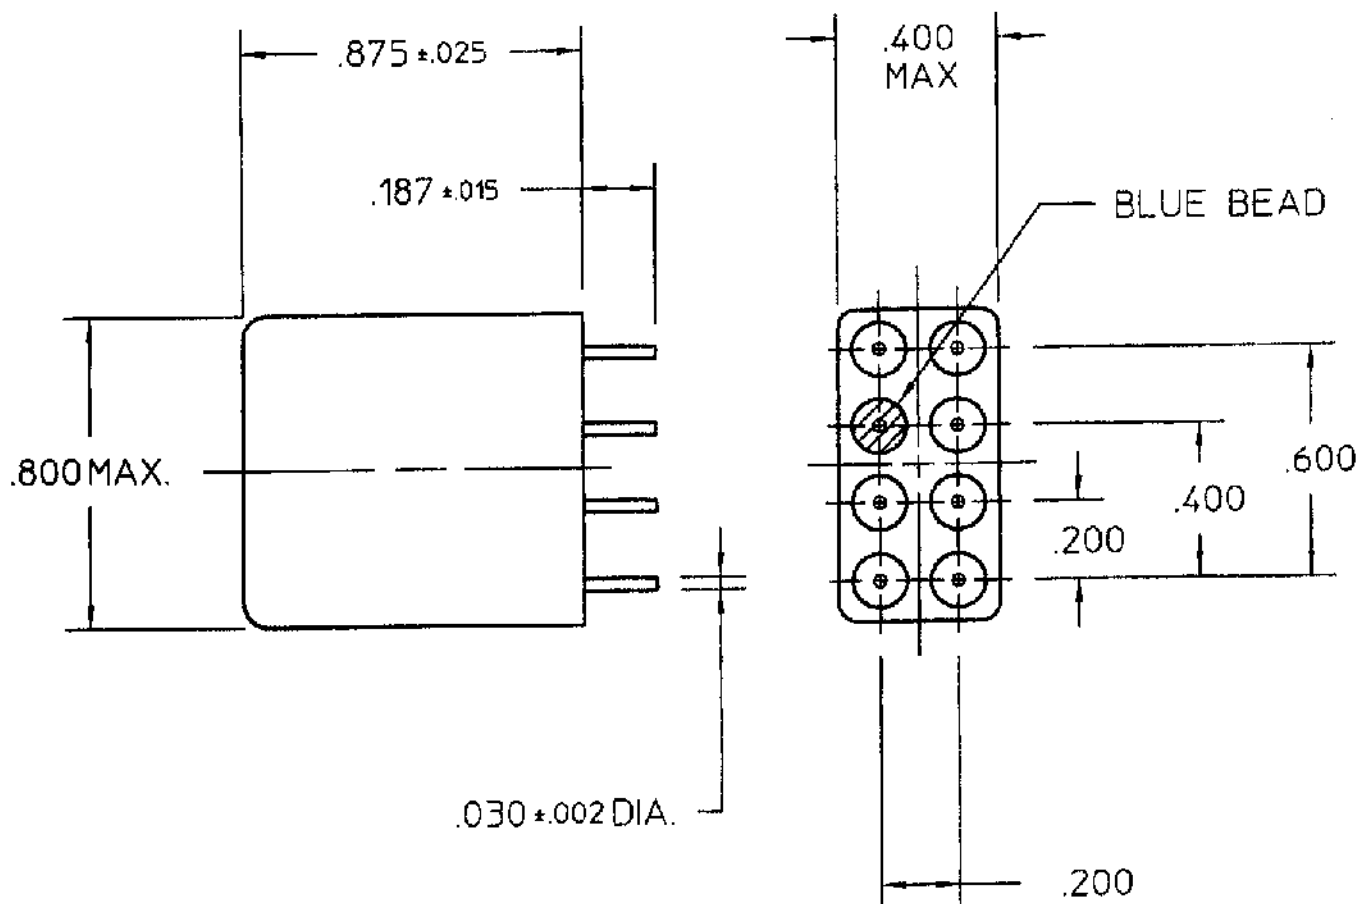

REV. 0

DCO 16554

COIL: @ 25°C

RESISTANCE 44 OHMS ±10%

NOMINAL VOLTAGE 6.0 VDC

MUST OPERATE 3.0 VDC

MUST RELEASE 2.1 VDC MAX., .21 MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's


SHOCK 100 g's 6 ± 1 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 6 MS MAX.

CONTACT BOUNCE 1 MS MAX.

CUSTOMER DATA SHEET

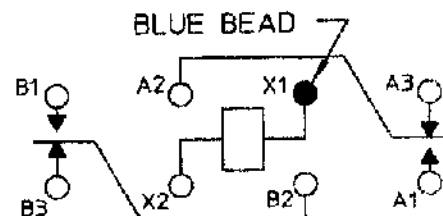

TERMINAL VIEW

CONTACT RATING: 2 AMPS 28 VDC RESISTIVE
100,000 OPERATIONS MINIMUM

DR. PBB 10/13/00

CK. TLG 10-16-00

CH Technologies™
 advanced control electronic solutions

CUST. OPL

CUST. NO. M5757/10-059

REV.

"FW" RELAY

FW1201S07