


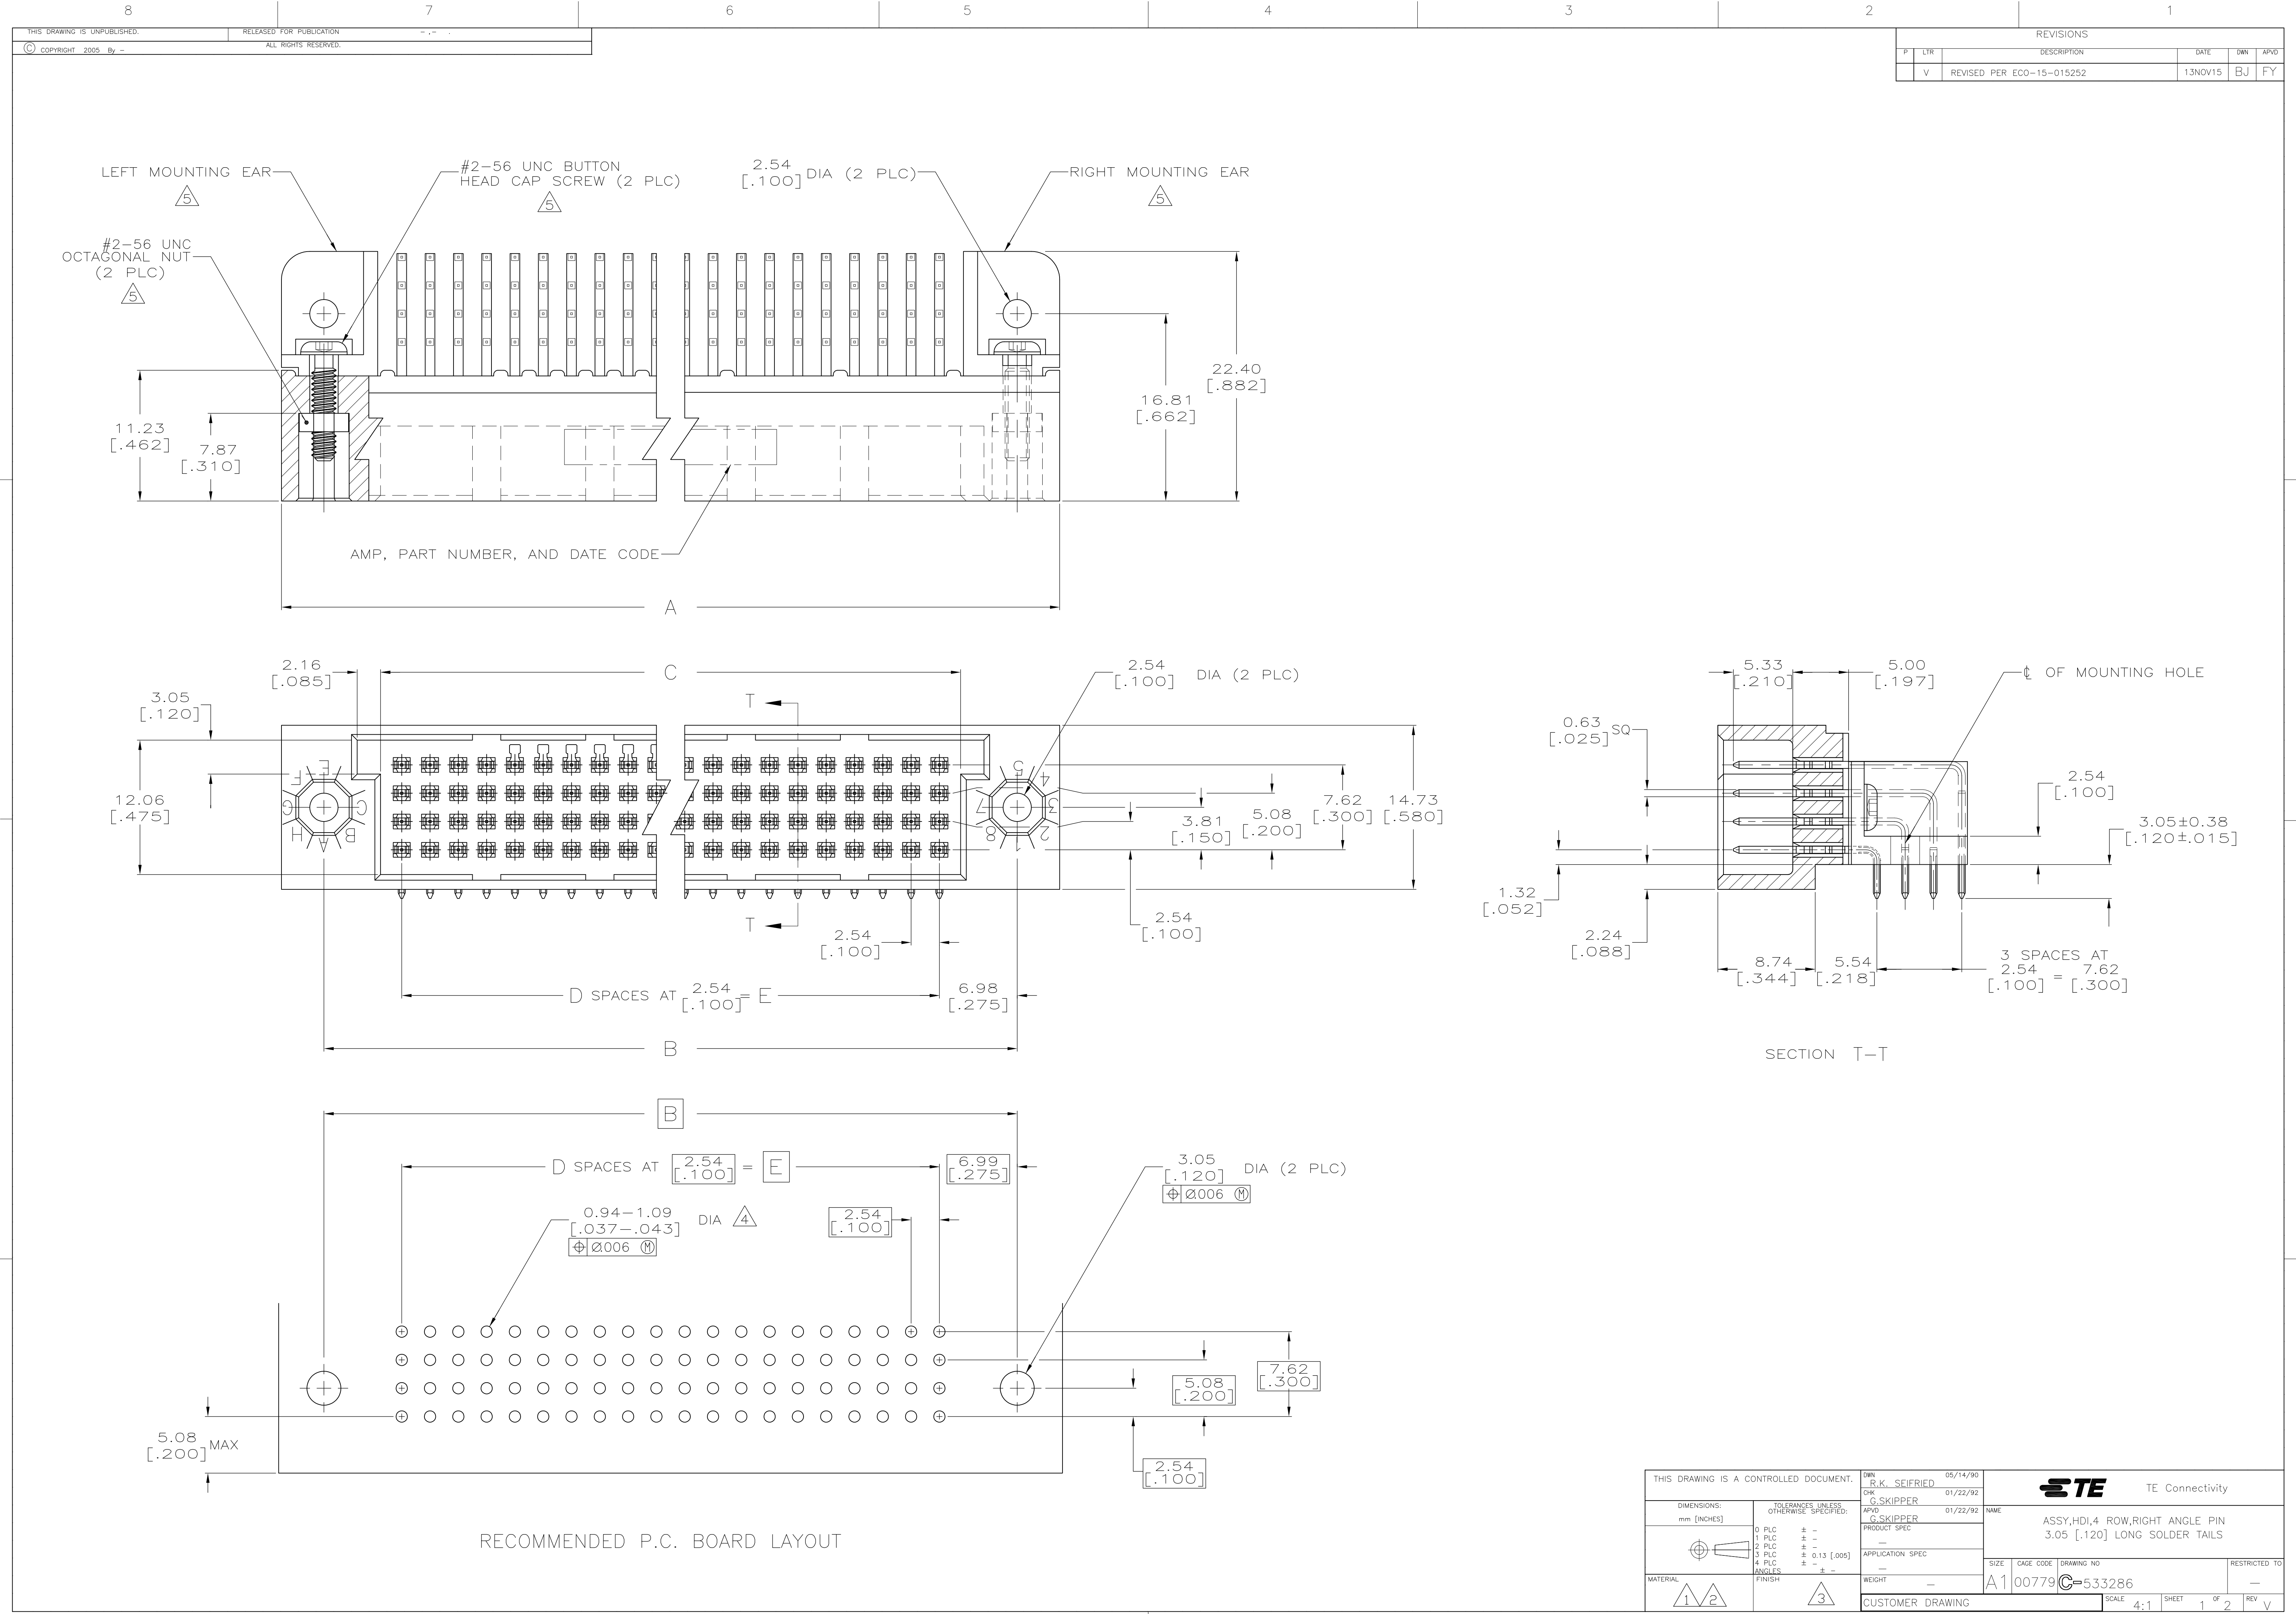

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
V		REVISED PER ECO-15-015252	13NOV15	BJ	FY

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.K. SEIFRIED CHK G.SKIPPER APVD G.SKIPPER PRODUCT SPEC	05/14/90 01/22/92 01/22/92	NAME ASSY, HDI, 4 ROW, RIGHT ANGLE PIN 3.05 [.120] LONG SOLDER TAILS	
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.13 [.005] 4 PLC ± - ANGLES ± -	APPLICATION SPEC	SIZE A1	CAGE CODE 00779
MATERIAL 1/2	FINISH 3	WEIGHT -	DRAWING NO. 533286	RESTRICTED TO -	CUSTOMER DRAWING
SCALE 4:1		SHEET 1 OF 2		REV V	

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
-		SEE SHEET 1	-	-	-

1

HOUSING MATERIAL: THERMOPLASTIC, COLOR=BLACK.

2

CONTACT MATERIAL: PHOSPHOR BRONZE.

3

FINISH:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-9063; BASED ON TELCORDIA DR-1217-CORE APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
SOLDER TAILS AREA: TIN-LEAD PLATED.

4

RIGHT ANGLE PIN RECOMMENDED P.C. BOARD HOLE SIZES ARE 0.94-1.09 [.037-.043]; RECOMMENDED PAD DIA IS 1.52 [.060].

5

MOUNTING EARS AND HARDWARE PURCHASED SEPARATELY, KIT PART NUMBER 533050-1.

6.

DIMENSIONS IN BRACKETS ARE IN INCHES.

7

HOUSINGS WITH CENTER MOUNTING IS RECOMMENDED FOR ASSEMBLIES HAVING 75 CONTACTS PER ROW OR MORE.

8

PART NUMBER IS OBSOLETE.

9

OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

8

144.78
[5.700]

-57-

148.59
[5.850]

158.75
[6.250]

166.37
[6.550]

-232

3-533286-5

8

134.62
[5.300]

-53-

138.43
[5.450]

148.59
[5.850]

156.21
[6.150]

-216

3-533286-4

-

-

-

-

-

-

3-533286-3

-

-

-

-

-

-

3-533286-2

-

-

-

-

-

-

3-533286-1

-

-

-

-

-

-

3-533286-0

-

-

-

-

-

-

2-533286-9

-

-

-

-

-

-

2-533286-8

-

-

-

-

-

-

2-533286-7

-

-

-

-

-

-

2-533286-6

-

-

-

-

-

-

2-533286-5

-

-

-

-

-

-

2-533286-4

-

-

-

-

-

-

2-533286-3

-

-

-

-

-

-

2-533286-2

-

-

-

-

-

-

2-533286-1

-

-

-

-

-

-

2-533286-0

-

-

-

-

-

-

1-533286-9

-

-

-

-

-

-

1-533286-8

OBSOLETE

-

-

-

-

-

-

1-533286-7

-

-

-

-

-

-

1-533286-6

8

93.98
[3.700]

-37-

97.79
[3.850]

107.95
[4.250]

115.57
[4.550]

+52

1-533286-5

8

210.82
[8.300]

-83-

214.63
[8.450]

224.79
[8.850]

232.41
[9.150]

-336

1-533286-4

8

200.66
[7.900]

-79-

204.47
[8.050]

214.63
[8.450]

222.25
[8.750]

-320

1-533286-3

9

187.96
[7.400]

74

191.77
[7.550]

201.93
[7.950]

209.55
[8.250]

300

1-533286-2

8

175.26
[6.900]

-69-

179.07
[7.050]

189.23
[7.450]

196.85
[7.750]

-280

1-533286-1

8

162.56
[6.400]

-64-

166.37
[6.550]

176.53
[6.950]

184.15
[7.250]

-260

1-533286-0

8

149.86
[5.900]

59

153.67
[6.050]

163.83
[6.450]

171.45
[6.750]

240

533286-9

8

137.16
[5.400]

-54-

140.97
[5.550]

151.13
[5.950]

158.75
[6.250]

-220

533286-8

8

124.46
[4.900]

-49-

128.27
[5.050]

138.43
[5.450]

146.05
[5.750]

-200

533286-7

111.76
[4.400]

44

115.57
[4.550]

125.73
[4.950]

133.35
[5.250]

180

533286-6

99.06
[3.900]

39

102.87
[4.050]

113.03
[4.450]

120.65
[4.750]

160

533286-5

8

86.36
[3.400]

-34-

90.17
[3.550]

100.33
[3.950]

107.95
[4.250]

+40

533286-4

78.74
[3.100]

31

82.55
[3.250]

92.71
[3.650]

100.33
[3.950]

128

533286-3

73.66
[2.900]

29

77.47
[3.050]

87.63
[3.450]

95.25
[3.750]

120

533286-2

60.96
[2.400]

24

64.77
[2.550]

74.93
[2.950]

82.55
[3.250]

100

533286-1

E

D

C

B

A

POSN

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

0 PLC
1 PLC
2 PLC
3 PLC
4 PLC
ANGLES

± -
± -
± -
± 0.13 [.005]
± -

MATERIAL

05/14/90

R. K. SEIFRIED

01/22/92

G. SKIPPER

01/22/92

G. SKIPPER

PRODUCT SPEC

APPLICATION SPEC

WEIGHT 0

TE Connectivity

ASSY, HDI, 4 ROW, RIGHT ANGLE PIN 3.05 [.120] LONG SOLDER TAILS

SIZE CAGE CODE DRAWING NO RESTRICTED TO

00779

533286

CUSTOMER DRAWING

SCALE 4:1

SHEET 2 OF 2

REV V

4805 (1/15)