



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REV PER ECO 17-015175	11OCT2017	CT	MOC

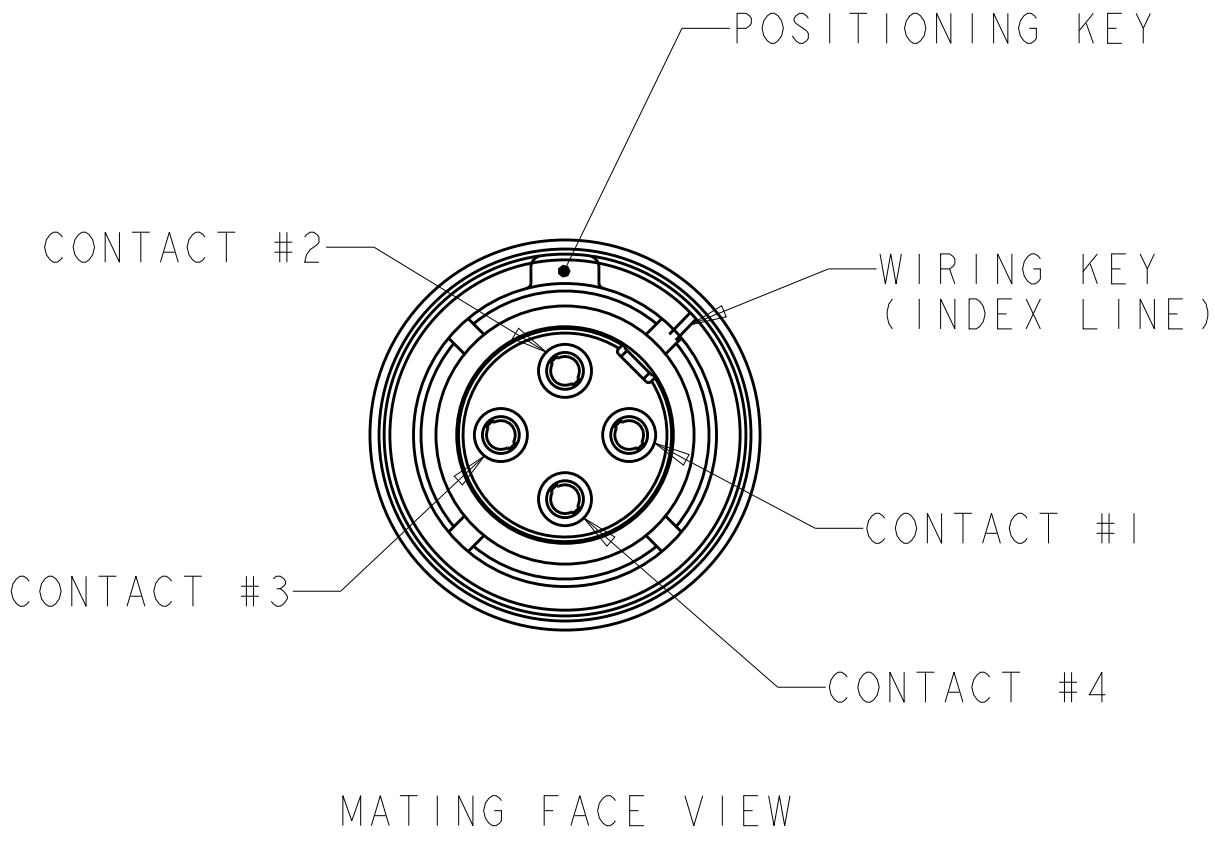

CONTACT CAVITY NUMBERING
STANDARD CAVITY NUMBER ASSIGNMENT

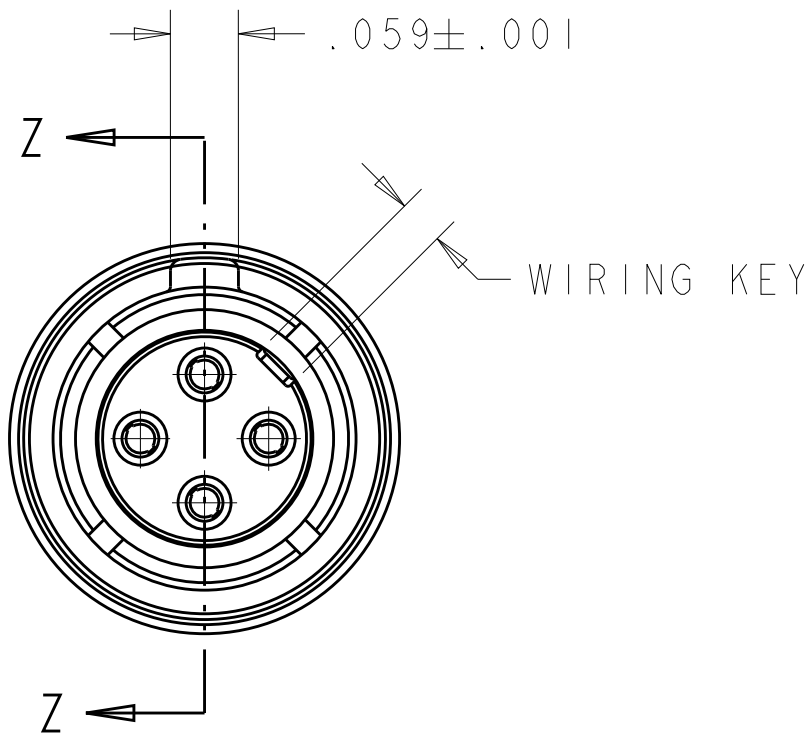

1. COMPONENTS ARE PACKAGED IN KIT FORM. CABLE MUST BE PURCHASED SEPARATELY.
2. ASSEMBLY PER APPLICATION SPECIFICATION 114-13123.
3. USE INSERTION-EXTRACTION TOOL 1738894-1.

SHELL, OUTER; QTY-1
MATERIAL; BERYLLIUM COPPER
FINISH; GOLD OVER NICKEL


INSERT, SOCKET; QTY-1
MATERIAL; THERMOPLASTIC, COLOR-WHITE

CONTACT, SOCKET; QTY-4
MATERIAL; BERYLLIUM COPPER
FINISH; GOLD OVER NICKEL

FERRULE; QTY-1
MATERIAL; BRASS
FINISH; GOLD OVER NICKEL

CABLE, QUADRAX, NOT INCLUDED
SHOWN FOR REFERENCE ONLY

ASSEMBLY, SEAL; QTY-1
MATERIAL; SLEEVE, SEALING; THERMOPLASTIC, COLOR; NATURAL
SEAL BOOT; SILICONE RUBBER, COLOR; BLUE

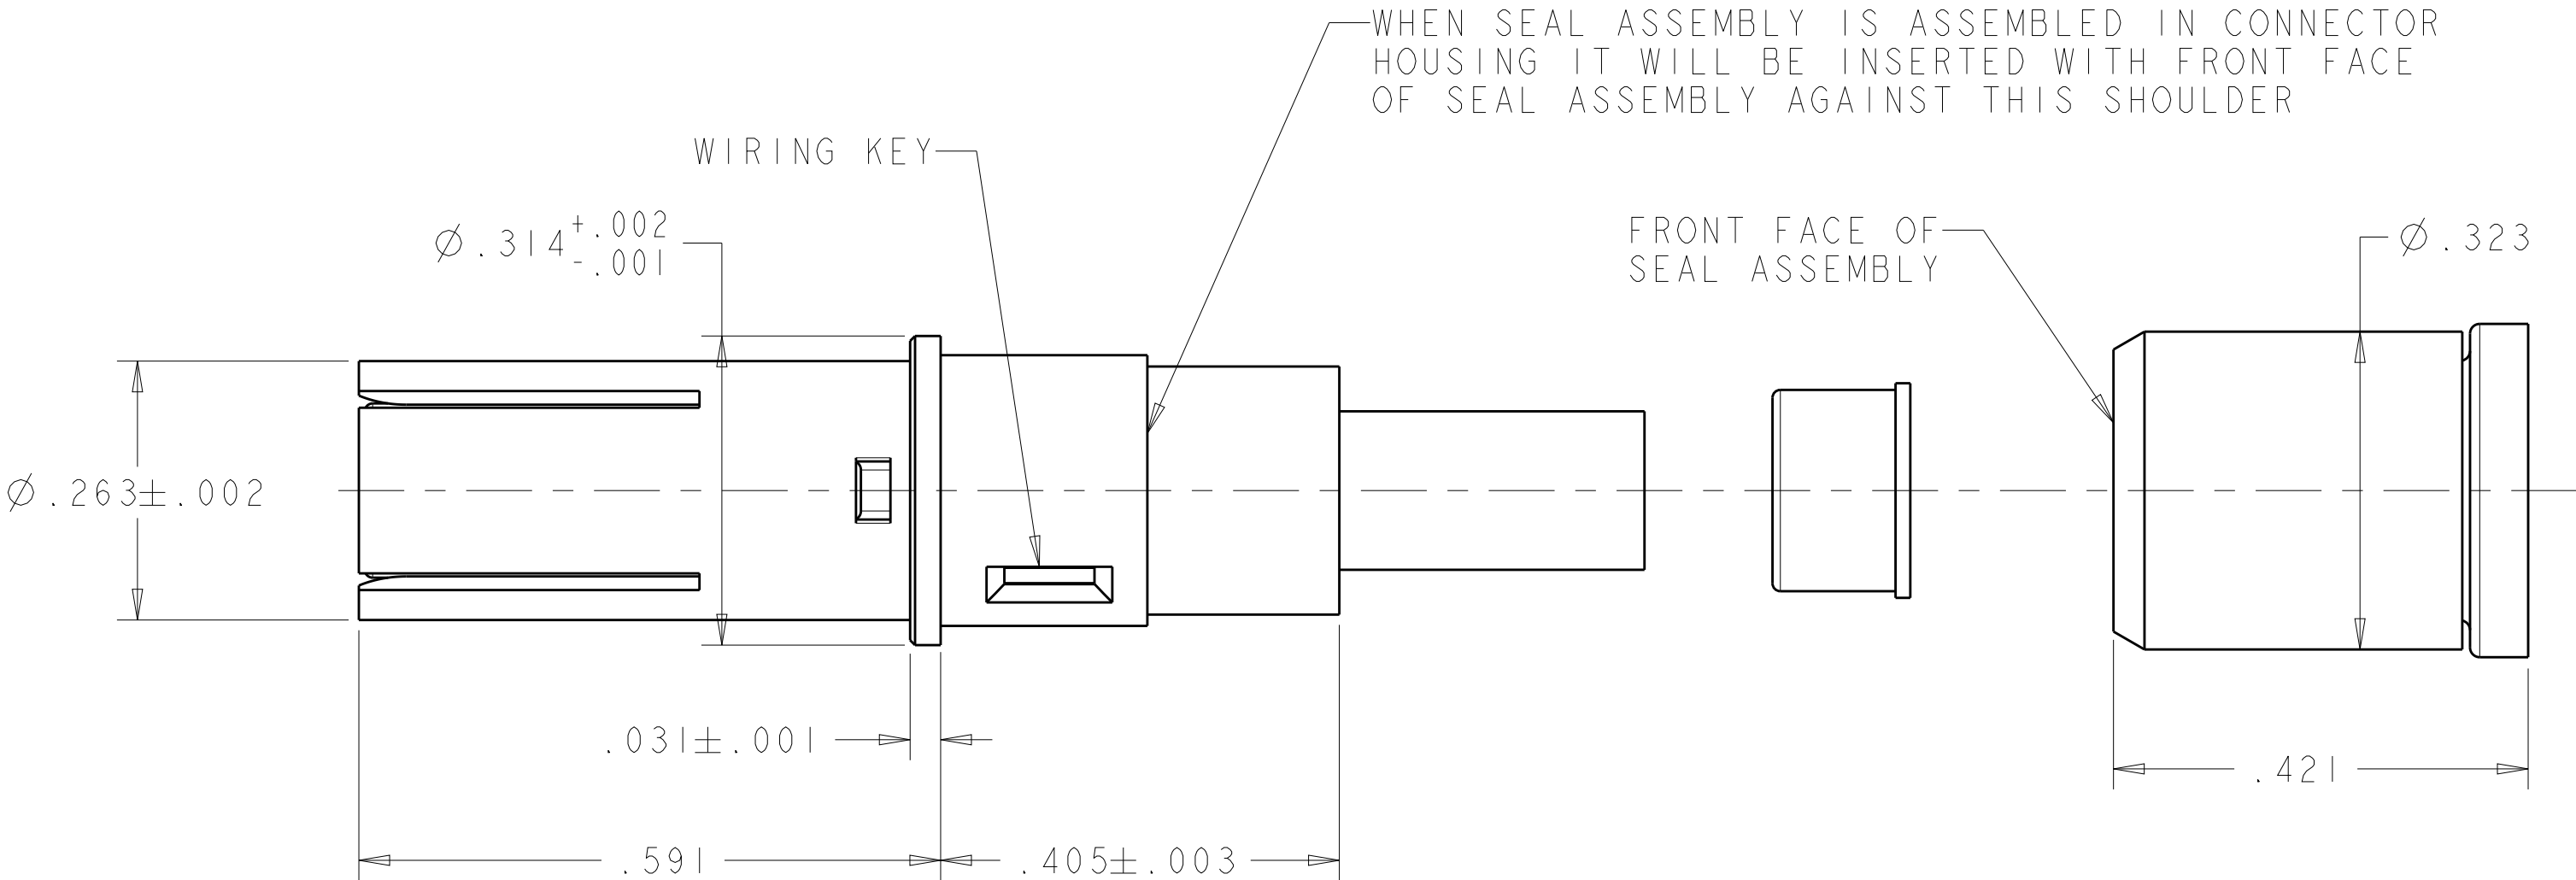

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R FLAIG	26AUG2007	TE Connectivity	
DIMENSIONS:		CHK K DOWHOWER	26AUG2007		
INCHES		APVD K DOWHOWER	26AUG2007	NAME ASSEMBLY, SOCKET, QUADRAX,	
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		SIZE A100779	
		0 PLC ±.005 1 PLC ±.005 2 PLC ±.005 3 PLC ±.005 4 PLC ±.005 ANGLES ±.005 FINISH		CAGE CODE C=2000032	
MATERIAL		WEIGHT		RESTRICTED TO	
-		-		-	
-		CUSTOMER DRAWING		SCALE 6:1	
				SHEET 1 OF 1	
				REV B	