
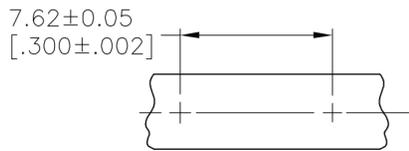
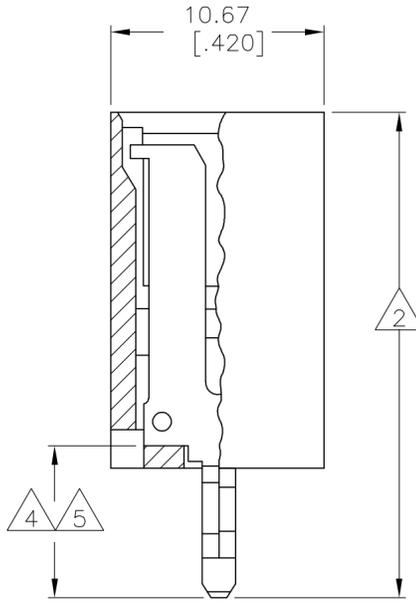
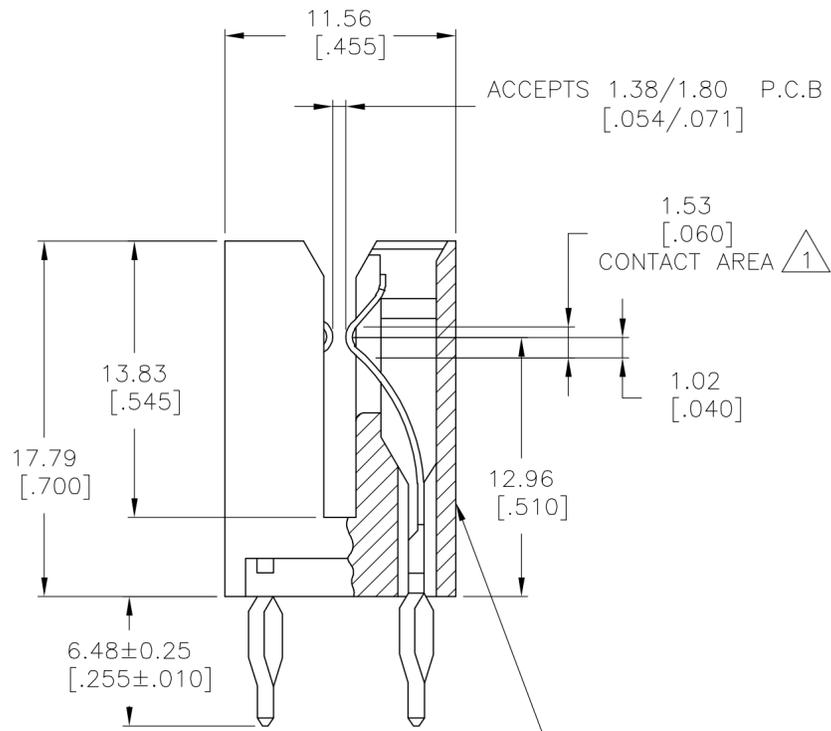


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	14	F	REVISED PER EC 063C-0205-05	09MAR06	GS MM



STAMPED P/N & DATE CODE

- $\triangle 1$ GOLD PL. .000050 MIN. THK. (CONTACT AREA FRONT FACE ONLY)
- $\triangle 2$ NICKEL PL. .000050 MIN. THK. ALL OVER
- 3. ACTION PIN MOUNTING HOLES - .076/.080 DIA. IN COPPER OR ALUMINIUM BUS BAR.
- $\triangle 4$ SOLDER PL. .000100 MIN. THK. POST AREA.
- $\triangle 5$ MATTE TIN PL. .000100 MIN. THK. POST AREA.

$\triangle 5$	AS SHOWN	5-119341-1
$\triangle 4$	AS SHOWN	119341-1
	REMARKS	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	-	tyco Electronics		Tyco Electronics Corporation	
DIMENSIONS: mm [INCHES]		CHK	-			Harrisburg, Pa 17105-3608	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	-	NAME			
0 PLC ± -		PRODUCT SPEC		GROUND MODULE			
1 PLC ± -		APPLICATION SPEC		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
2 PLC ± -		-		A2	00779	C=119341	-
3 PLC ± .005		-		CUSTOMER DRAWING			
4 PLC ± -		-		SCALE	SHEET	OF	REV
ANGLES ± 5°		WEIGHT		4:1	1	1	F
MATERIAL: CONTACT: 195 CA 3/4 HARD HOUSING: GLASS REINFORCED THERMOPLASTIC		FINISH: CONTACT: NICKEL PL. PER QQ-N-290 GOLD PL. PER MIL-G-45204 HOUSING COLOR- BLACK					