


MATERIALS AND FINISHES

MMCX PLUG: SEE SD-73415-387

BNC JACK: SEE SD-73171-165

CABLE: BELDEN 1671A

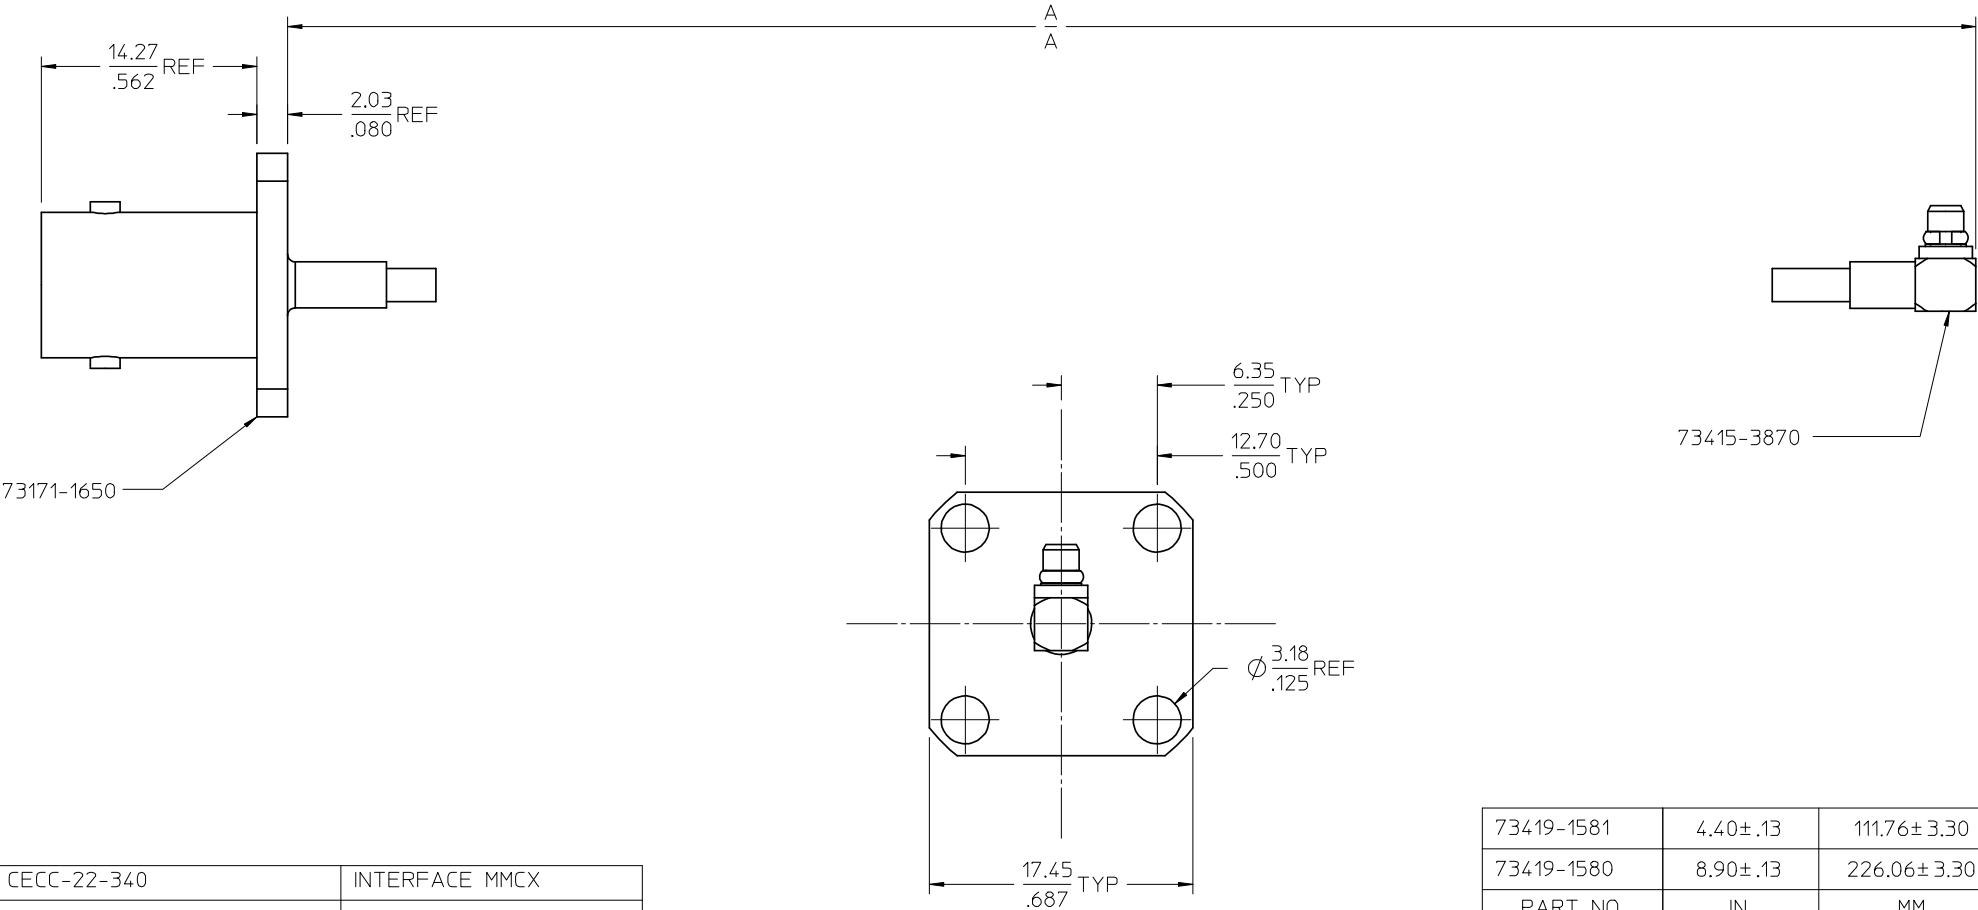

CECC-22-340	INTERFACE MMCX
MIL-STD-348A, FIG. 301.2	INTERFACE BNC JACK
SPECIFICATION	DESCRIPTION

73419-1581	4.40±.13	111.76±3.30
73419-1580	8.90±.13	226.06±3.30
PART NO.	IN	MM
A		

CHG: REDREW IN SD AND LOADED INTO WM. EC NO: URF2008-0640 DRAWN: ROBERTSON 2008/06/20 CHKD: SSS 2008/06/20 APPR: JWIENER 2008/06/20 REV				QUALITY SYMBOLS ▽=0 ▽=0		GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± --- ANGULAR ± 2 °		DIMENSION STYLE MM/IN DRAWN BY DATE TEF 2001/10/22 CHECKED BY DATE SSS 2001/10/22 APPROVED BY DATE GMH 2001/10/22		SCALE DESIGN UNITS METRIC		THIRD ANGLE PROJECTION	
										TITLE BNC J 4H FLANGE MOUNT TO MMCX P RA BELDEN 1671A CA-BNC/MMCX		MOLEX INCORPORATED	
A1				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
						SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SD-73419-158		1 OF 1	