
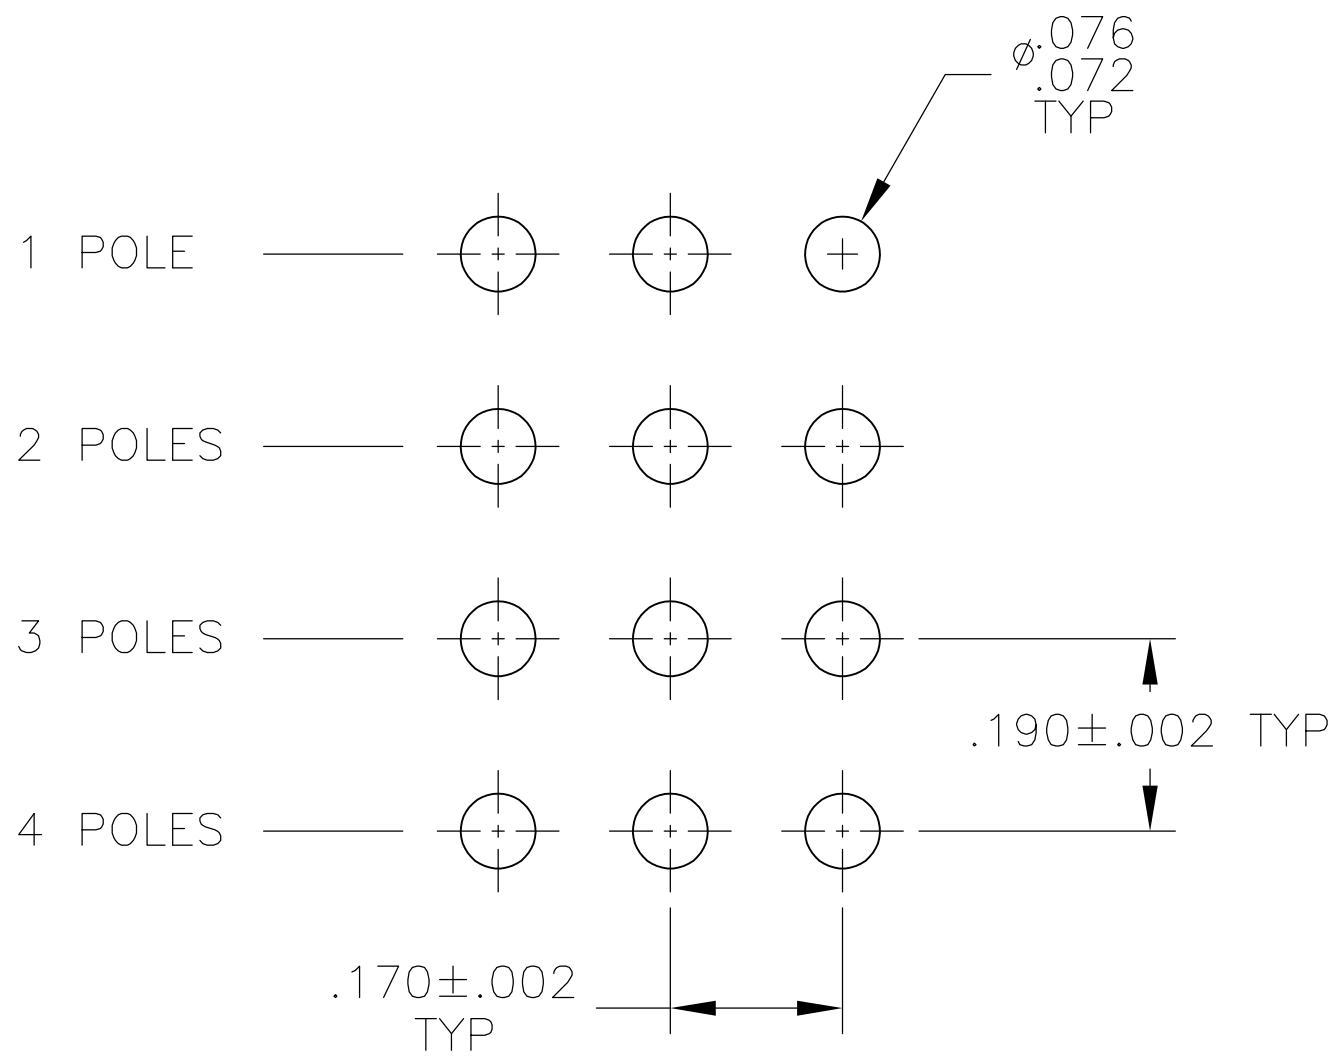


SPECIFICATIONS — SEE NOTE 3			
CURRENT RATING UL & CSA	6A @ 125 VAC (RESISTIVE)		
	3A @ 250 VAC (RESISTIVE)		
	4A @ 28 VDC (RESISTIVE)		
INITIAL CONTACT RESISTANCE	10 MILLIOHMS MAX @ 2–4 VDC, 1A		
DIELECTRIC STRENGTH	1,500 MEGOHMS MIN.		
WITHSTANDING VOLTAGE	1,000 VAC		
TRAVEL	.140		
ACTUATION FORCE	.4 to 2 kgf		
OPERATING TEMPERATURE	–20C TO +85C		
STORAGE TEMPERATURE	–40C TO +85C		
CONTACT TIMING	BREAK BEFORE MAKE		
TERMINAL SEAL	OVER MOLDED		
DURABILITY	PARAMETER	PUSH ON/ PUSH OFF	MOMENTARY
	250 VAC (3A RESISTIVE)	50,000	50,000
	125 VAC (6A RESISTIVE)	50,000	50,000
	28 VDC (4A RESISTIVE)	50,000	50,000




- 9 LASER MARKING USED FOR PARTS

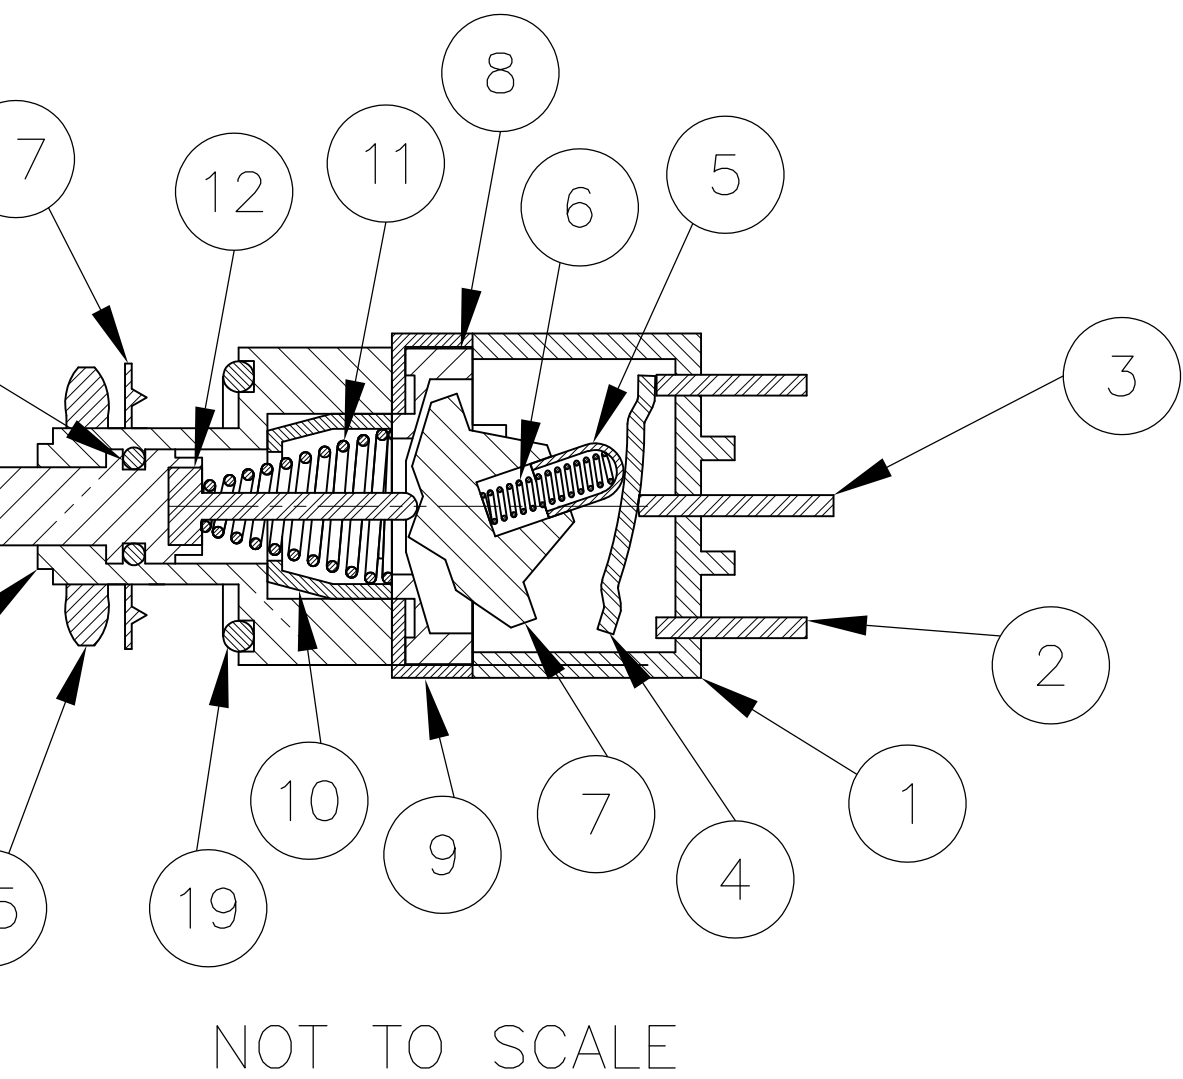

PC BOARD LAYOUT
PC TERMINALS ONLY


4805 (3/11)

LOC		DIST		REVISIONS					
AD		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
					—	SEE SHEET 1	—	—	—

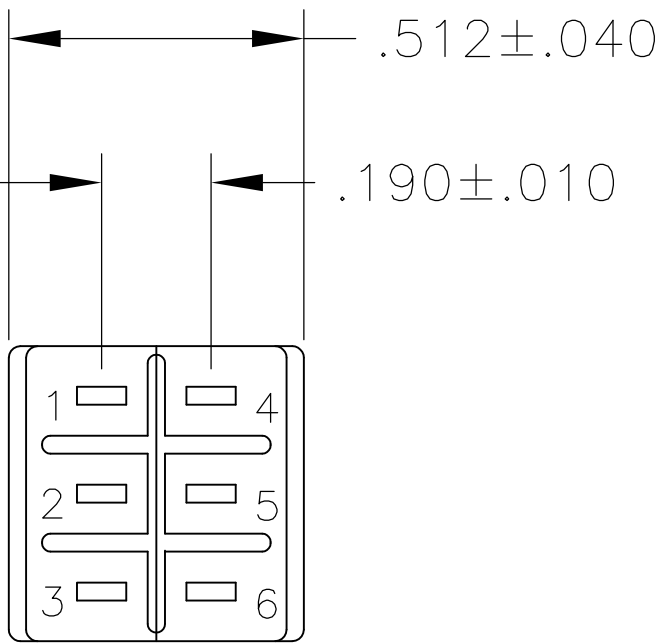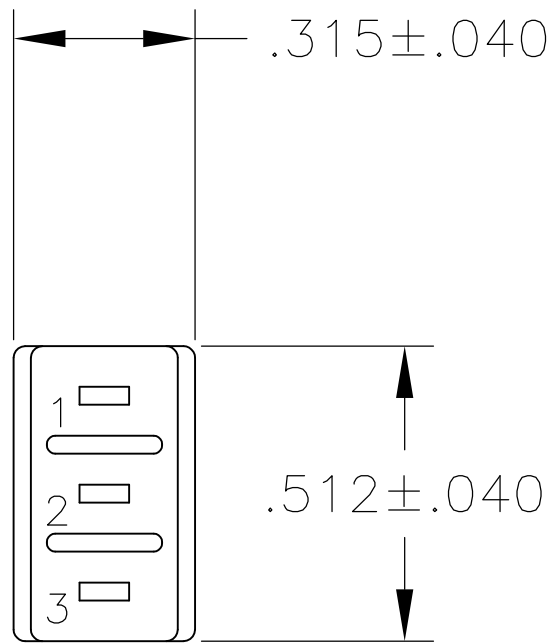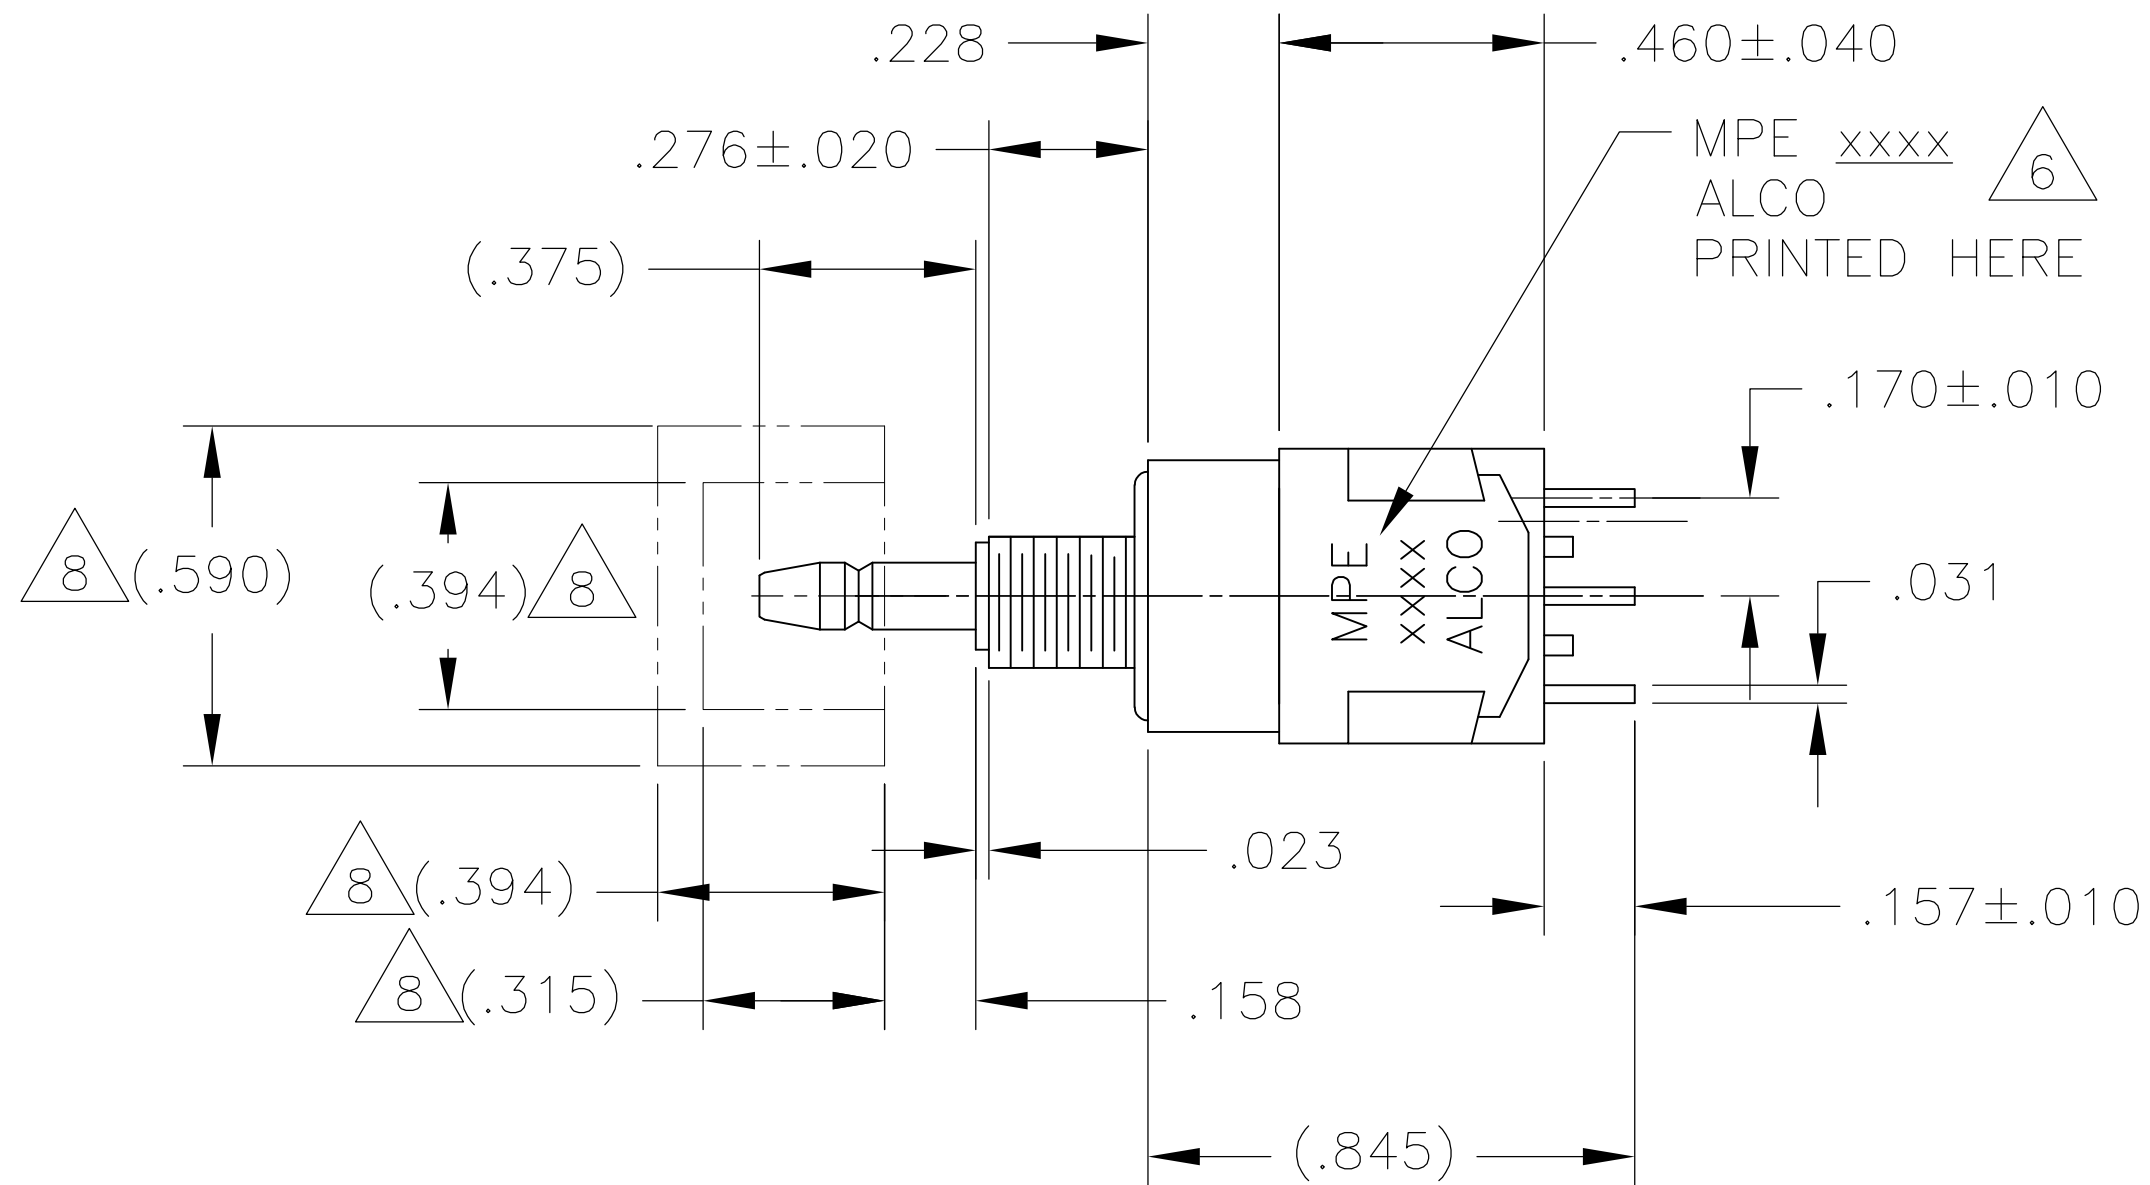


MPE-106

MPE-206

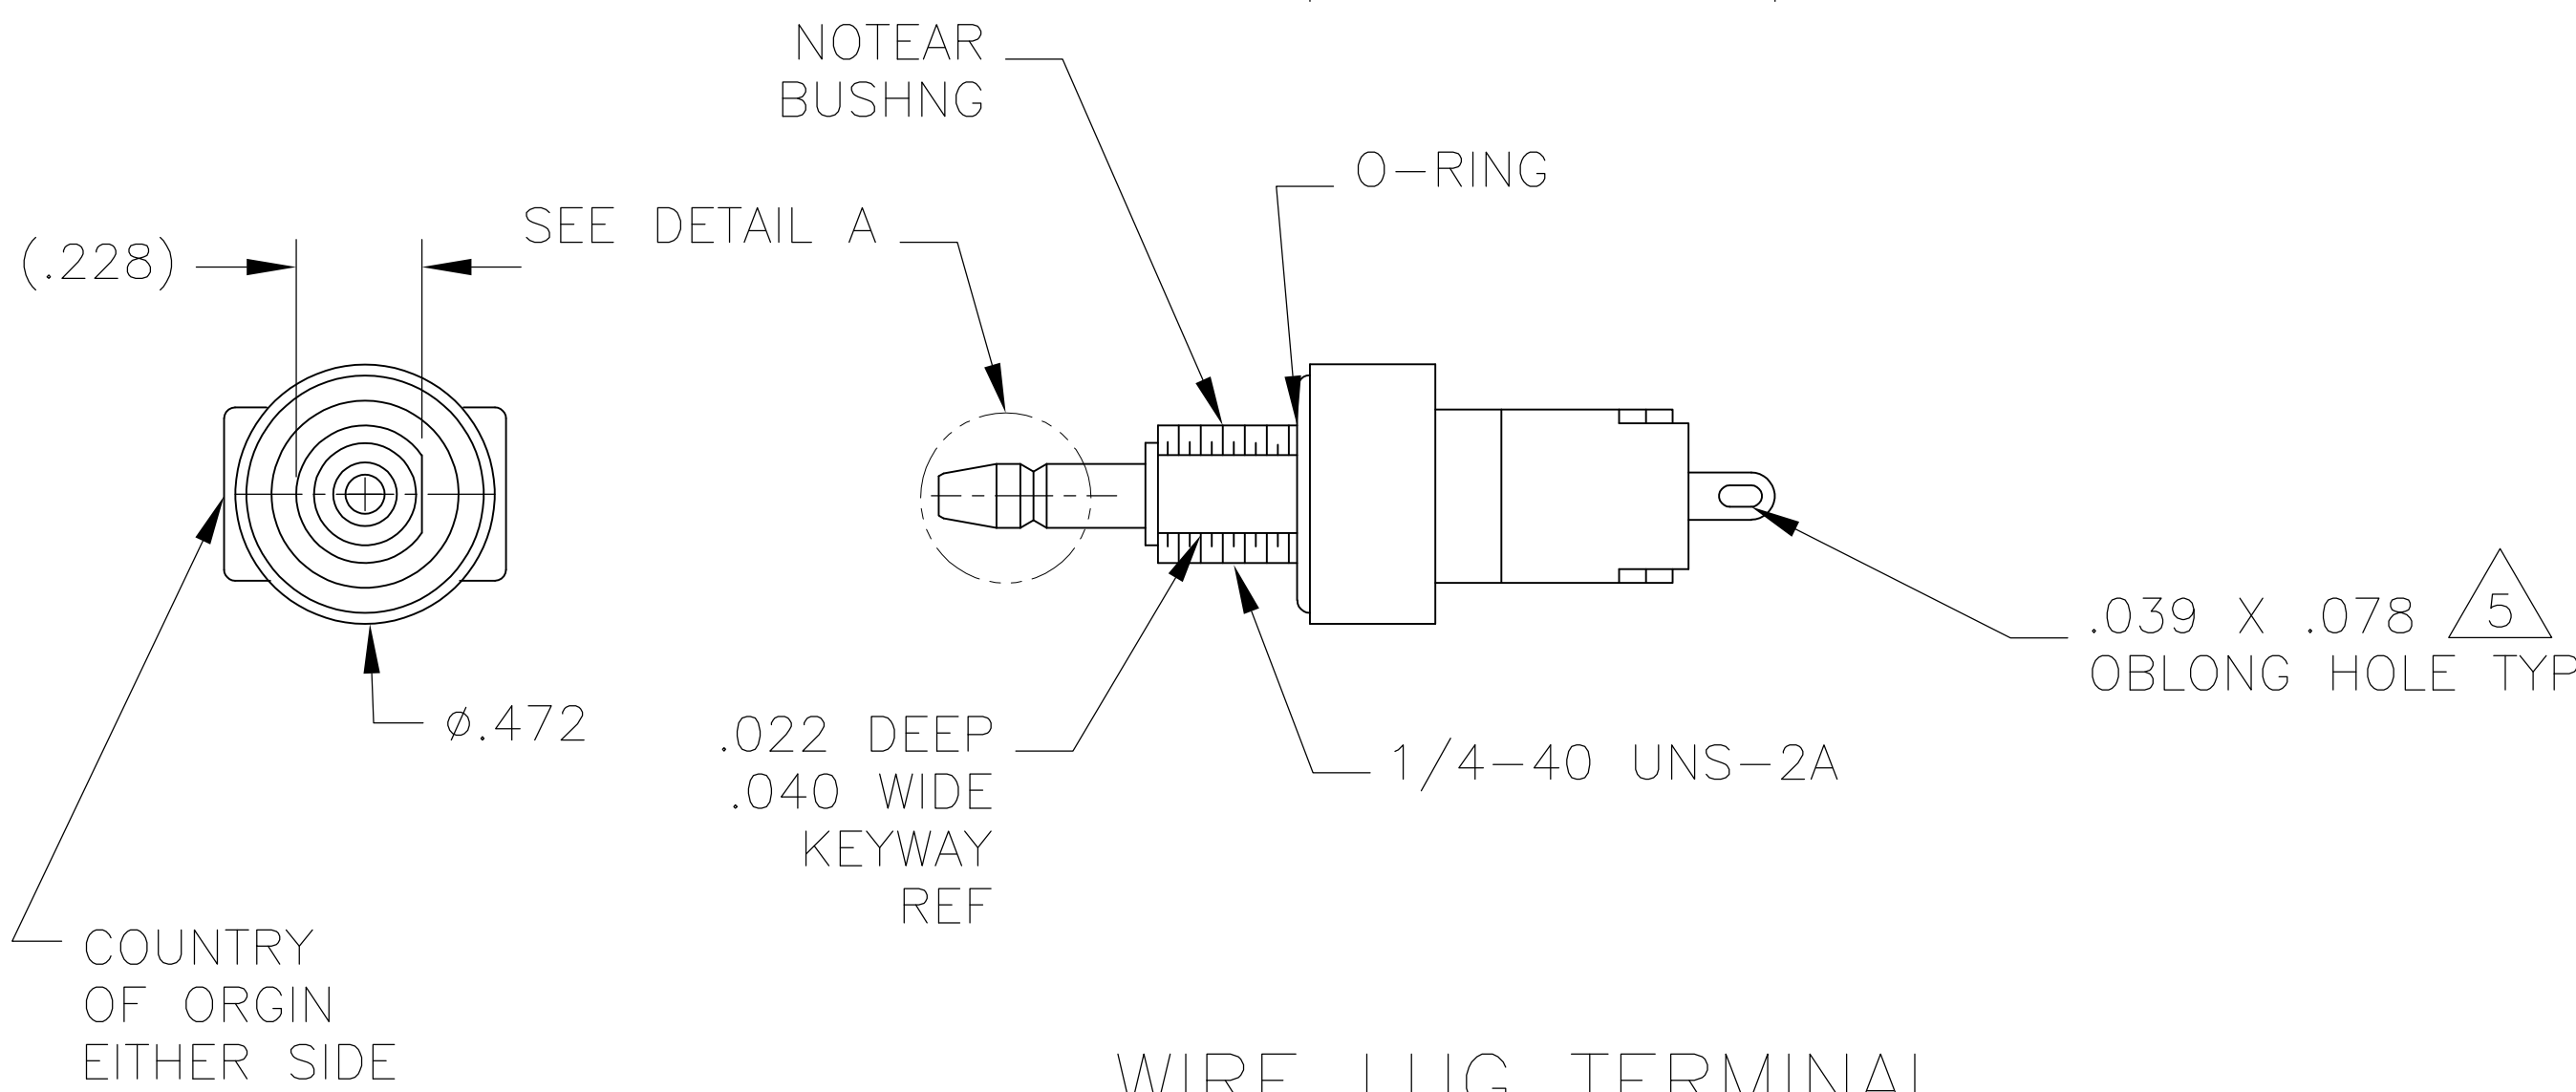

WIRE LUG TERMINAL

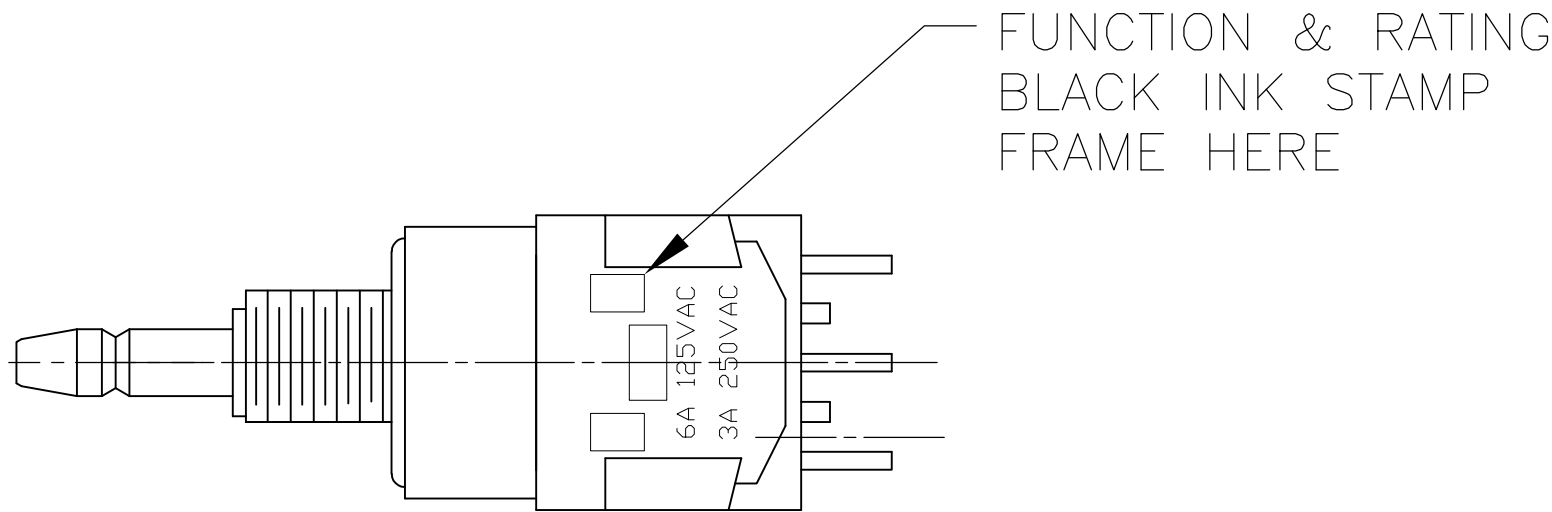

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.BINNER 15NOV04	 TE Connectivity	
		CHK M.ZITTO 15NOV04		
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M.ZITTO 15NOV04	NAME	
		PRODUCT SPEC	ALCOSWITCH GREEN SERIES PUSHBUTTON SWITCH, MPE SERIES	
	0. PLC ± .012 1. PLC ± .012 2. PLC ± .012 3. PLC ± .012 4. PLC ± .012 ANGLES ± .012	APPLICATION SPEC	SIZE	
		—	CAGE CODE	
MATERIAL	FINISH	WEIGHT	DRAWING NO	RESTRICTED TO
—	—	—	A1 00779 C 4-1437567-3	—
CUSTOMER DRAWING			SCALE	SHEET
			3:1	2 OF 3
				REV A6

