

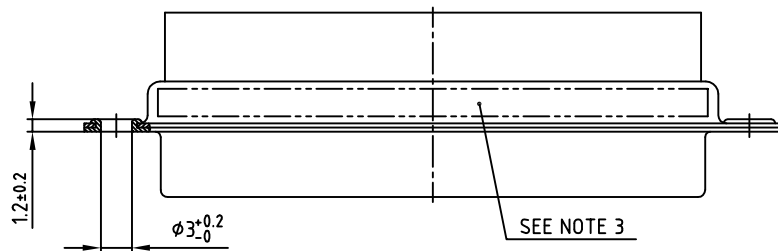


used for:	D-SUB
-----------	-------

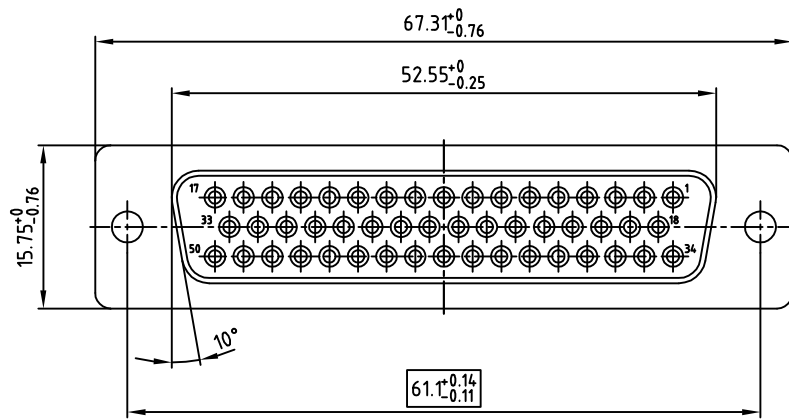

NOTES:

1. METALSHELLS: STEEL; min. 320µ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONNECTOR IS PART MARKED: 164X1180

G:\RohS_Compliant_gross_0001.jpg

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance	 dim. in mm	
				2005	date	name
				drawn	22.04.	Schmidt
				appd.	22.04.	Kühle
				norm	DIN 41652	
				d-old		
						
rev.	description	date	name			



scale:		2:1	
material:		SEE NOTES	
title:		D-SUB FEMALE CRIMP STYLE 50pos.	
dwg no:		AutoCAD 2004	DIN-A
16K1A1386		3	sh: 1/1
part no:		164X11809X	