

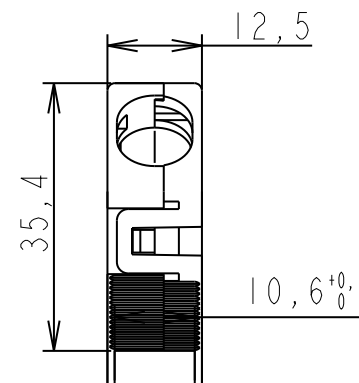
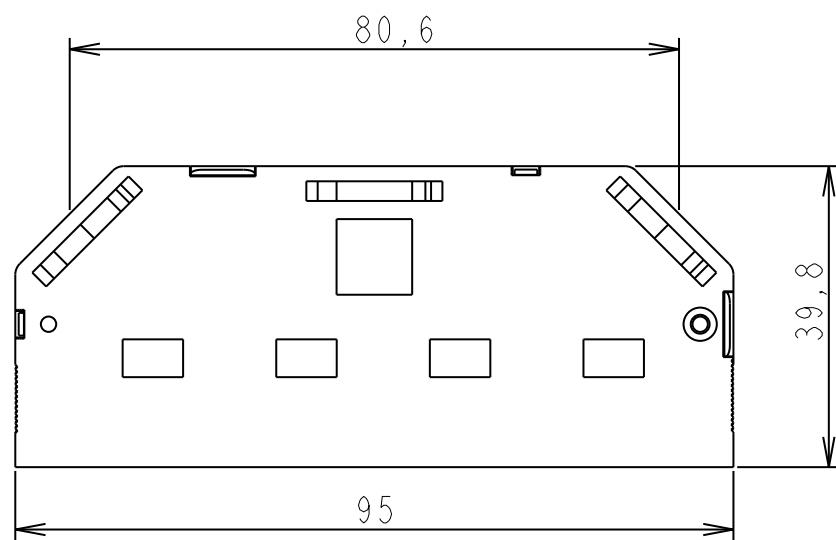




PACKAGING:  
- Each P/N consists of 2 half hoods  
- 20 P/N in plastic bag (40 half hoods)  
- Such 10 plastic bags in a suitable shipping box

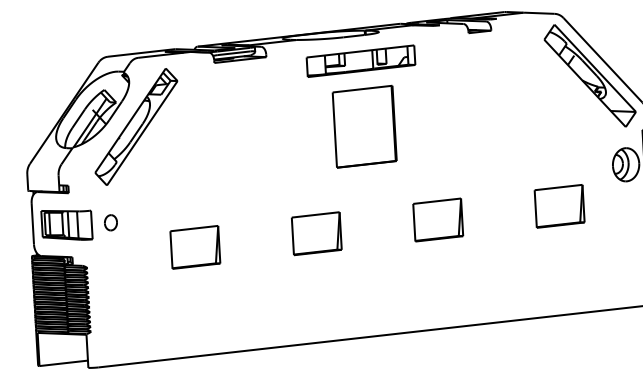

#### NOTE:RoHS INFORMATIONS

- The "LF" product meets European union Directives and other country regulations as described in GS-22-008.
- The product is not intended to be exposed to a manufacturing solder process.
- Packaging spec: see GS-14-920.

Part  
Number

8609-3162LF

|                    |             |            |                                       |        |                                   |      |                           |       |          |  |           |  |             |  |              |  |
|--------------------|-------------|------------|---------------------------------------|--------|-----------------------------------|------|---------------------------|-------|----------|--|-----------|--|-------------|--|--------------|--|
| www.fciconnect.com |             |            | surface<br>ISO 1302                   |        | tolerance std<br>ISO 406 ISO 1101 |      | projection<br>            |       | mm<br>   |  |           |  |             |  |              |  |
|                    |             |            | TOLERANCES UNLESS OTHERWISE SPECIFIED |        |                                   |      |                           |       |          |  |           |  |             |  |              |  |
| Dr                 | GOISNARD    | 2005-10-17 | ANGULAR                               | LINEAR | 0.X                               | ±0.3 | size                      |       | Scale    |  |           |  |             |  |              |  |
| Eng                | TARON       | 2005-10-17 |                                       |        | 0.XX                              | ±0.1 | A3                        |       | 1/1      |  |           |  |             |  |              |  |
| Chr                | M JACOB     | 2011-03-21 |                                       |        | 0°                                | ±2°  | 0.XXX                     | ±0.05 | ECN      |  | LS06-0208 |  |             |  |              |  |
| Appr               | BIJU K PAUL | 2011-03-21 | Product family                        |        |                                   |      | DIN                       |       | Spec ref |  |           |  |             |  |              |  |
|                    |             |            | title                                 |        |                                   |      | CAPOT DIN 41612           |       |          |  | dwg no    |  | C-8609-1198 |  | Rev.         |  |
|                    |             |            | title                                 |        |                                   |      | POUR CONNECTEUR 96 POINTS |       |          |  |           |  |             |  | C            |  |
|                    |             |            | catalog no                            |        |                                   |      |                           |       |          |  | CUSTOMER  |  |             |  | sheet 1 of 1 |  |

| rev | ecn no    | dr  | date       |
|-----|-----------|-----|------------|
| A   | LS05-0086 | HLE | 2005-10-17 |
| B   | LS06-0208 | LGO | 2006-12-12 |
| C   | 111-0057  | MJA | 2011-03-21 |
| -   | -         | -   | -          |
| -   | -         | -   | -          |
| -   | -         | -   | -          |
| -   | -         | -   | -          |



CAPOT DIN 41612  
POUR CONNECTEUR 96 POINTS

catalog no

dwg no

C-8609-1198

Rev.

C

CUSTOMER

sheet 1 of 1