

## 350mW, SMD Switching Diode

### FEATURES

- Designed for mounting on small surface
- Low Capacitance
- Low forward voltage drop
- Compliant to RoHS directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21

### APPLICATIONS

- Switching mode power supply (SMPS)
- Adapters
- Lighting application
- On-board DC/DC converter

### MECHANICAL DATA

- Case: SOT-23
- Molding compound meets UL 94 V-0 flammability rating
- Moisture sensitivity level: level 1, per J-STD-020
- Packing code with suffix "G" means green compound (halogen-free)
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 1A whisker test
- Polarity: Indicated by cathode band
- Weight: 8 mg (approximately)

| KEY PARAMETERS      |             |      |
|---------------------|-------------|------|
| PARAMETER           | VALUE       | UNIT |
| $I_{F(AV)}$         | 200         | mA   |
| $V_{RRM}$           | 100         | V    |
| $I_{FSM}$           | 2           | A    |
| $V_F$ at $I_F=10mA$ | 1           | V    |
| $T_J$ Max.          | 150         | °C   |
| Package             | SOT-23      |      |
| Configuration       | Single dice |      |



| ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted) |               |             |             |      |
|-----------------------------------------------------------------------------|---------------|-------------|-------------|------|
| PARAMETER                                                                   |               | SYMBOL      | PART NUMBER | UNIT |
| Marking code on the device                                                  | MMBD4148      |             | 5D          |      |
|                                                                             | MMBD4148CA    |             | A1          |      |
|                                                                             | MMBD4148CC    |             | A4          |      |
|                                                                             | MMBD4148SE    |             | A7          |      |
| Repetitive peak reverse voltage                                             |               | $V_{RRM}$   | 75          | V    |
| Forward current                                                             |               | $I_{F(AV)}$ | 200         | mA   |
| Repetitive peak forward surge current                                       |               | $I_{FRM}$   | 700         | mA   |
| Non-repetitive peak forward surge current                                   | at $t=1\mu s$ | $I_{FSM}$   | 2           | A    |
|                                                                             | at $t=1s$     |             | 1           |      |
| Junction temperature range                                                  |               | $T_J$       | -55 to +150 | °C   |
| Storage temperature range                                                   |               | $T_{STG}$   | -55 to +150 | °C   |

**THERMAL PERFORMANCE**

| PARAMETER                              | SYMBOL          | LIMIT | UNIT |
|----------------------------------------|-----------------|-------|------|
| Junction-to-ambient thermal resistance | $R_{\theta JA}$ | 357   | °C/W |

**ELECTRICAL SPECIFICATIONS** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

| PARAMETER                                              | CONDITIONS                                                                          | SYMBOL     | MIN | MAX  | UNIT          |
|--------------------------------------------------------|-------------------------------------------------------------------------------------|------------|-----|------|---------------|
| Forward voltage per diode <sup>(1)</sup>               | $I_F = 10\text{mA}$ , $T_J = 25^\circ\text{C}$                                      | $V_F$      | -   | 1.0  | V             |
| Reverse current @ rated $V_R$ per diode <sup>(2)</sup> | $V_R = 20\text{V}$ , $T_J = 25^\circ\text{C}$                                       | $I_R$      | -   | 25.0 | nA            |
|                                                        | $V_R = 75\text{V}$ , $T_J = 25^\circ\text{C}$                                       |            | -   | 5.0  | $\mu\text{A}$ |
|                                                        | $V_R = 20\text{V}$ , $T_A = 150^\circ\text{C}$                                      |            | -   | 50.0 |               |
| Reverse breakdown voltage                              | $I_R = 5\mu\text{A}$ , $T_J = 25^\circ\text{C}$                                     | $V_{(BR)}$ | 75  | -    | V             |
|                                                        | $I_R = 100\mu\text{A}$ , $T_J = 25^\circ\text{C}$                                   |            | 100 | -    |               |
| Junction capacitance                                   | 1 MHz, $V_R = 0\text{V}$                                                            | $C_J$      | -   | 4.0  | pF            |
| Reverse recovery time                                  | $I_F = 10\text{mA}$ , $I_R = 1\text{mA}$ ,<br>$R_L = 100\Omega$ , $V_R = 6\text{V}$ | $t_{rr}$   | -   | 4.0  | ns            |

**Notes:**

1. Pulse test with  $PW = 0.3\text{ ms}$
2. Pulse test with  $PW = 30\text{ ms}$

**ORDERING INFORMATION**

| PART NO.               | PACKING CODE | PACKING CODE SUFFIX | PACKAGE | PACKING        |
|------------------------|--------------|---------------------|---------|----------------|
| MMBD414X<br>(Note 1&2) | RF           | G                   | SOT-23  | 3K / 7" Reel   |
|                        | R5           |                     |         | 10K / 13" Reel |

**Notes:**

1. Whole series with green compound
2. "XX" is Device code from "8" to "8SE".


**EXAMPLE**

| EXAMPLE P/N  | PART NO. | PACKING CODE | PACKING CODE SUFFIX | DESCRIPTION    |
|--------------|----------|--------------|---------------------|----------------|
| MMBD4148 RFG | MMBD4148 | RF           | G                   | Green compound |


## CHARACTERISTICS CURVES

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig. 1 Power Derating Curve**

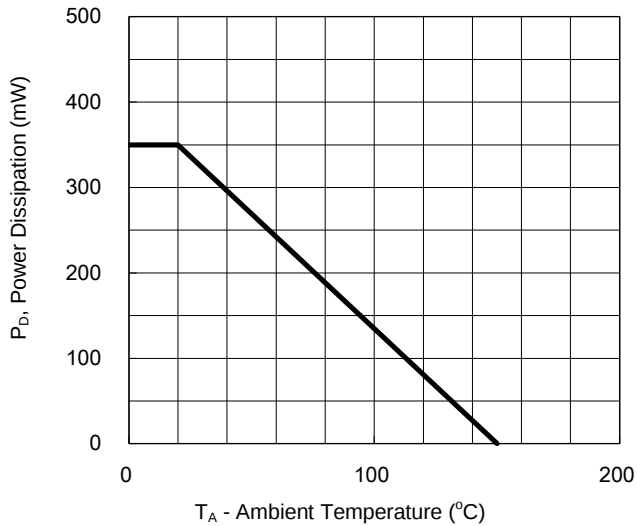


**Fig.2 Forward Characteristics**

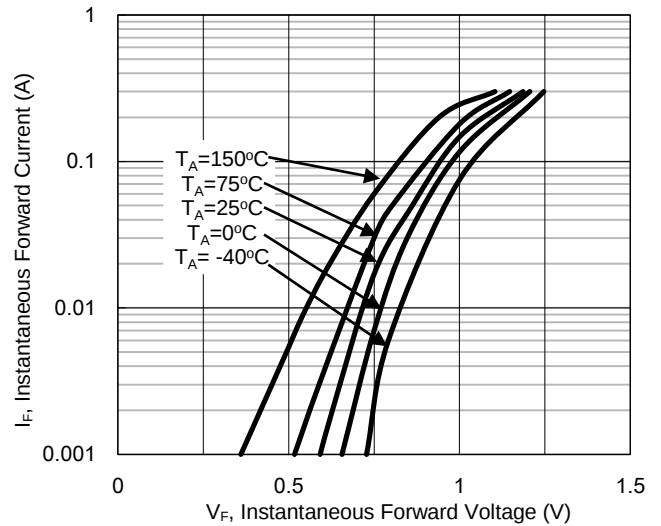


**Fig.3 Typical Reverse Characteristics**

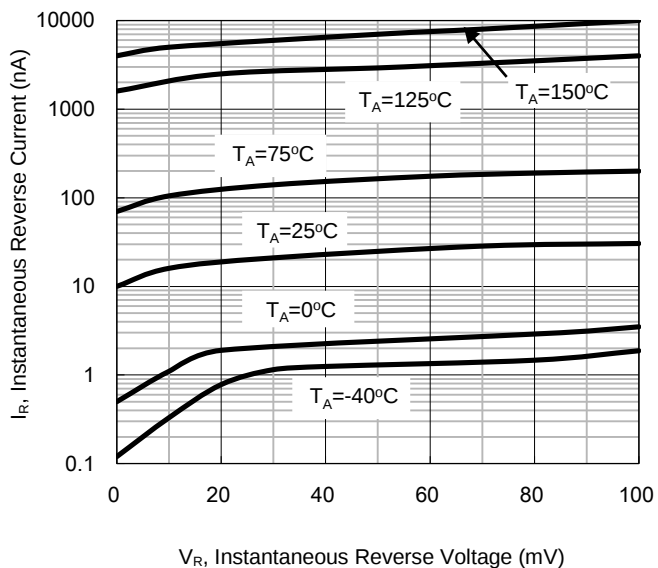

**Fig.4 Typical Capacitance vs. Reverse Voltage**

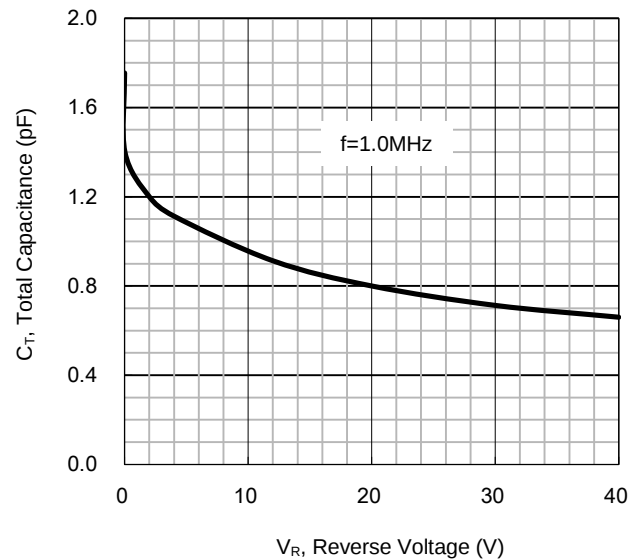


## PACKAGE OUTLINE DIMENSION

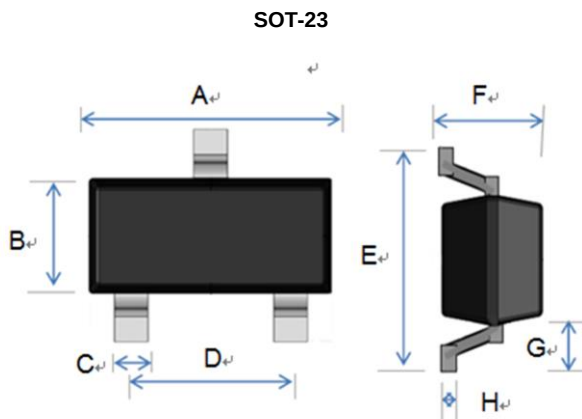


| DIM. | Unit(mm) |      | Unit(inch) |       |
|------|----------|------|------------|-------|
|      | Min      | Max  | Min        | Max   |
| A    | 2.70     | 3.10 | 0.106      | 0.122 |
| B    | 1.10     | 1.50 | 0.043      | 0.059 |
| C    | 0.30     | 0.51 | 0.012      | 0.020 |
| D    | 1.78     | 2.04 | 0.070      | 0.080 |
| E    | 2.10     | 2.64 | 0.083      | 0.104 |
| F    | 0.89     | 1.30 | 0.035      | 0.051 |
| G    | 0.55 REF |      | 0.022 REF  |       |
| H    | 0.10 REF |      | 0.004 REF  |       |

## SUGGEST PAD LAYOUT

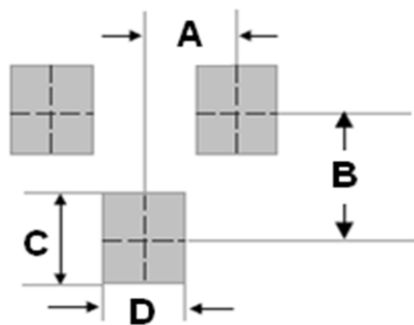


| DIM. | Unit(mm) | Unit(inch) |
|------|----------|------------|
|      | TYP      | TYP        |
| A    | 0.95     | 0.037      |
| B    | 2.00     | 0.079      |
| C    | 0.90     | 0.035      |
| D    | 0.80     | 0.031      |


## PIN CONFIGURATION




**MMBD4148**



**MMBD4148CA**



**MMBD4148CC**



**MMBD4148SE**

## Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.