

| SIGN                                           | DATE       | DESCRIPTION                                     | APPROVER |
|------------------------------------------------|------------|-------------------------------------------------|----------|
| △                                              | 8/07'06    | Added VDE and TUV standard                      | 梁仁松      |
| △                                              | 1/27'07    | Soldering temperature changed from 245° to 250° | Tony     |
| △                                              | 2009.10.27 | The material is changed from Brass to Copper    | Jacke    |
| △                                              | 2009.10.27 | The operating temperature is changed            | Jacke    |
| △                                              | 2010.10.11 | The design is changed                           | Jacke    |
| THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!! |            |                                                 |          |

Material:

- △ ● Item ㉓ Male contact pin: Copper Tin plated
- Item ㉔ Terminal (housing): Thermoplastic (UL94V-0)



- △ Electrical: cULus /VDE/TUV
  - Voltage rating: 300V/300V/300V
  - Current rating: 15A/17A/20A
  - Withstanding Voltage: 1.6 KV/2.5KV/2.5KV
  - △ ● Operating temperature: -40°C to +115°C
  - △ ● Soldering temperature: 250°C±10°C/5 Sec
  - Safety Approval:   

VK xx 7 0 x 0 xxxx G

No. OF POLES  
02: 2 POLES  
:  
24: 24 POLES

COLOR  
0 Black (RAL9005)  
2 Red (RAL3001/D)  
3 Orange(RAL2011/P)  
4 Yellow(RAL1018/A)  
5 Green(RAL6018/T)  
6 Blue (RAL5015/A)  
8 Grey(RAL7035/D)

G: Pb<40000ppm  
0000: "@ " Logo (Standard)  
000A: "ANYTEK" Mark  
Any special item by customer request.  
please contact sales department.

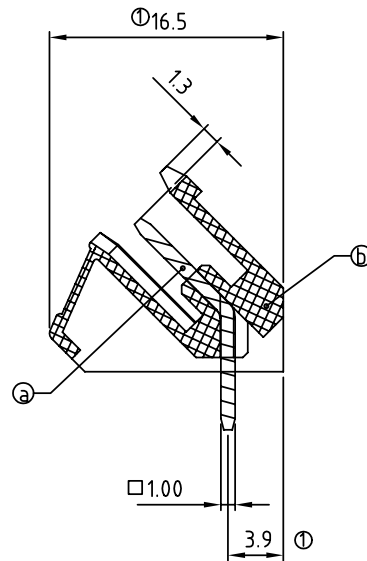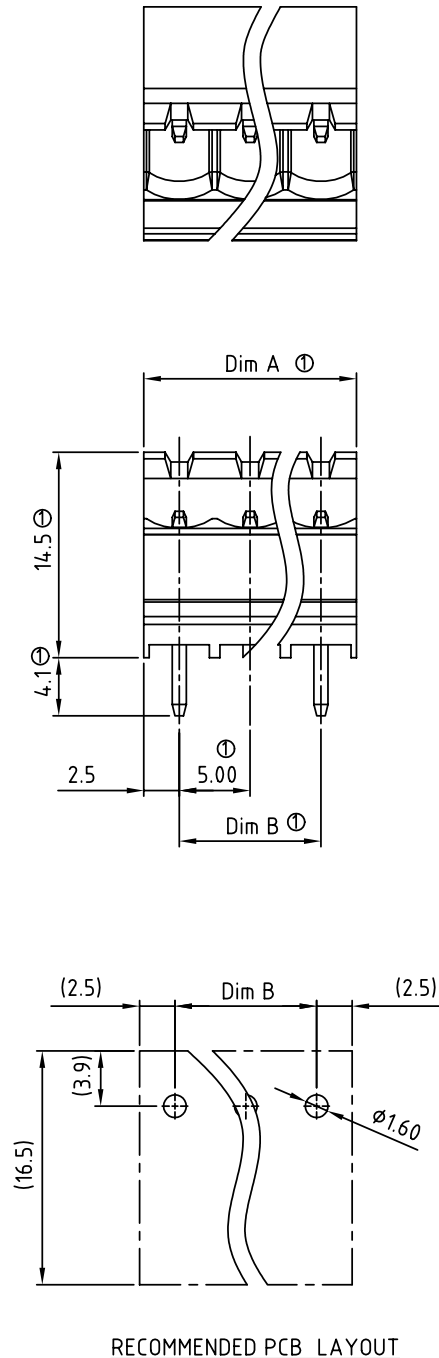

N = Number of poles  
Dim A=Nx5.0  
Dim B=(N-1)x5.0

|        | Dim A | Dim B |
|--------|-------|-------|
| 2-6p   | ±0.15 | ±0.15 |
| 7-12p  | ±0.20 | ±0.20 |
| 13-18p | ±0.30 | ±0.30 |
| 19-24p | ±0.40 | ±0.40 |

|                                                                                                                                                                                         |                         |                     |                     |                                                                                       |         |             |            |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|---------------------|---------------------|---------------------------------------------------------------------------------------|---------|-------------|------------|
| ANYTEK                                                                                                                                                                                  |                         |                     |                     | CUSTOMER COPY                                                                         |         |             |            |
| ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD |                         |                     |                     |                                                                                       |         |             |            |
| TITLE                                                                                                                                                                                   | VK-5.0 Series Open type |                     |                     |                                                                                       |         |             |            |
| PART NO.                                                                                                                                                                                | VKxx70x0xxxxG           |                     |                     | DWG NO.                                                                               | 8VK0202 |             |            |
| APPROVED                                                                                                                                                                                | CHECKED                 | DESIGNED            | DRAWN               | CUST NO.                                                                              |         | Tolerance   |            |
|                                                                                                                                                                                         |                         | Jacke<br>2010.10.11 | Jacke<br>2009.10.27 |  |         | UNIT: mm    | X. ±0.50   |
|                                                                                                                                                                                         |                         |                     |                     |                                                                                       |         | SCALE: NONE | X.X ±0.30  |
|                                                                                                                                                                                         |                         |                     |                     | SHEET: 01/01                                                                          |         | REV: G      | X.XX ±0.10 |
|                                                                                                                                                                                         |                         |                     |                     |                                                                                       |         |             | X° ±1°     |