

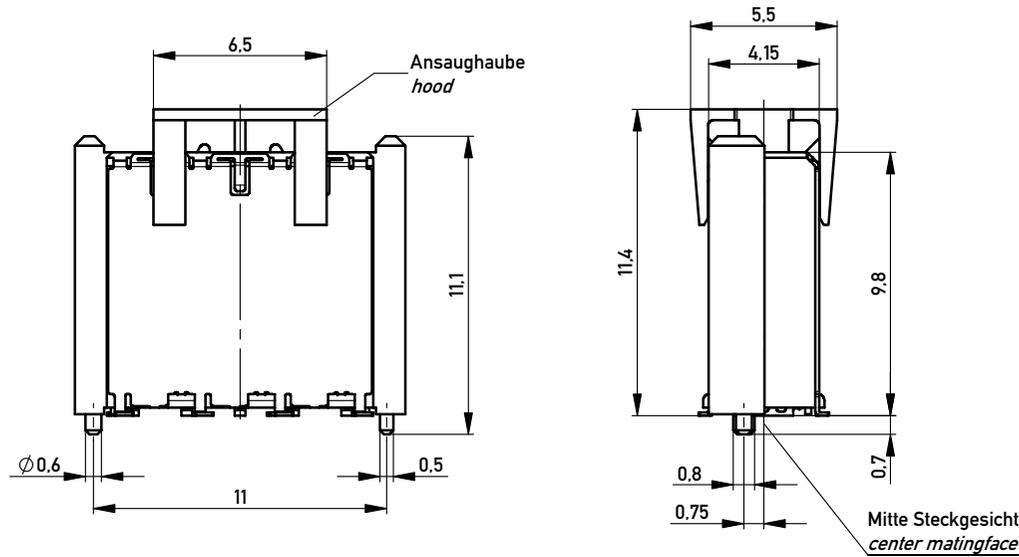




Verpackt in Gurtverpackung
 Tape on Reel Packaging
 Verpackungseinheit: 260 Stück
 Packaging unit: 260 pcs

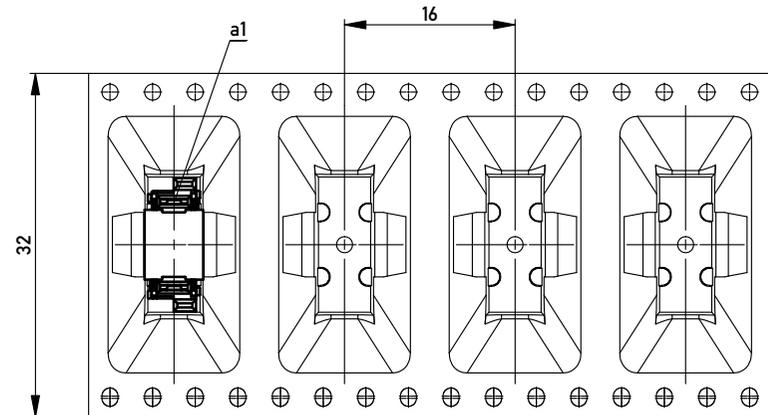

Abspulrichtung - Reel off Direction →

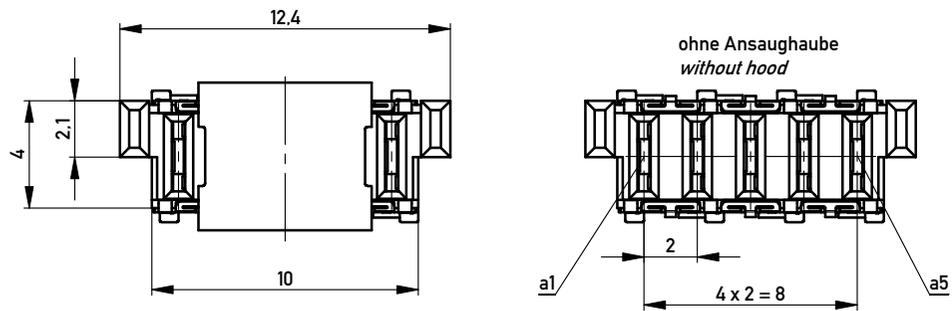

Leiterplatten-Layout Vorschlag / PCB-layout proposal

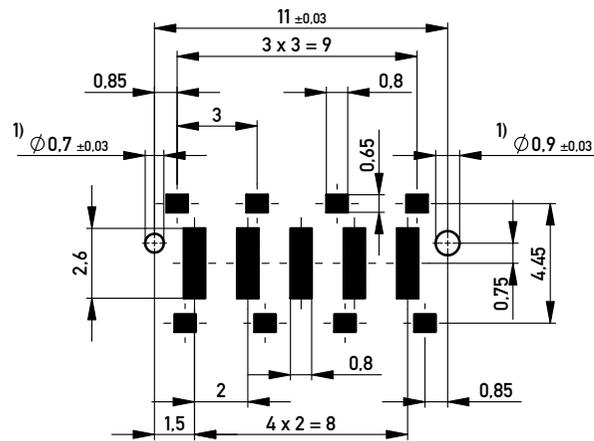

1) Durchmesser des Bohrers / Drill tool

Anforderungsstufe 1
 Performance level 1

Kontaktbereich vergoldet
 Mating area gold plating

Anschlussbereich verzinkt 4-6µm
 Terminal Area 4-6µm tin plating

Koplanarität der Anschlüsse ≤ 0.1mm
 Coplanarity area of termination ≤ 0.1mm

Information:	Tolerances	 All Dimensions in mm	Scale	5:1
	All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.			
Subject to modification without prior notice. Drawing will not be updated.	Designation F10 MSpeed BlindMate PM SMD		354268	
	www.ERNI.com		Class	MSPEED
b	19.09.2012			I
Index	Date			A3

Copyright by ERNI GmbH. Proprietary notice pursuant to ISO 9006 to be observed.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[354268](#)