
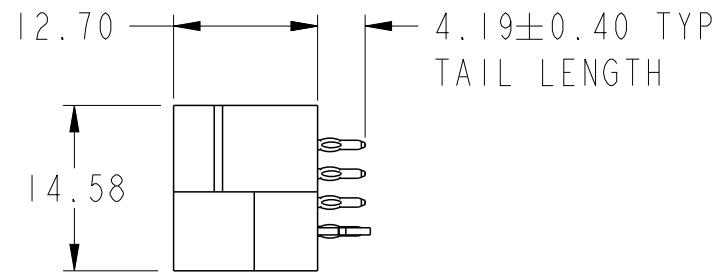
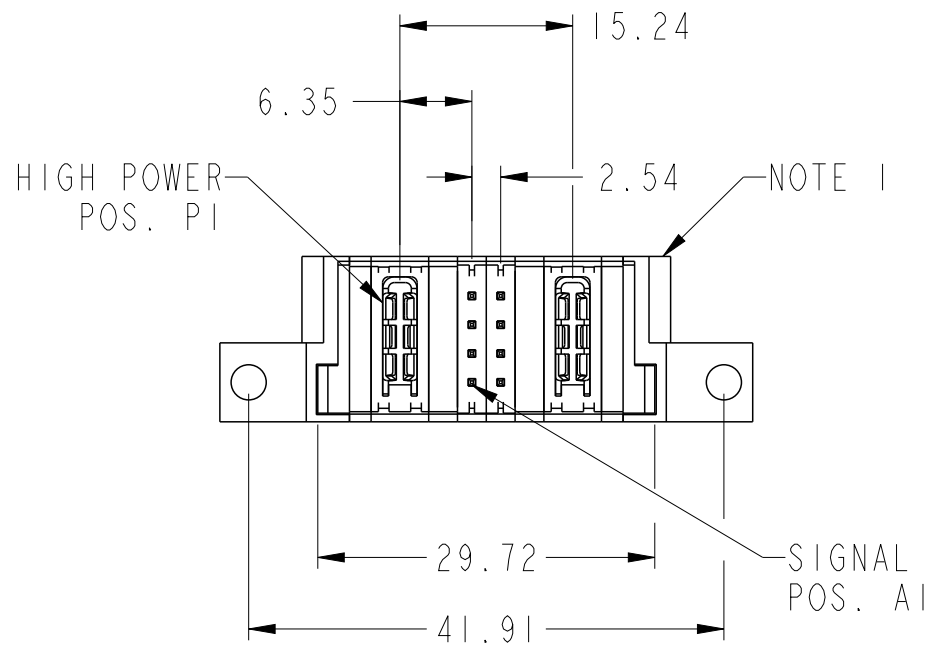
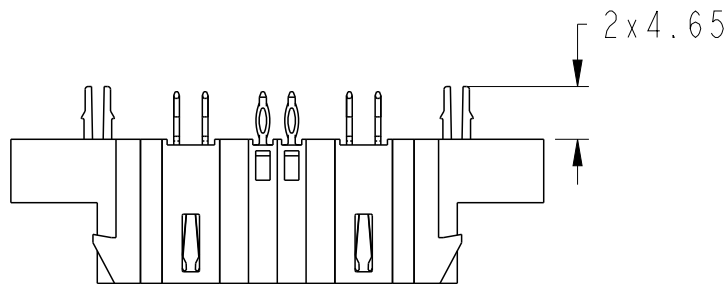


PART NUMBER SEE SHEET 2

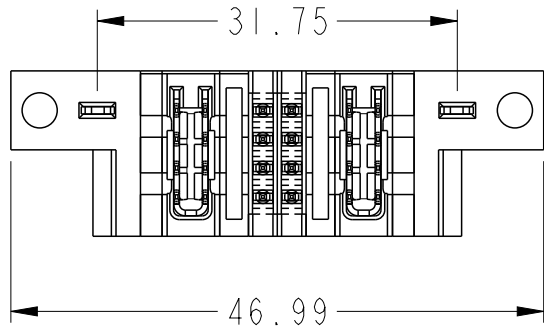

spec ref *				dr Eddy Zeng		2014/05/16		projection		MM		size A3		scale 3:2			
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng Vicking Liu		2016/07/12				ecn no ELX-DG-24476-1					
ASME Y14.5						chr Fancy Zhang		2016/07/12									
						appr Pei-Ming Zheng		2016/07/12				product family		PwrBlade+		rel level Released	
surface		linear		0.X ±0.5		±0.25		Amphenol FCI		title IHP + 8S + IHP(STR)		dwg no 10128889-901		rev B			
																0.XX ±0.10	
																0.XXX ±0.10	
ASME Y14.5		angular		0° ±2°				cat. no.		Product - Customer Drw		sheet 1 of 3					

A

B

C

D

PRODUCT NO.	ROWS		HP	S	HP	
		E1	P1	1 2	P2	E2
10128889-901LF	DCBA		H4	G G G G	H4	




CODE	DESCRIPTION
G	STD SIGNAL CONTACT
H4	STD HIGH POWER CONTACT
HA	METAL HOLD DOWN

A

B

C


D

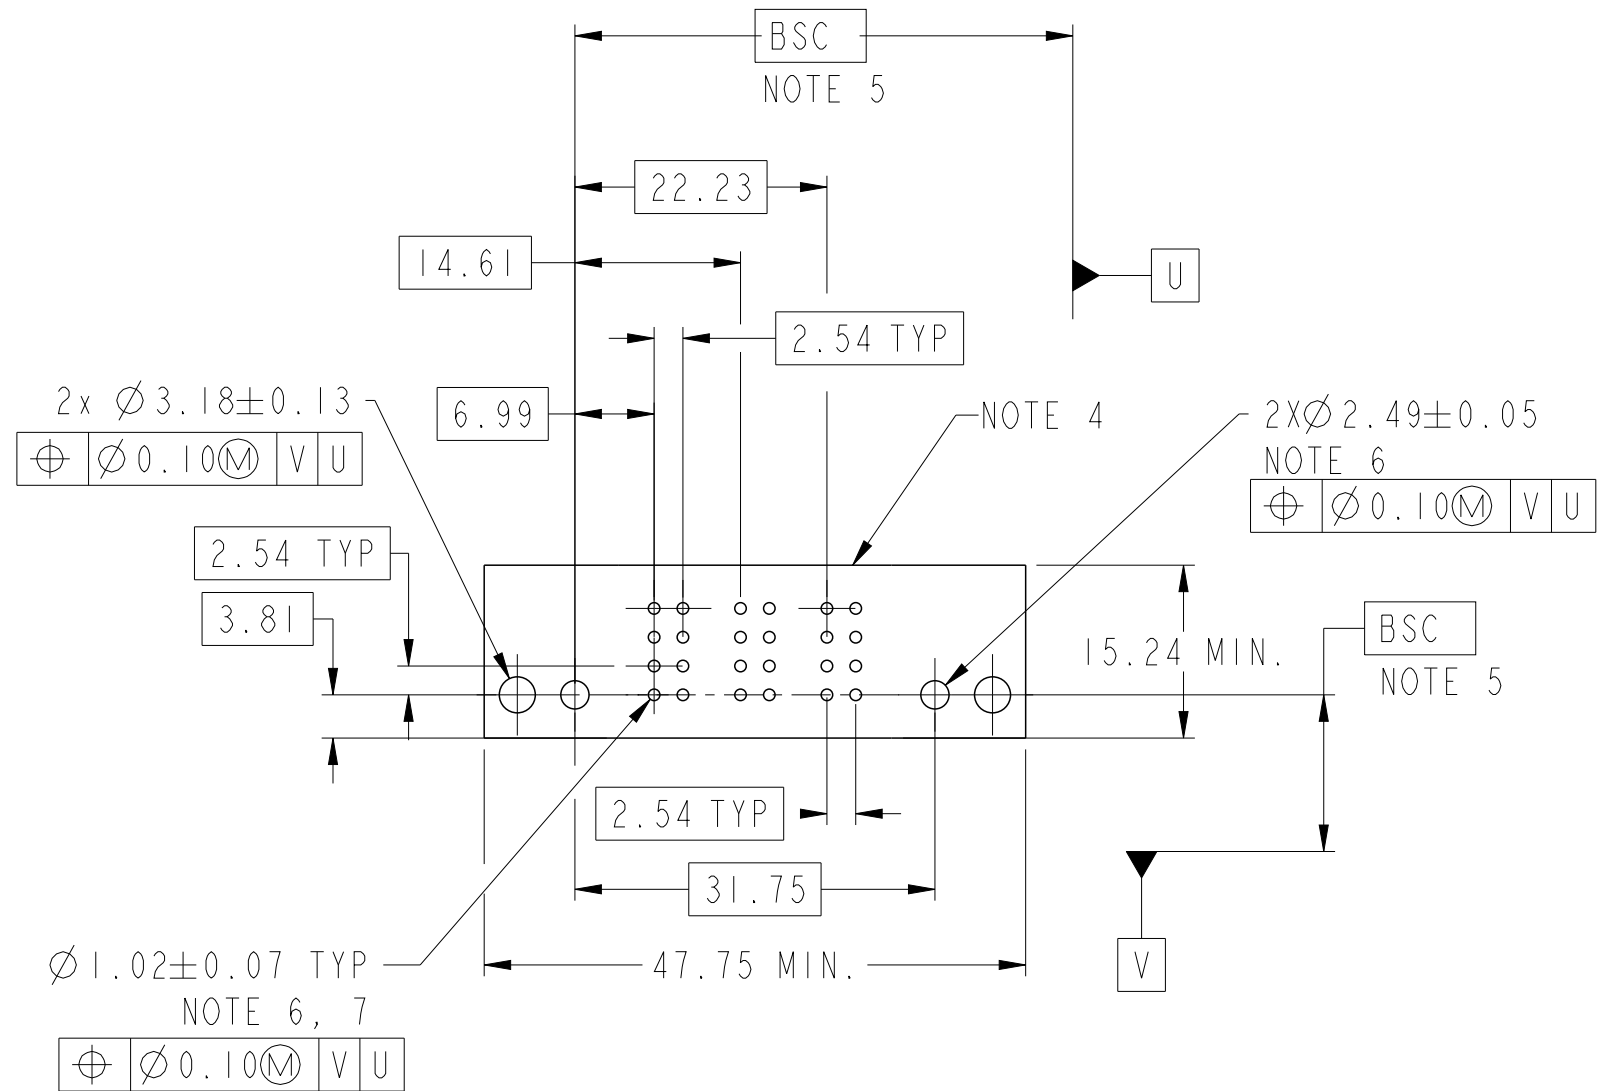

spec ref		*		dr		Eddy Zeng		2014/05/16		projection				MM		size		A3		scale		3:2											
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Vicking Liu		2016/07/12						ecn no		ELX-DG-24476-1															
ASME Y14.5						chr		Fancy Zhang		2016/07/12								product family						PwrBlade+						rel level		Released	
						appr		Pei-Ming Zheng		2016/07/12																							
surface		linear		0.X		±0.5		Amphenol FCi		title		IHP + 8S + IHP(STR)		dwg no		10128889-901		rev		B													
				0.XX		±0.25																											
				0.XXX		±0.10																											
ASME Y14.5		angular		0°		±2°				cat. no.		Product - Customer Drw		sheet 2 of 3																			

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI **10123565**
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ± 0.025 MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07 MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.
- 9) A  SYMBOL WILL BE NEXT TO ANY DIMENSION,VIEW,OR NOTE
WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

spec ref *				dr	Eddy Zeng	2014/05/16	projection 	MM 	size	A3	scale	3:2	
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Vicking Liu	2016/07/12			ecn no				ELX-DG-24476-1
ASME Y14.5				chr	Fancy Zhang	2016/07/12			rel level				Released
				appr	Pei-Ming Zheng	2016/07/12	product family		PwrBlade+				
surface 	linear	0.X	±0.5	Amphenol FCi	title IHP + 8S + IHP(STR) VERTICAL PF HEADER			dwg no			10128889-901		rev B
		0.XX	±0.25										
		ASME Y14.5	angular		0°	±2°	cat. no.			Product - Customer Drw			