

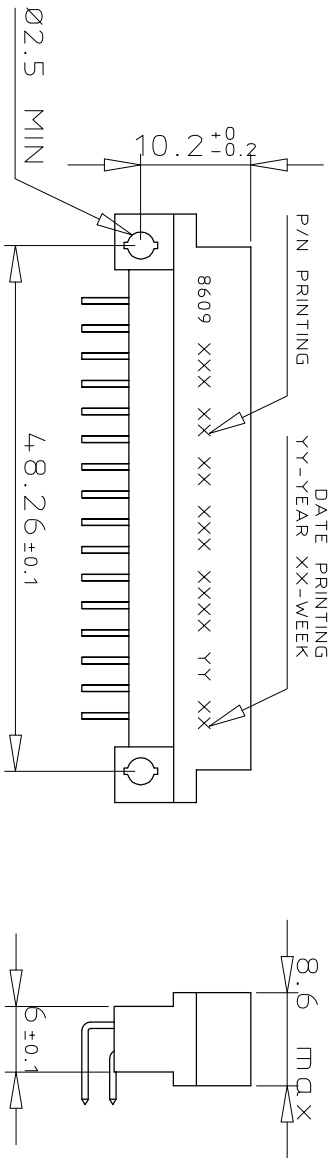


DIMENSIONS

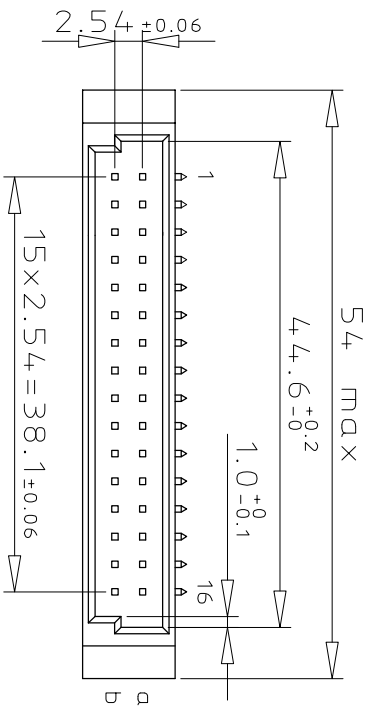


TERMINATION

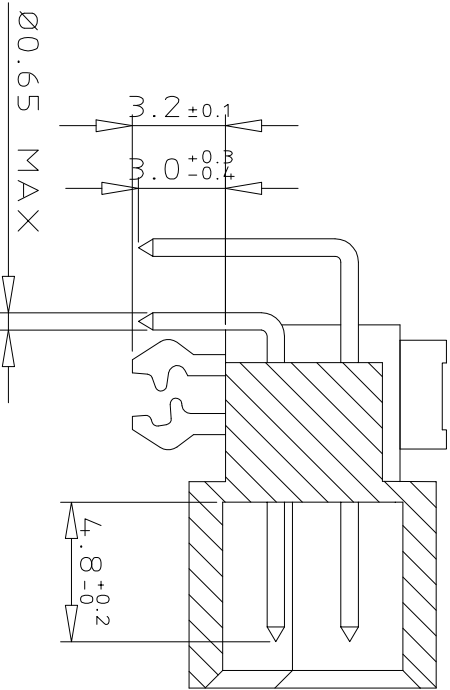

ORDERING INFORMATION

SERIES	8609	2	32	5	3	13	7	4	5	ELF
ROWS FITTED WITH CONTACTS										
ROW a	b	-	-	-	-	-	-	-	-	-
ROW a	-	-	-	-	-	-	-	-	-	-
NO. OF CONTACTS										
TYPE OF INSULATOR										
2 ROW MALE INSULATOR										
METHOD OF MOUNTING										
STANDARD MOUNTING - STYLE B/2										
TERMINATION										
ANGLED SPILL										
OPTIONS										
NO. OPTION WITH HARPOONS										
PERFORMANCE CLASS										
DIN 41612 CLASS 3										
DIN 41612 CLASS 2										
DIN 41612 CLASS 1										
AS PER MIL C 55302 / JSS 50808										
PITCH PER ROW										
2.54 mm										
LEAD FREE VERSION										

PCB LAYOUT

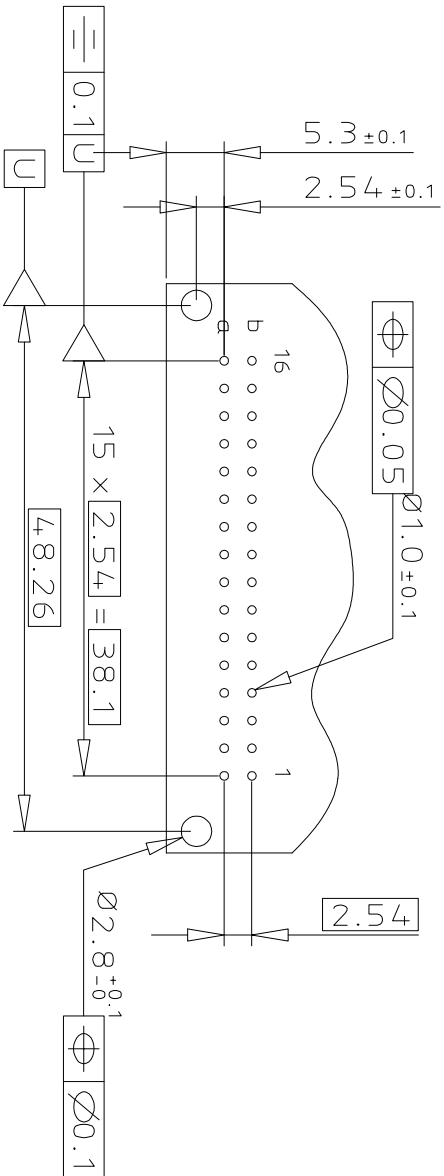

GENERAL CHARACTERISTICS & ROHS INFO
REFER DRAWING C-8609-0000A

mat'l. code				surface		tolerance		projection		product family					
SEE DWG C-8609-0000A				ISO 1302		ISO 406 ISO 1101				8609					
ltr	ecn	no	dr	date		tolerances unless otherwise specified		angles		linear		0.X		±0.1	
A	104-	0063	MINI	2004-09-17				q				0.X		±0.1	
B	105-	0089	MINI	2005-05-19				q				0.XX		±0.1	
C	106-	0061	MINI	2006-05-31		0°±2°		0.XXX				±0.1			
D	107-	0155	KR	2007-11-14		dr		MINI K V				2004-09-17			
E	108-	0146	KR	2008-10-21		chr		RAKHEE G				2004-09-17			
						chr		KESAVAN R				2008-10-21			
						qpdd		KESAVAN R				2008-10-21			
sheet index				revision		E									
index				sheet		1									



dwg no	sheet 1 of 1	size
C-8609-2009	A3	
type	Product	Customer Drawing