

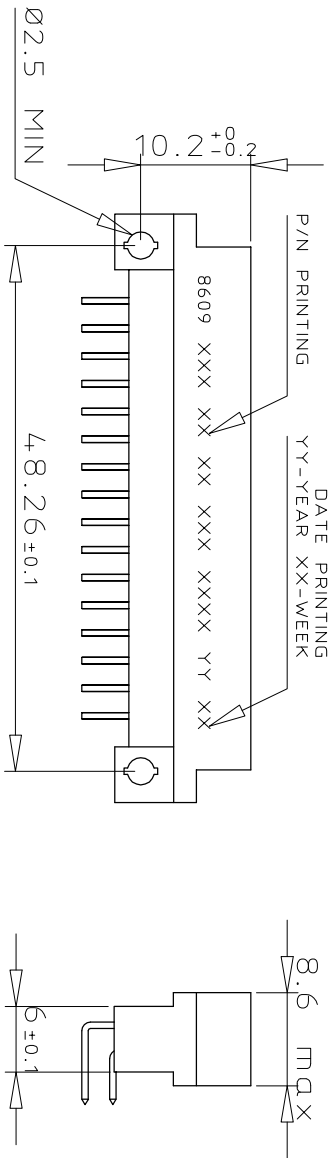


DIMENSIONS

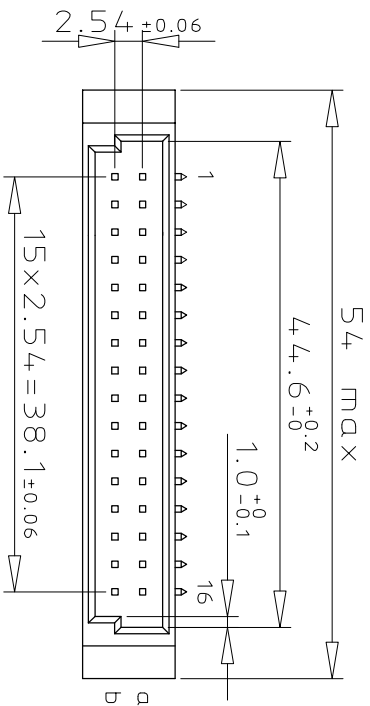


TERMINATION

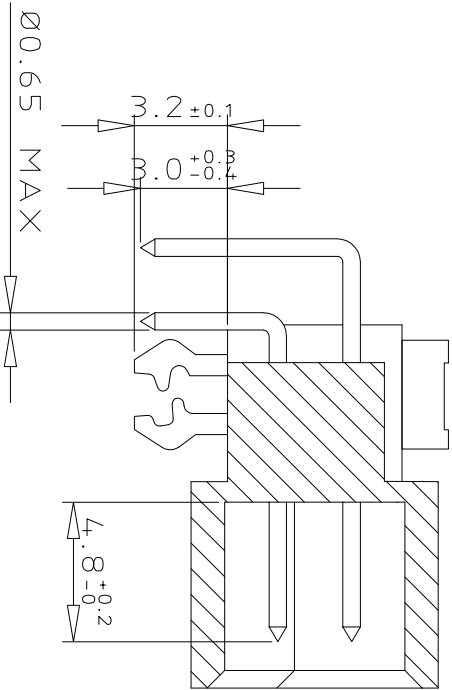

ORDERING INFORMATION

SERIES	8609	2	32	5	3	13	7	4	5	ELF
ROWS FITTED WITH CONTACTS	ROW a	b	-	-	-	-	-	-	-	-
NO. OF CONTACTS	ROW a	-	-	-	-	-	-	-	-	-
TYPE OF INSULATOR	2 ROW MALE INSULATOR	-	-	-	-	-	-	-	-	-
METHOD OF MOUNTING	STANDARD MOUNTING - STYLE B/2	-	-	-	-	-	-	-	-	-
TERMINATION	ANGLED SPILL	-	-	-	-	-	-	-	-	-
OPTIONS	NO. OPTION WITH HARPOONS	-	-	-	-	-	-	-	-	-
PERFORMANCE CLASS	DIN 41612 CLASS 3	-	-	-	-	-	-	-	-	-
LEAD FREE VERSION	2.54 mm	-	-	-	-	-	-	-	-	-

PCB LAYOUT

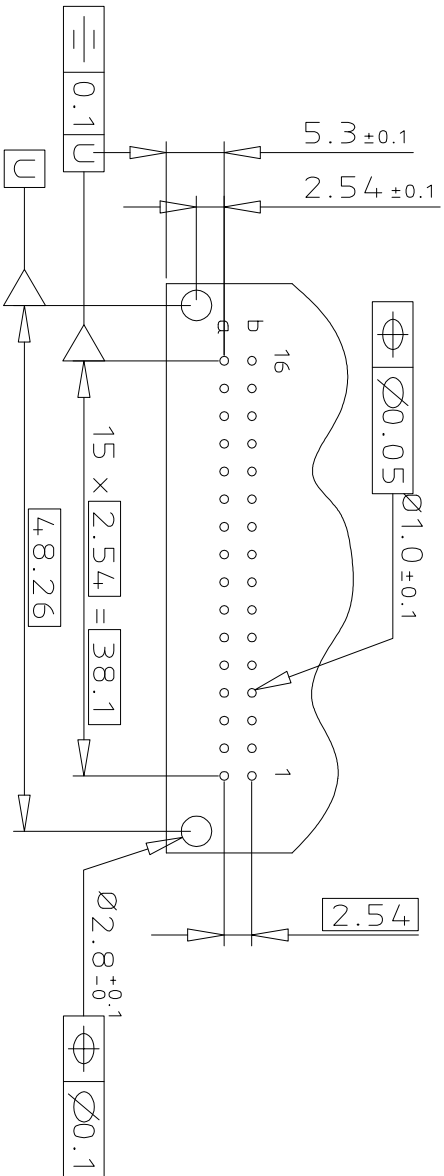

GENERAL CHARACTERISTICS & ROHS INFO
REFER DRAWING C-8609-0000A

mat'l. code SEE DWG C-8609-0000A				surface ISO 1302		tolerance ISO 406 ISO 1101		projection 		product family 8609			
ltr	ecn	no	dr	date	tolerances unless otherwise specified		angles	linear	0.X	±0.1	mm ↔		title
A	104-	0063	MINI	2004-09-17			angles		0.X	±0.1			DIN STANDARD HEADER
B	105-	0089	MINI	2005-05-19					0.XX	±0.1			ANGLED SPILL DIN 41612 STYLE B/2
C	106-	0061	MINI	2006-05-31	0°±2°				0.XXX	±0.1			
D	107-	0155	KR	2007-11-14	dr	MINI K V			2004-09-17				dwg no
E	108-	0146	KR	2008-10-21	chr	RAKHEE G			2004-09-17				sheet 1 of 1
					chr	KESAVAN R			2008-10-21				C-8609-2009
					qpdp	KESAVAN R			2008-10-21				A3
sheet index	revision	E											type
	sheet	1											Product Customer Drawing