
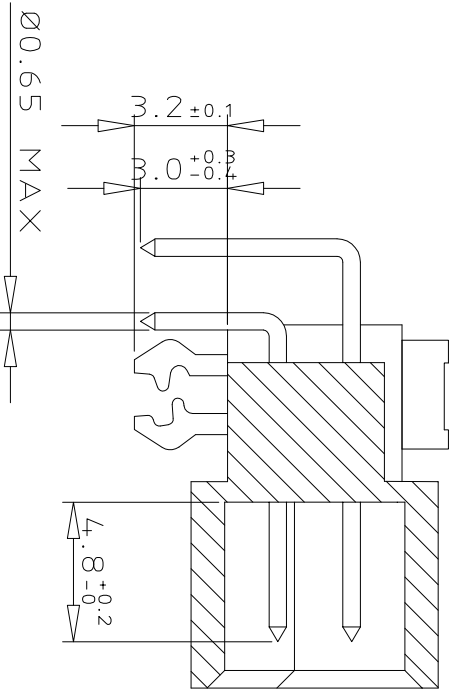
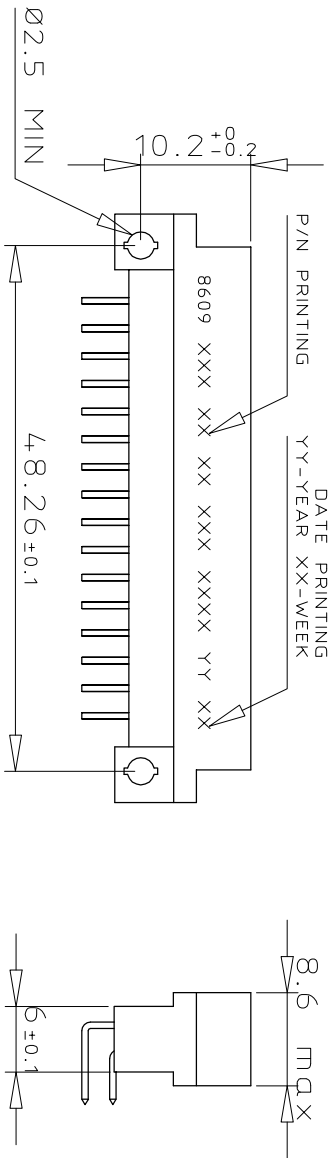


DIMENSIONS

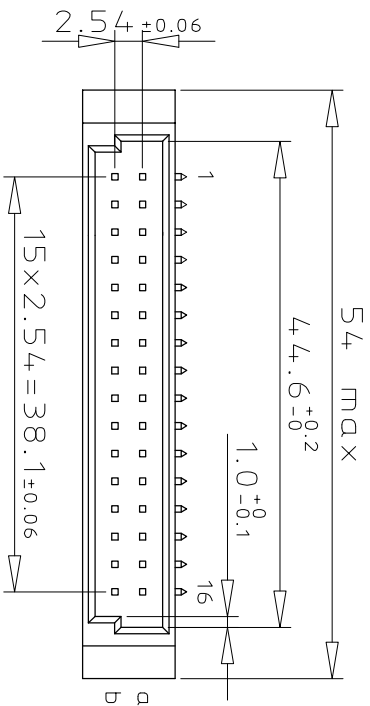


TERMINATION

ORDERING INFORMATION

SERIES	8609	2	32	5	3	13	7	4	5	ELF
ROWS FITTED WITH CONTACTS	ROW a	b	-	-	-	-	-	-	-	-
ROW a	-	-	-	-	-	-	-	-	-	-
NO. OF CONTACTS										
TYPE OF INSULATOR										
2 ROW MALE INSULATOR										
METHOD OF MOUNTING										
STANDARD MOUNTING - STYLE B/2										
TERMINATION										
ANGLED SPILL										
OPTIONS										
NO. OPTION WITH HARPOONS										
PERFORMANCE CLASS										
DIN 41612 CLASS 3										
DIN 41612 CLASS 2										
DIN 41612 CLASS 1										
AS PER MIL C 55302 / JSS 50808										
PITCH PER ROW										
2.54 mm										
LEAD FREE VERSION										

PCB LAYOUT

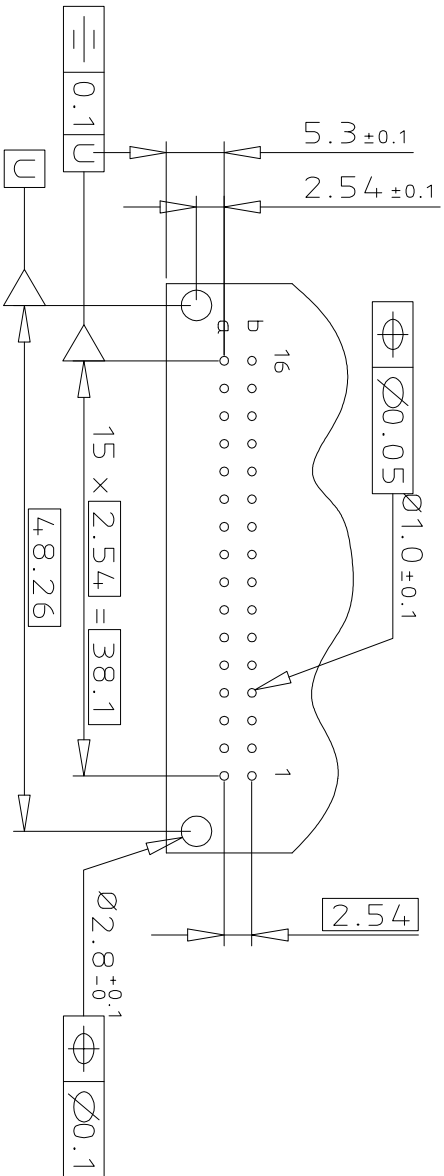

GENERAL CHARACTERISTICS & ROHS INFO
REFER DRAWING C-8609-0000A

mat'l. code SEE DWG C-8609-0000A			surface ISO 1302		tolerance ISO 406 ISO 1101		projection 		product family 8609									
ltr	ecn	no	dr	date	tolerances unless otherwise specified		angles		linear		0.X		±0.1		mm		title DIN STANDARD HEADER	
A	104-	0063	MINI	2004-09-17			0°±2°				0.XXX		±0.1		↔		ANGLED SPILL DIN 41612 STYLE B/2	
B	105-	0089	MINI	2005-05-19														
C	106-	0061	MINI	2006-05-31														
D	107-	0155	KR	2007-11-14	dr	MINI K V											dwg no	
E	108-	0146	KR	2008-10-21	chr	RAKHEE G											sheet 1 of 1	
						KESAVAN R											C-8609-2009	
						KESAVAN R											size	
						KESAVAN R											A3	
sheet index	revision	E																type
	sheet	1																Product Customer Drawing