

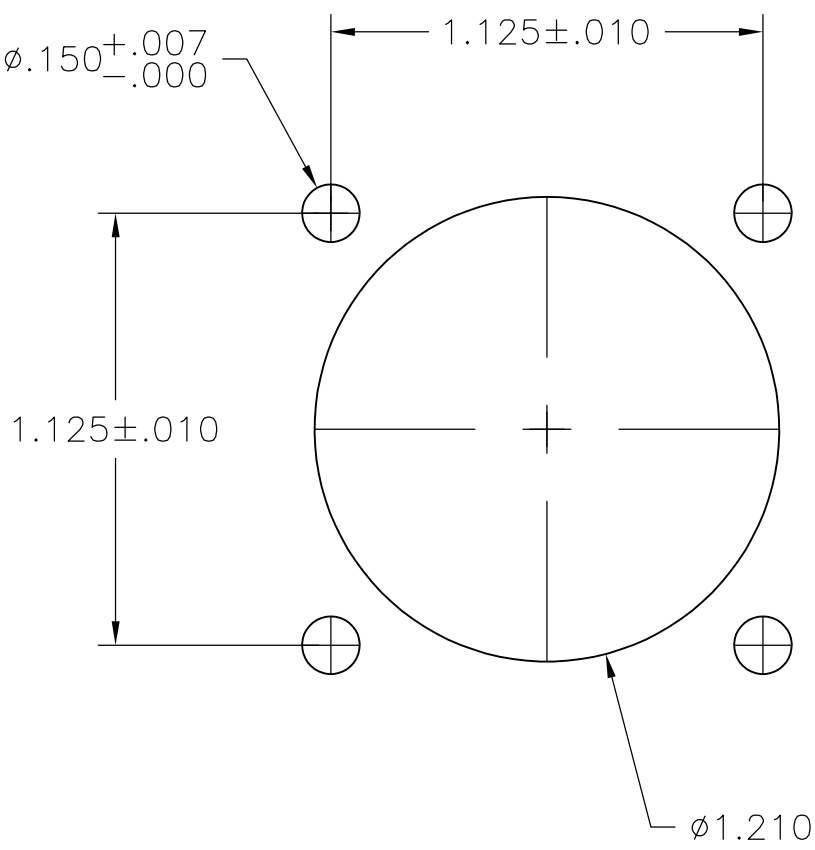
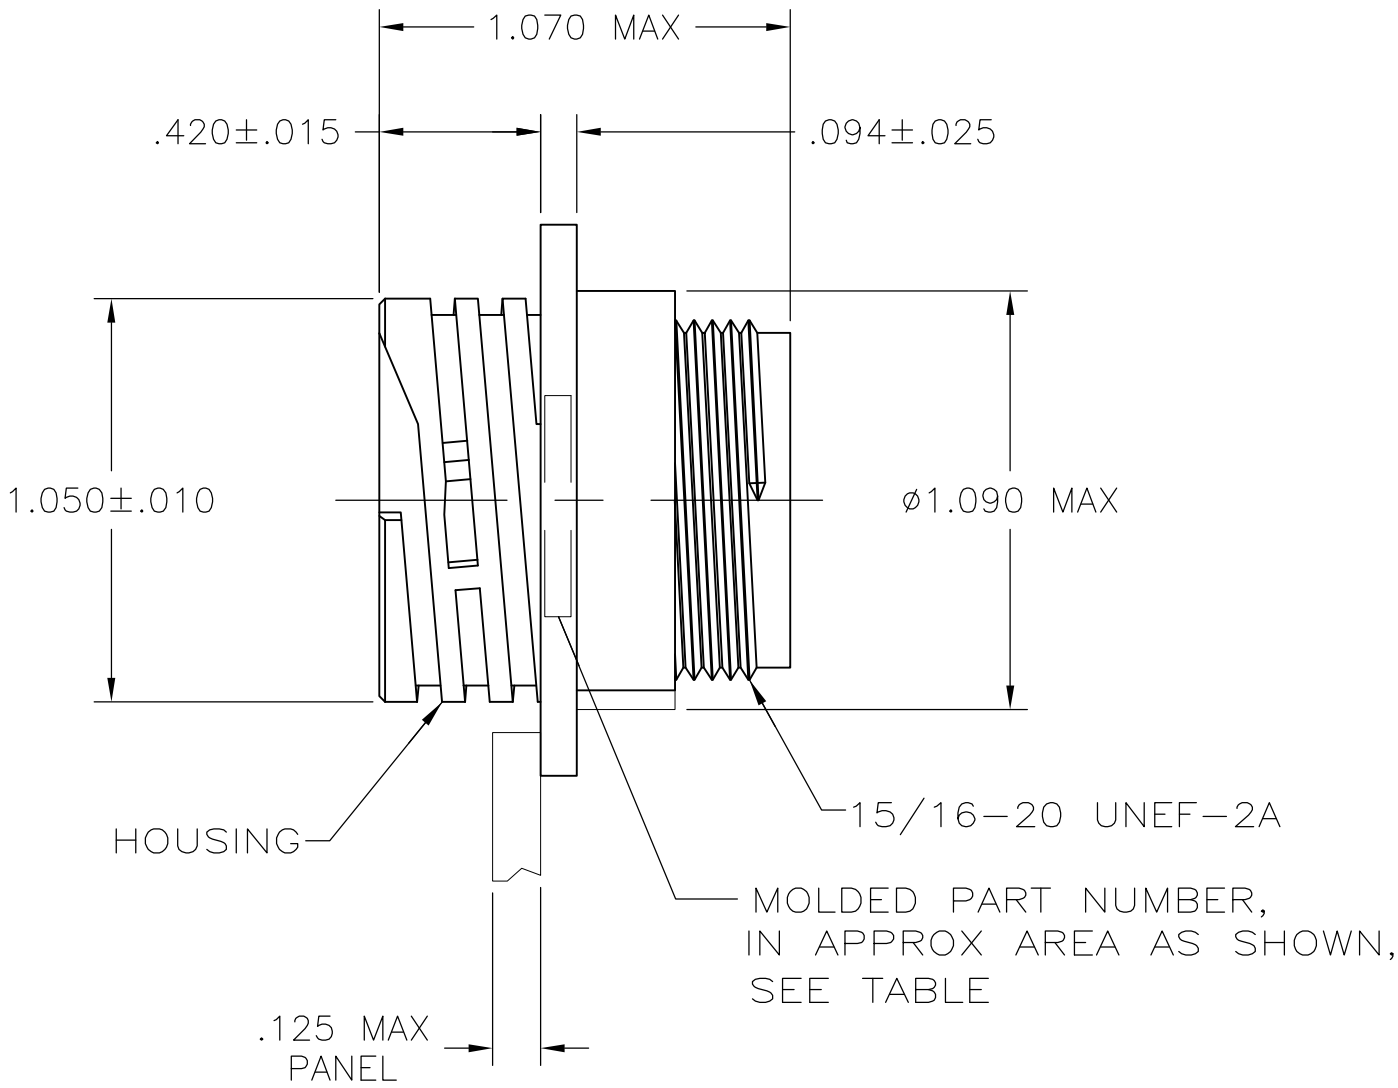
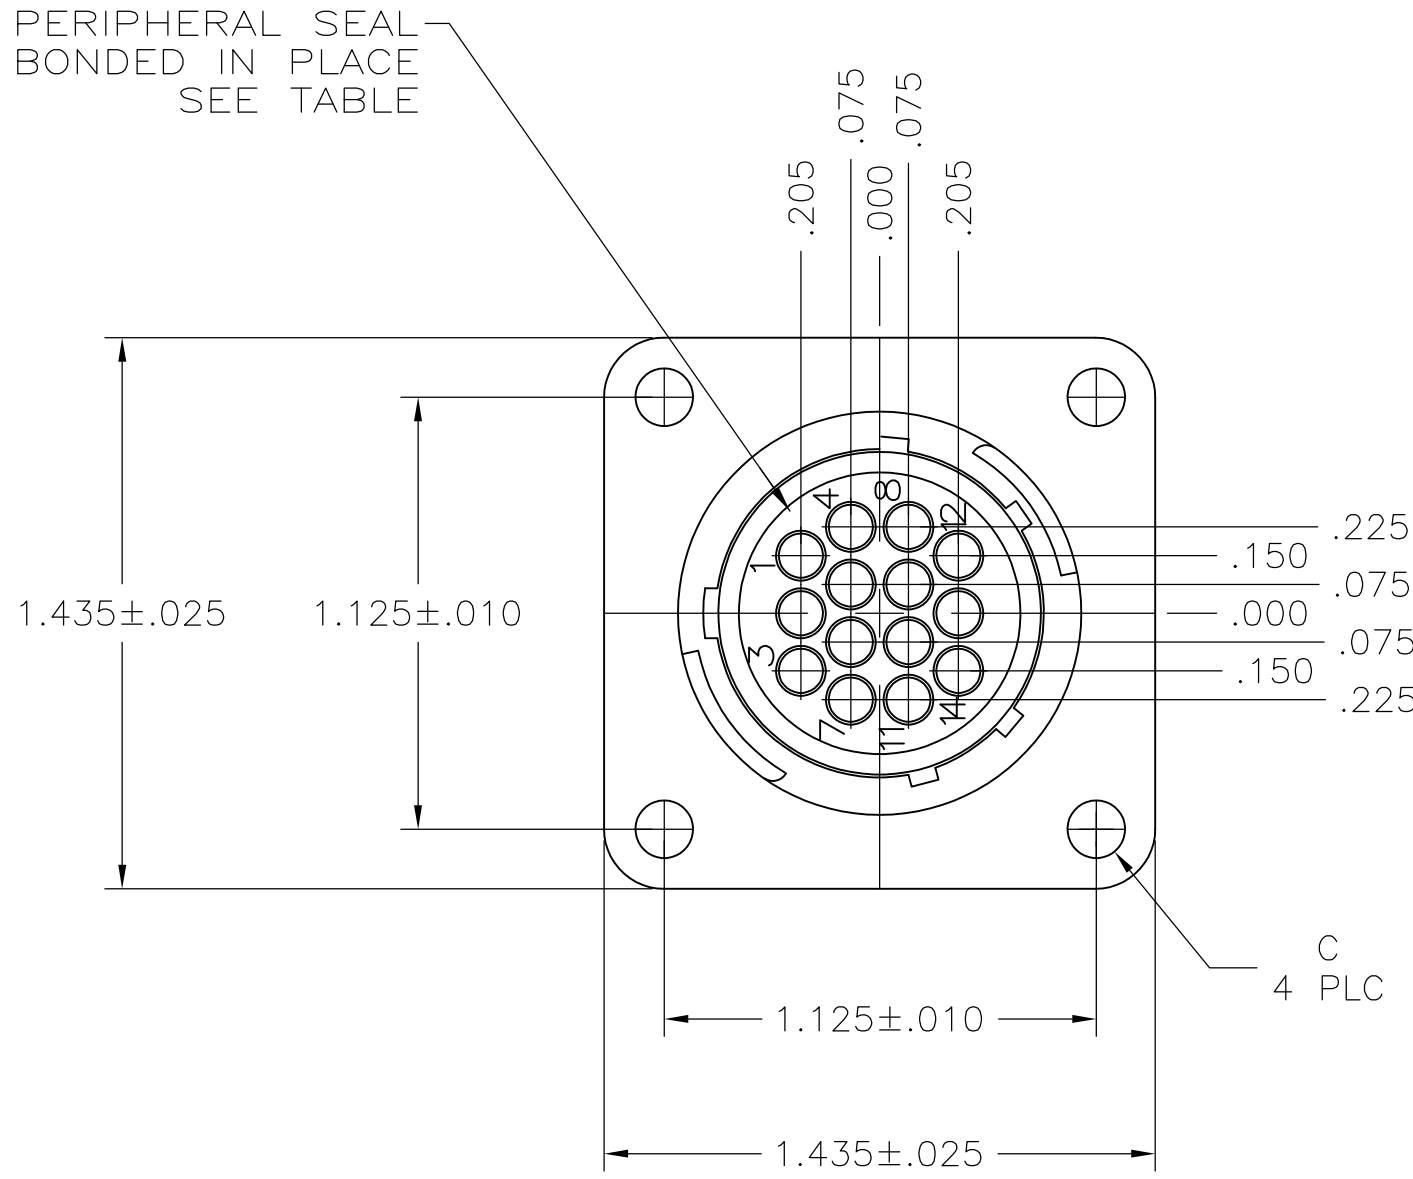


REVISIONS						
P	T	LTR	DESCRIPTION		DATE	APVD
	S		REVISED	PER ECO-12-015521	28SEP12	KH MZ
	T		REVISED	PER ECO-17-000037	10MAR2017	RS MZ

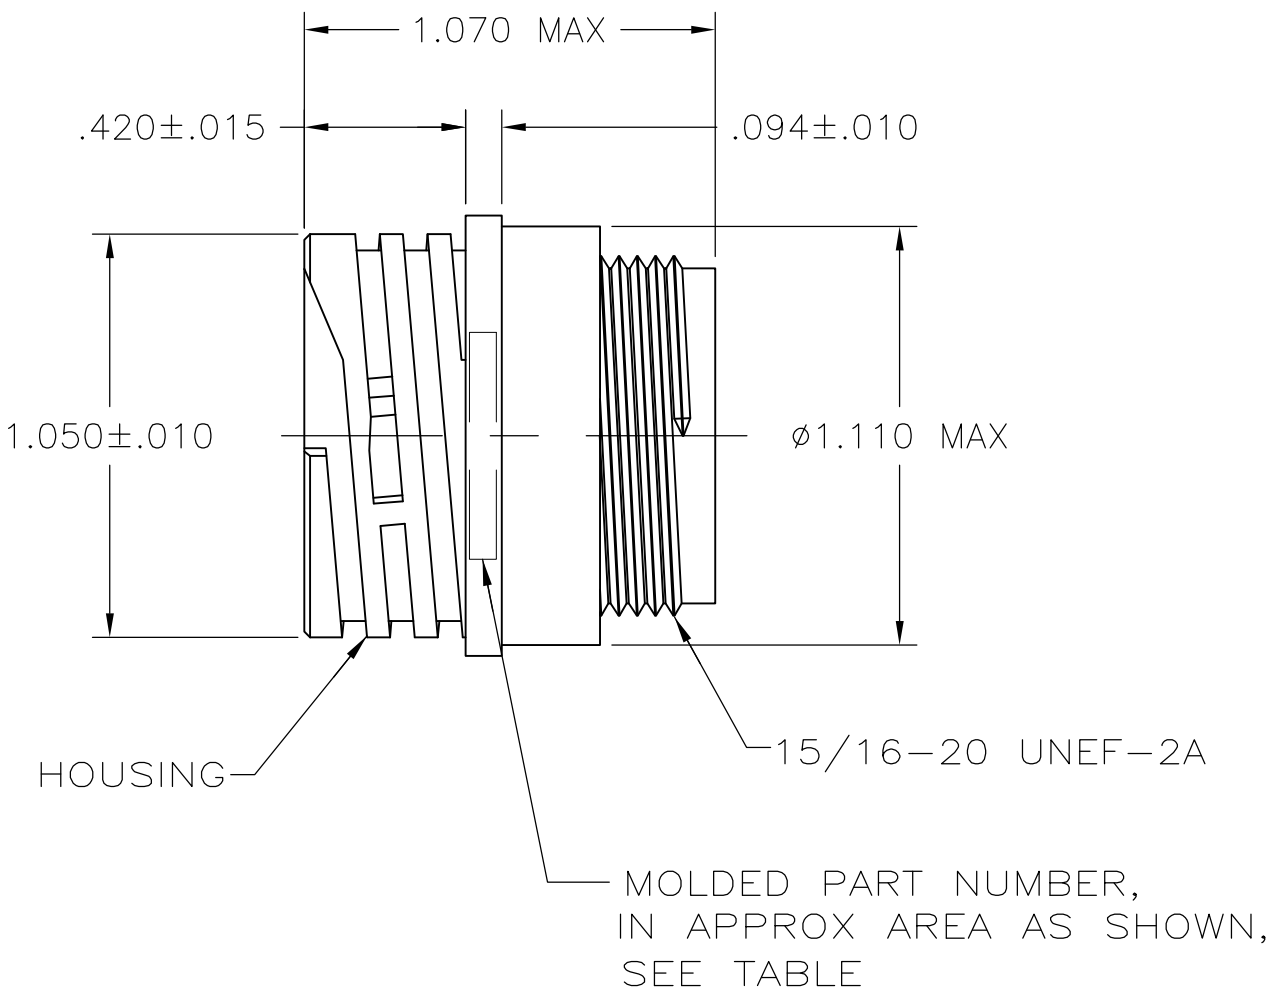

RECOMMENDED PANEL CUTOUT


DETAIL A

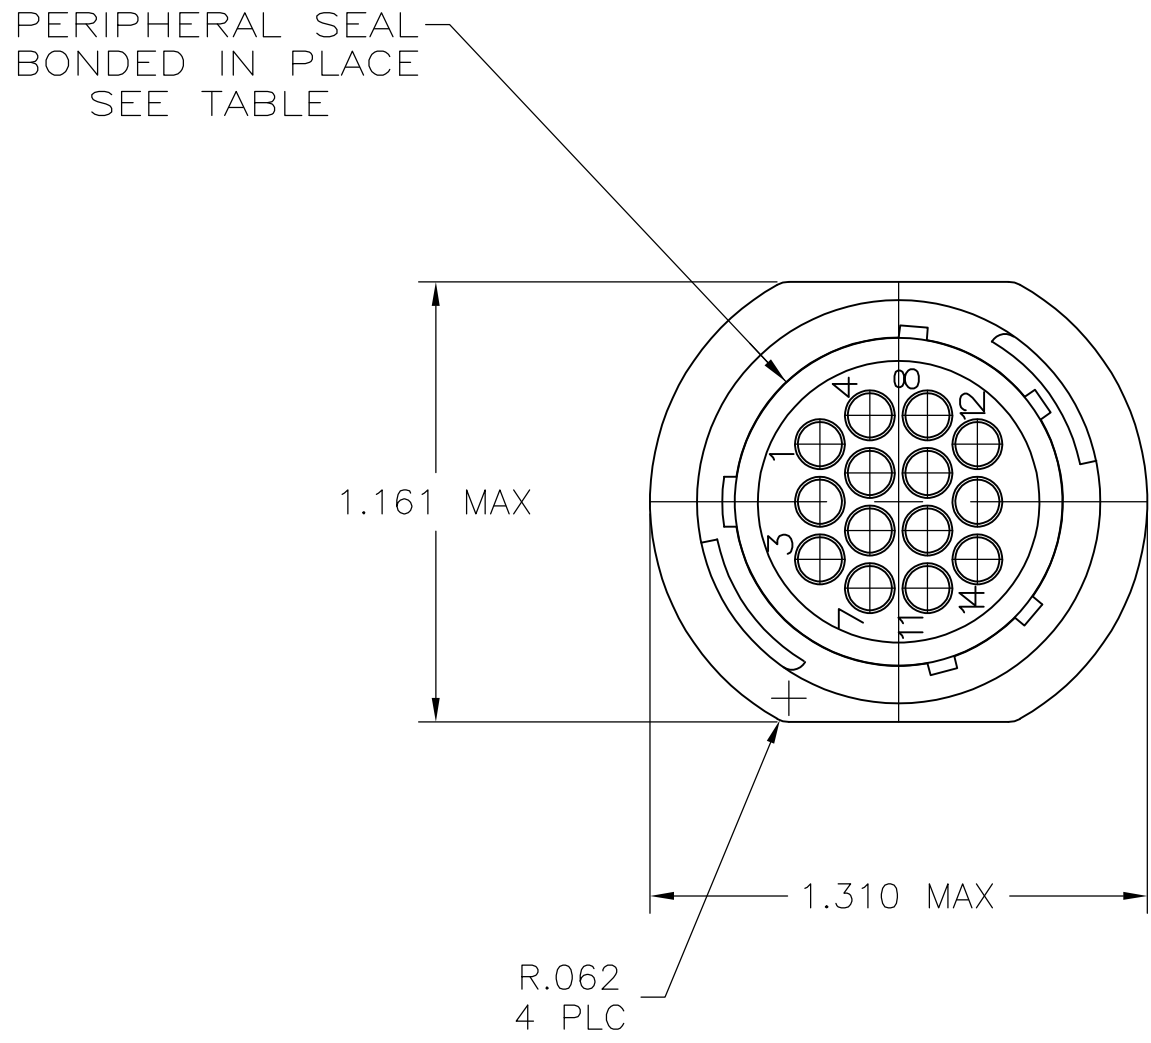

DETAIL B

- 1 CAVITY IDENTIFICATION ON FRONT AND REAR FACE.
- 2 WILL ACCEPT FOURTEEN (14) MULTIMATE SOCKET CONTACTS.

OBsolete	4-40 THREADED INSERTS	-	STANDARD	YES	A	206043-8
OBsolete	ø.150	-	SMALL PACK	NO	A	206043-6
	-	-	STANDARD	YES	B	206043-5
	ø.150	-	STANDARD	YES	A	206043-4
	-	-	STANDARD	NO	B	206043-3
	ø.150	206043-1	STANDARD	NO	A	206043-1
	DIM C	MOLDED PART NUMBER	PACKAGING	PERIPHERAL SEAL	SEE DETAIL	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN W. LENKER CHK R. STONE APVD -	09/10/92 08/11/93 -	 TE Connectivity				
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME					
		0 PLC	± -	PRODUCT SPEC			RECEPTACLE ASSEMBLY, REVERSE SEX, SERIES 1, 17-14, CPC		
		1 PLC	± -	108-10024					
		2 PLC	± 0.13 [.005]	APPLICATION SPEC					
		3 PLC	± -	WEIGHT					
		4 PLC	± -	SIZE					
MATERIAL HOUSING: NYLON BLACK		FINISH	-	-	A1	CAGE CODE 00779	DRAWING NO 206043	RESTRICTED TO	
CUSTOMER DRAWING				SCALE	2:1	SHEET	1 OF 1	REV	T