



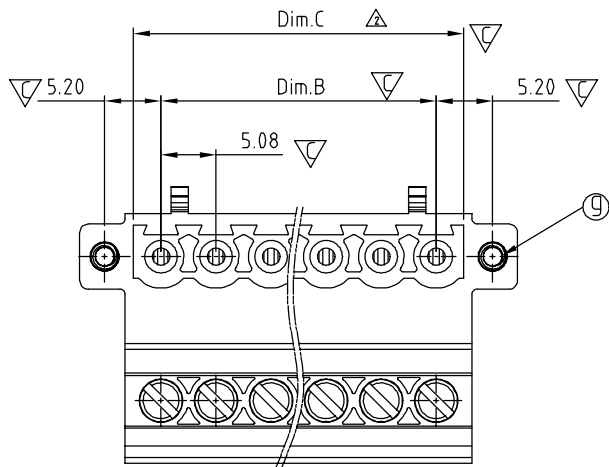


#### Dimension

|       |                           |
|-------|---------------------------|
| Dim.A | $(N-1) \times 5.08 + 6.6$ |
| Dim.B | $(N-1) \times 5.08$       |
| Dim.C | $N \times 5.08$           |

N=Number of poles

| Poles     | Tolerance  |
|-----------|------------|
| 2P - 6P   | $\pm 0.15$ |
| 7P - 12P  | $\pm 0.20$ |
| 13P - 18P | $\pm 0.30$ |
| 19P - 24P | $\pm 0.40$ |

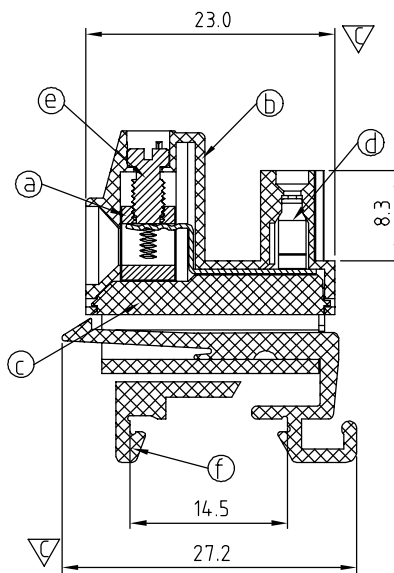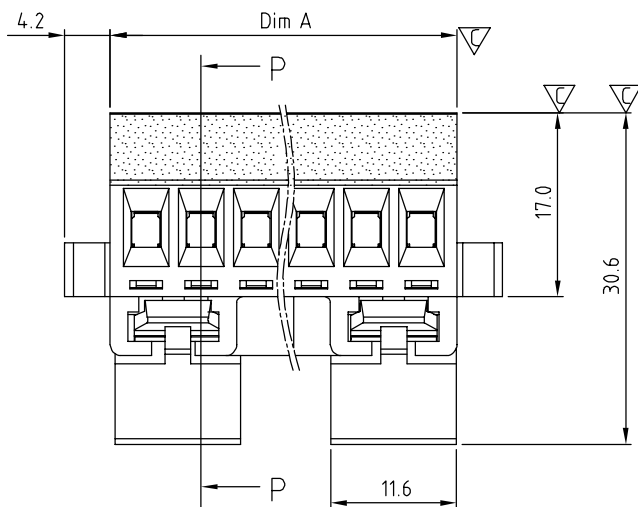

#### SECTION P-P

| SIGN | DATE     | DESCRIPTION        | APPROVER |
|------|----------|--------------------|----------|
| △    | 11/09'11 | Add is cULus       | Aaron    |
| △    | 11/09'11 | The Dim C is added | Aaron    |

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

#### Material:

- Item ① Clamp: Brass Ni plated
- Item ② Terminal (housing): Thermoplastic (UL94V-0)
- Item ③ Terminal (Cover): Thermoplastic (UL94V-0)
- Item ④ Male contact: PhBz, Tin plated.
- Item ⑤ Terminal screw: Steel Zinc plating " - " slot type
- Item ⑥ Terminal(track): Thermoplastic (UL94V-0)
- Item ⑦ With flange nut: Brass M2.5

#### Electrical: cULus

- Voltage rating: 300V
- Current rating: 12A
- Wire range:
- Solid wire(AWG):12-30
- Stranded wire(AWG):12-30
- Torque:5.2Lb-In.
- Screw:M3
- Wire strip length: 6-7 mm
- Withstanding Voltage: 1.6KV
- Operating temperature:-40°C to +115°C

△ Safety Approval: cULus

● Critical dimension: ▽

● Part No.:

V9 xx 51 x 3 xxxx G

No. OF POLES

02: 2 POLES

03: 3 POLES

...

24: 24 POLES

Color

0 Black (RAL9005)

5 Green(RAL6018/T)

6 Blue (RAL5015/A)

8 Grey(RAL7035/D)

C Green(RAL6018/U)

G: Pb<40000ppm

0000: "@" Logo (Standard)

000A: "ANYTEK" Mark

Any special item by customer request. please contact sales department.

# ANYTEK

## CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

|          |                                                                |                     |                    |              |         |             |            |
|----------|----------------------------------------------------------------|---------------------|--------------------|--------------|---------|-------------|------------|
| TITLE    | V9-5.08 mm Series 2P-24P With Flange ( Dinrail holder A type ) |                     |                    |              |         |             |            |
| PART NO. | V9xx51x3xxxxG                                                  |                     |                    | DWG NO.      | 8V90003 |             |            |
| APPROVED | CHECKED                                                        | DESIGNED            | DRAWN              | CUST NO.     |         |             |            |
|          |                                                                | Aaron<br>2011.11.09 | Tony<br>2008.01.19 |              |         | UNIT: mm    | X. ±0.50   |
|          |                                                                |                     |                    |              |         | SCALE: NONE | X.X ±0.30  |
|          |                                                                |                     |                    | SHEET: 01/01 | REV: C  |             | X.XX ±0.10 |
|          |                                                                |                     |                    |              |         |             | X° ±1°     |