


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size & Type	Stranded Copper Flex Cable; 2/0 AWG (325/24) Diesel Locomotive, 2/0 FLEX K,M Class K & Class M
Wire Strip Length	1-9/16 in.
Stud Size	1/2 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	ORANGE
Panduit Die Index No. on Barrel	P50
Alternate Industry Die Index No. ( ) on Barrel	(14)




CERTIFIED

LISTED  
Wire Connector

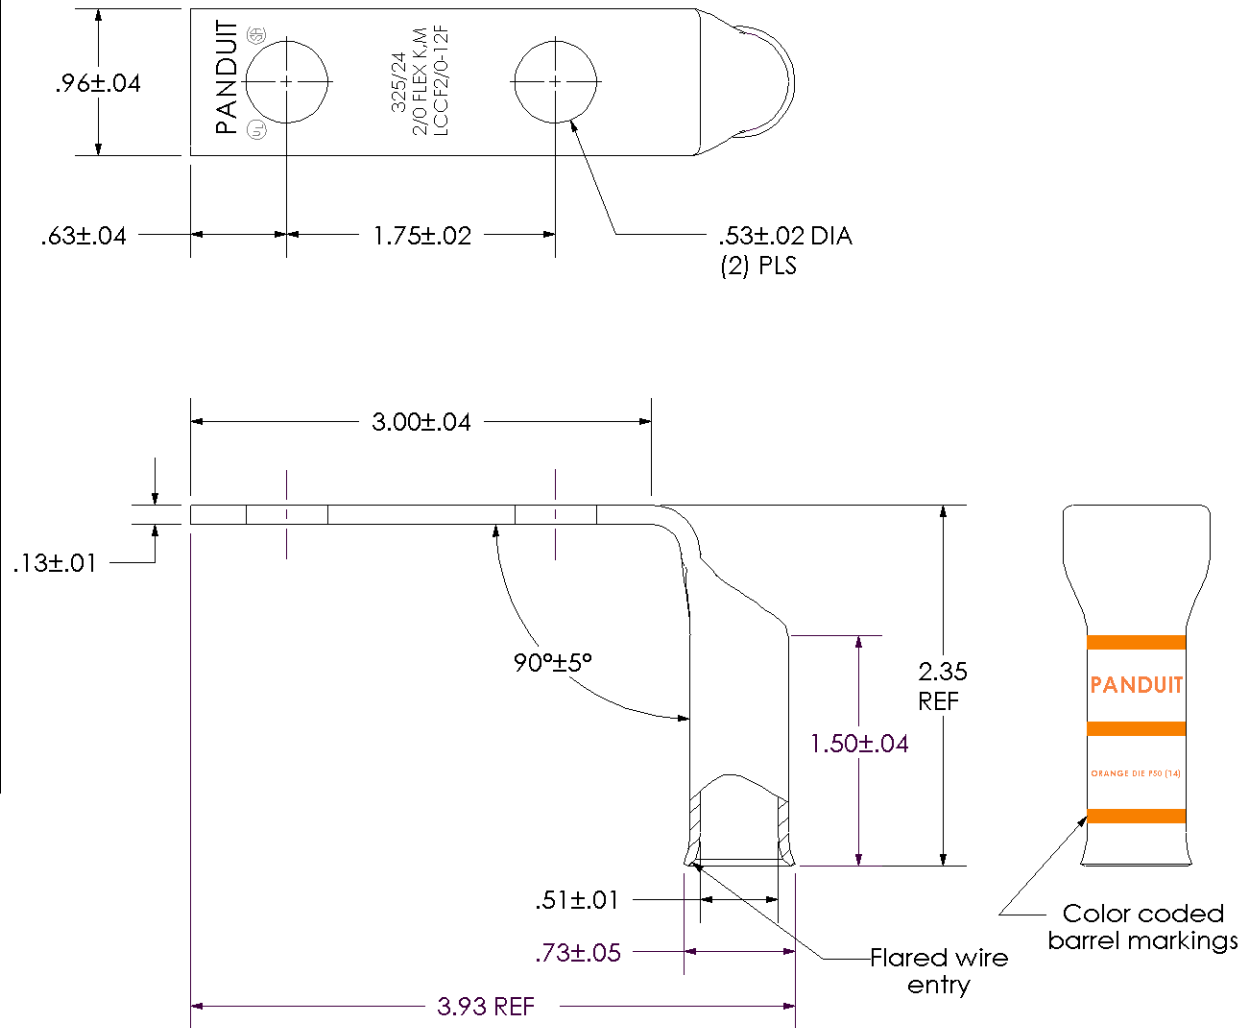

00	9/02	SAB	DRL
REV	DATE	BY	CHK

RELEASED	10338
DESCRIPTION	ECN

	 <b>PANDUIT CORP. TINLEY PARK, ILLINOIS</b>		
	LCCF2/0-12F-X Copper Lug - Two-Hole, Flared Barrel, 90° Angle Tongue		
10338			
ECN	SCALE N/A	DRAWING NO / CAD FILE	LCCF2_0-12F-CUST