




TOP VIEW

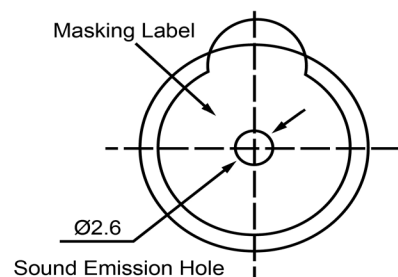

SIDE VIEW

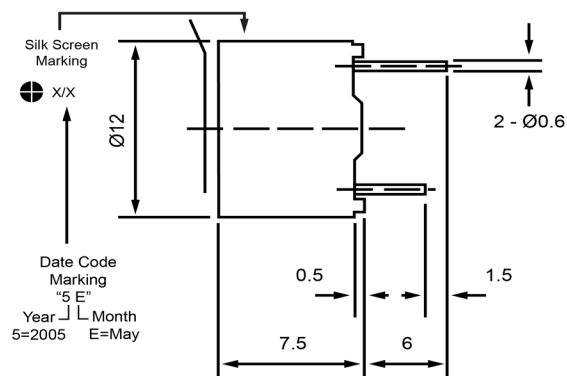

BOTTOM VIEW

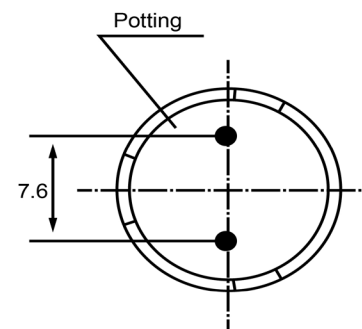

Specifications			Notes	Revision History													
Description	Value	Unit		Version	Description		Date	Approved									
Technology	Electro-Mechanical		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		10/21/2013	J.S									
Resonant Frequency	2,300	(Hz)															
Rated Voltage	12	(V)															
SPL @ 10cm	83	(dBA)															
Tone	Single Tone																
Mount Type	Thru Hole																
Voltage Range	9 ~ 15	(V)															
Max Rated Current	30	(mA)															
Housing Material	NORYL																
Operating Temperature	-20 ~ +70	°C															
Storage Temperature	-20 ~ +70	°C															
Weight	2	(g)															
				Drawn by		Date		Checked by		Date		Approved by		Date			
				A.B.				10/21/2013		C.E.		10/21/2013		J.S		10/21/2013	
				Electro-Mechanical Indicator				IE122312-1									