





REV.	DATE	DESCRIPTION
NC	08/09/01	INITIAL RELEASE

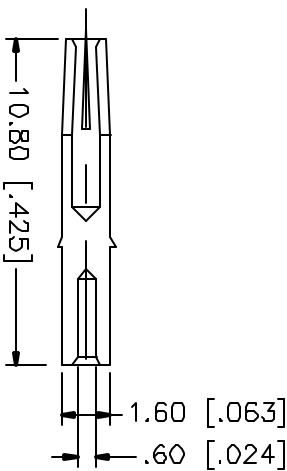

RECOMMENDED
CABLE STRIPPING DIM'S

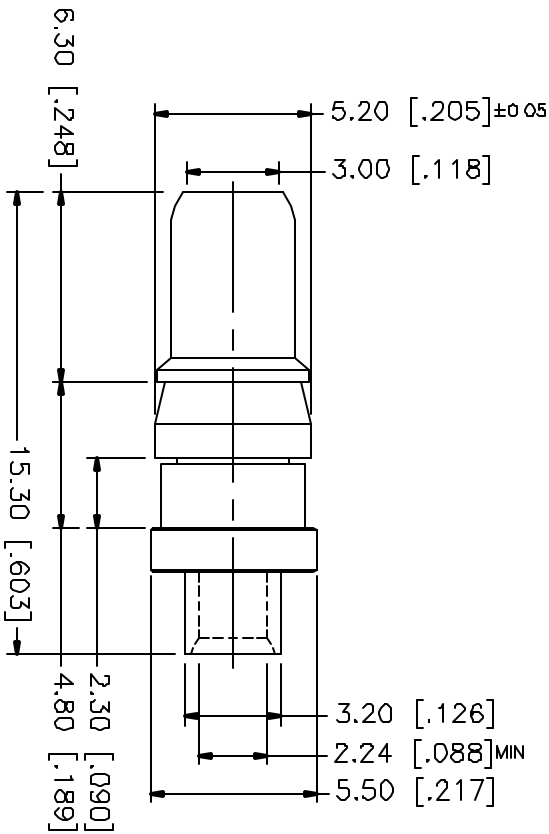

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS		APPROVALS	DATE	 D-SUB CRIMP PLUG (RG .085", .086" SEMI RIGID CABLE)					
1 BODY	BRASS	GOLD	DIMENSIONS IN [] ARE IN INCHES		DRAWN	GRS						08/09/01
2 INSULATOR	TEFLON	NATURAL	FOR CUSTOMER REFERENCE ONLY		REVISED							
3 CONTACT PIN	PHOS. BRONZE	GOLD	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE		ESLSD							
4			0.5-6 = ± 0.2									
5			6-30 = ± 0.4									
6			30-120 = ± 0.6									
7			120-315 = ± 1									
8			315-1000 = ± 1.6									
			1000-2000 = ± 2.4									
DO NOT SCALE DRAWING												

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MILLIMETERS
DIMENSIONS IN [] ARE IN INCHES
FOR CUSTOMER REFERENCE ONLY

0.5-6 = ± 0.2
6-30 = ± 0.4
30-120 = ± 0.6
120-315 = ± 1
315-1000 = ± 1.6
1000-2000 = ± 2.4

DO NOT SCALE DRAWING

SCALE NA PART NO. 212108 SHEET 1 OF 1