

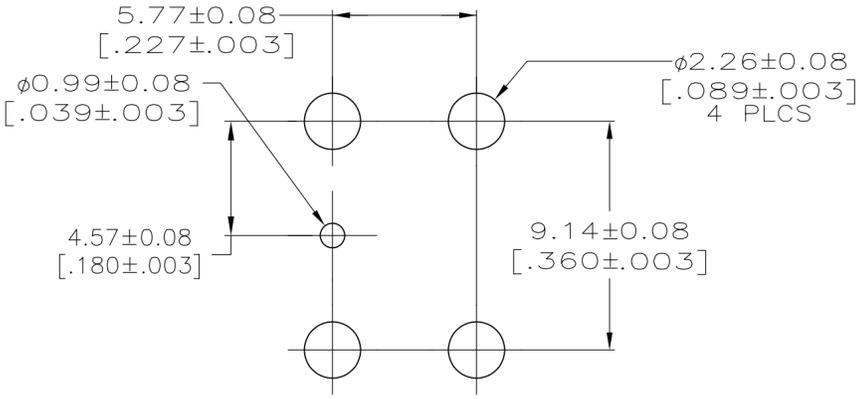


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.





LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AJ	16	REVISED PER ECO-11-014734	19JUL11	HMR	FB

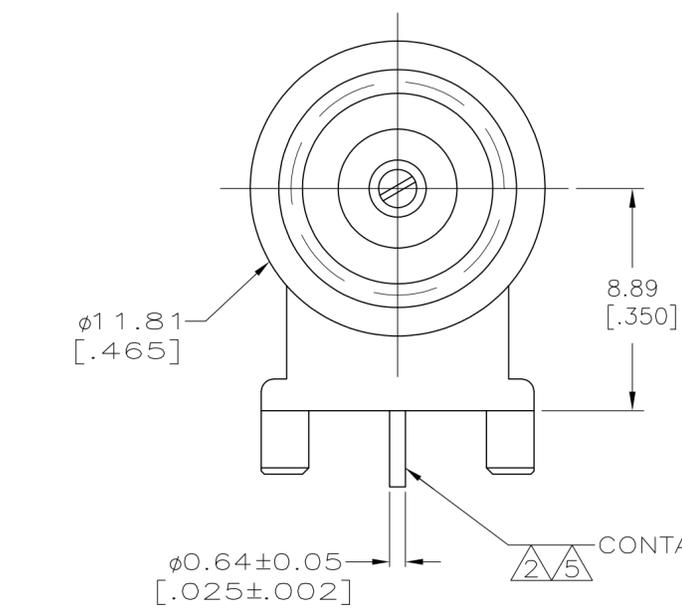

PCB CONFIGURATION

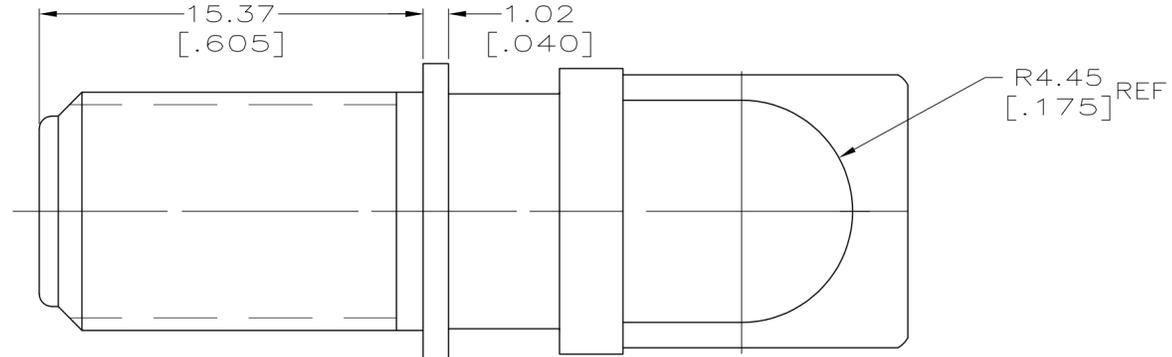

FRONT DIELECTRIC (BLACK) Δ 8
 CONTACT Δ 1/5
 MIDDLE DIELECTRIC Δ 8

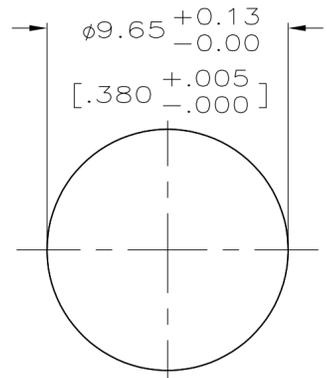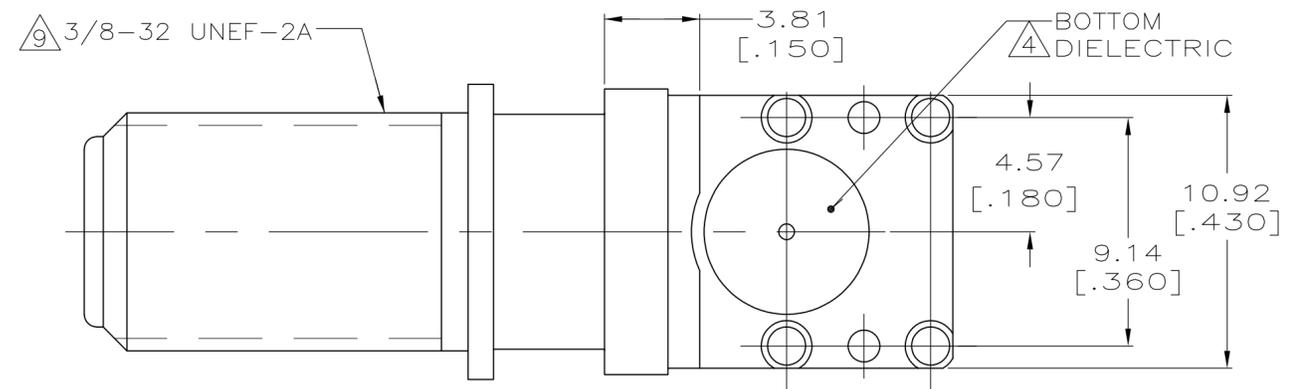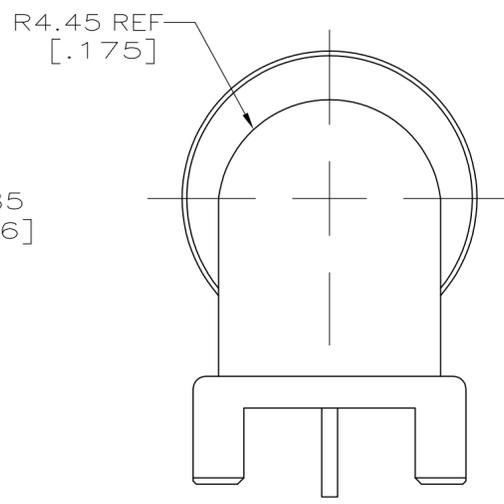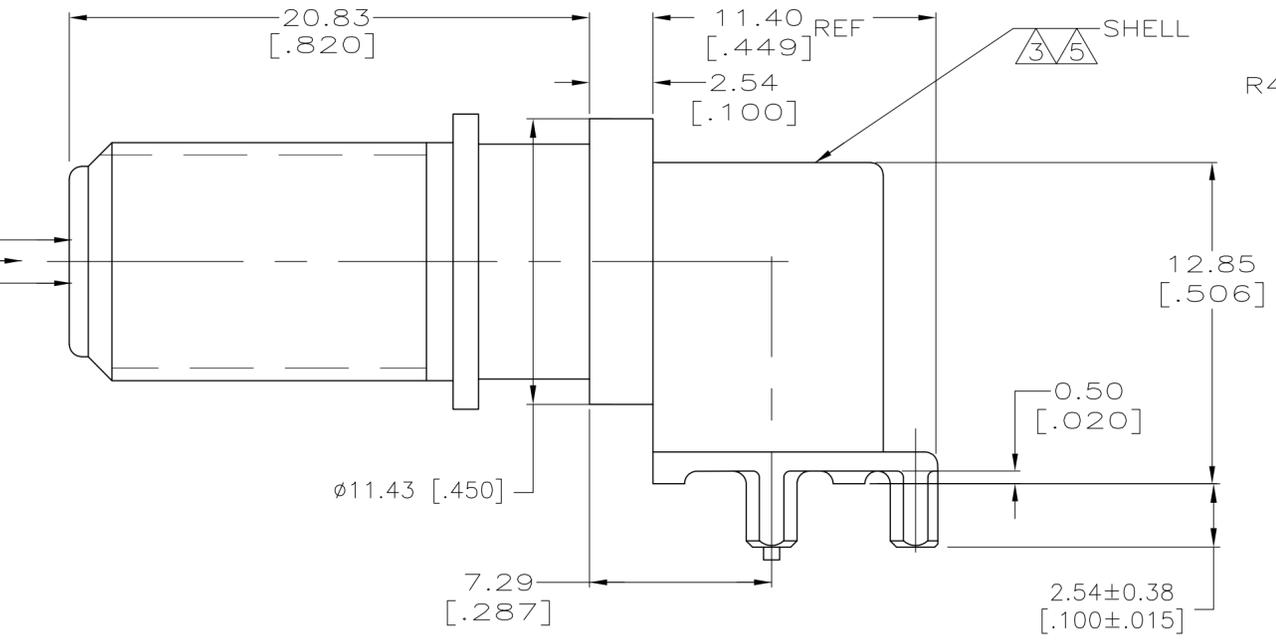

SUGGESTED PANEL CUTOUT

- Δ 1 PHOSPHOR BRONZE PER QQ-B-750.
- Δ 2 BRASS PER ASTM-B-453
- Δ 3 ZINC PER QQ-Z-363.
- Δ 4 ACETAL, GENERAL PURPOSE
- Δ 5 TIN PLATE PER ASTM-B-545, 3.81 μ m [.000150] MINIMUM THICK. NICKEL PLATE PER QQ-N-290 1.27 μ m [.000050] MINIMUM THICK.
- Δ 6 CONNECTOR WILL ACCEPT CENTER CONDUCTOR DIAMETER RANGE OF 0.56 [.022]–1.19 [.047]
- Δ 7 RETURN LOSS: -20dB MIN AT 1 GHz.
- Δ 8 POLYMETHYLPENTENE, GENERAL PURPOSE.
- Δ 9 MAJOR DIA MODIFIED TO .365 REF.

6274430-1
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L.VARELA - DOCK5 02FEB2005		
DIMENSIONS: mm [INCHES]		CHK J. HAVENER 02FEB2005		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD K. WEIDNER 02FEB2005	NAME	
0 PLC ± -	1 PLC ± -	PRODUCT SPEC	108-1800	
2 PLC ± -	3 PLC ± 0.20 [.008]	APPLICATION SPEC	-	
4 PLC ± -	ANGLES ± -	WEIGHT	-	
MATERIAL	FINISH	CUSTOMER DRAWING	SIZE A2	CAGE CODE 00779
			DRAWING NO C=6274430	RESTRICTED TO
			SCALE 5:1	SHEET 1 of 1
			REV A	