

SEE DETAIL A

END P1
Mini SAS 2.0/SATA
CABLE CONNECTOR


END P2
Mini SAS 2.0/SATA
CABLE CONNECTOR

PULL TAB



EMI GASKET
(HOLLOW STRUCTURE)
F

KEYWAY


ADD DUST COVER(NATURE COLOR)
ON EACH MINI-SAS CONNECTOR
WHEN PACKAGE FOR SHIPMENT

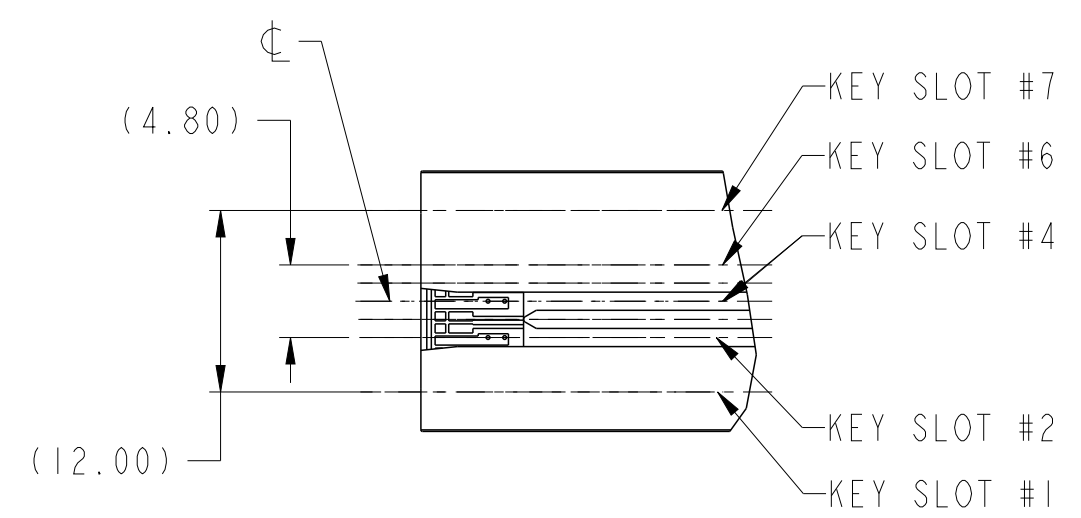


DETAIL A
KEY SLOTS #2 & #4 SHOWN
SCALE 2:1

spec ref				---		dr		Deborah Ingram		2010/09/01		projection						size		A3		scale		1:1	
tolerance std				TOLERANCES UNLESS OTHERWISE SPECIFIED		eng		Tom Feng		2014/09/23						ecn no		ELX-N-18515-1		rel level		Released			
---				chr		-		-																	
---				appr		Delhly Liu		2014/09/24		product family														C&A	
surface		✓		linear		0.X		±0.3				title		FINAL ASSEMBLY - STANDARD		dwg no		10115796		rev		G			
				0.XX		±0.10																			
				0.XXX		±0.050																			
---		angular		0°		±2°		www.fci.com		cat. no.		-		Product - Customer Drw		sheet 1 of 6									


MINI SAS 2.0							
PRODUCT NUMBER SEE NOTE 4	HUAWEI PART NUMBER	DESCRIPTION	GAUGE	"DIM L" LENGTH	END P1 KEY SLOT	END P2 KEY SLOT	IDENTIFIER
10115796-M060002LF	/	X4 SAS CABLE ASSEMBLY	24 AWG	6M	4, 6	4, 6	SUBTRACTIVE ROUTING (IN PORT), SAS
10115796-N040002LF	/	X4 SAS CABLE ASSEMBLY	26 AWG	4M	4, 6	4, 6	
10115796-N050002LF	/	X4 SAS CABLE ASSEMBLY	26 AWG	5M	4, 6	4, 6	
10115796-P010002LF	/	X4 SAS CABLE ASSEMBLY	28 AWG	1M	4, 6	4, 6	
10115796-P020002LF	/	X4 SAS CABLE ASSEMBLY	28 AWG	2M	4, 6	4, 6	
10115796-P030002LF	/	X4 SAS CABLE ASSEMBLY	28 AWG	3M	4, 6	4, 6	
10115796-M060003LF	/	X4 SAS CABLE ASSEMBLY	24 AWG	6M	2, 4, 6	2, 4, 6	UNIVERSAL KEY, SAS
10115796-N040003LF	/	X4 SAS CABLE ASSEMBLY	26 AWG	4M	2, 4, 6	2, 4, 6	
10115796-N050003LF	/	X4 SAS CABLE ASSEMBLY	26 AWG	5M	2, 4, 6	2, 4, 6	
10115796-P003803LF	/	X4 SAS CABLE ASSEMBLY	28 AWG	0.38M	2, 4, 6	2, 4, 6	
10115796-P004003LF	/	X4 SAS CABLE ASSEMBLY	28 AWG	0.4M	2, 4, 6	2, 4, 6	
10115796-P004603LF	/	X4 SAS CABLE ASSEMBLY	28 AWG	0.46M	2, 4, 6	2, 4, 6	
10115796-P004803LF	/	X4 SAS CABLE ASSEMBLY	28 AWG	0.48M	2, 4, 6	2, 4, 6	
10115796-P005003LF	/	X4 SAS CABLE ASSEMBLY	28 AWG	0.5M	2, 4, 6	2, 4, 6	
10115796-P010003LF	0405G002	X4 SAS CABLE ASSEMBLY	28 AWG	1M	2, 4, 6	2, 4, 6	
10115796-P015003LF	/	X4 SAS CABLE ASSEMBLY	28 AWG	1.5M	2, 4, 6	2, 4, 6	
10115796-P020003LF	/	X4 SAS CABLE ASSEMBLY	28 AWG	2M	2, 4, 6	2, 4, 6	
10115796-P025003LF	/	X4 SAS CABLE ASSEMBLY	28 AWG	2.5M	2, 4, 6	2, 4, 6	
10115796-P030003LF	0405G004	X4 SAS CABLE ASSEMBLY	28 AWG	3M	2, 4, 6	2, 4, 6	
10115796-M060006LF	/	X4 SAS CABLE ASSEMBLY	24 AWG	6M	2, 4	4, 6	SAS, TABLE ROUTING (OUT PORT), TO SUBTRACTIVE ROUTING (IN PORT)
10115796-N040006LF	/	X4 SAS CABLE ASSEMBLY	26 AWG	4M	2, 4	4, 6	
10115796-N050006LF	/	X4 SAS CABLE ASSEMBLY	26 AWG	5M	2, 4	4, 6	
10115796-P007106LF	/	X4 SAS CABLE ASSEMBLY	28 AWG	0.71M	2, 4	4, 6	
10115796-P010006LF	/	X4 SAS CABLE ASSEMBLY	28 AWG	1M	2, 4	4, 6	
10115796-P015006LF	/	X4 SAS CABLE ASSEMBLY	28 AWG	1.5M	2, 4	4, 6	
10115796-P020006LF	/	X4 SAS CABLE ASSEMBLY	28 AWG	2M	2, 4	4, 6	
10115796-P030006LF	/	X4 SAS CABLE ASSEMBLY	28 AWG	3M	2, 4	4, 6	

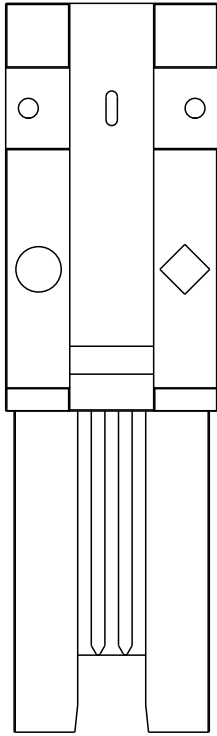

KEY SLOT 2, 4 & 6
○◇ UNIVERSAL PORT

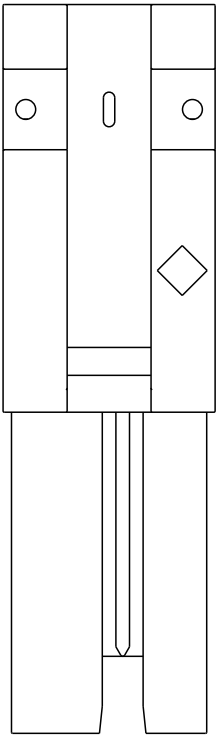

KEY SLOT 2 & 4
◇ OUT PORT

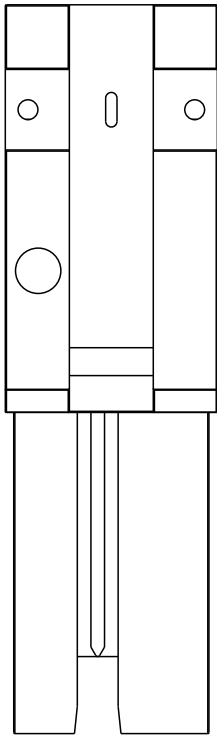


KEY SLOT 4 & 6
○ IN PORT

MINI SAS 2.0 KEYING OPTIONS

spec ref		---		dr		Deborah Ingram		2010/09/01		projection		MM		size		A3		scale		1:1															
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng		Tom Feng		2014/09/23						ecn no		ELX-N-18515-1																			
chr				-		-																													
---				appr		Delhly Liu		2014/09/24		product family										C&A		rel level		Released											
surface				linear		0.X		±0.3				title										FINAL ASSEMBLY - STANDARD		dwg no		10115796		rev		G					
																																0.XX		±0.10	
																																0.XXX		±0.050	
---		angular		0°		±2°		www.fci.com		cat. no.		-		Product - Customer Drw										sheet 2 of 6											


SATA

PRODUCT NUMBER SEE NOTE 4	DESCRIPTION	GAUGE	"DIM L" LENGTH	END P1 KEY SLOT	END P2 KEY SLOT	IDENTIFIER
10115796-M060004LF	X4 SATA CABLE ASSEMBLY	24 AWG	6M	1,4	1,4	X CABLE, SATA
10115796-N020004LF	X4 SATA CABLE ASSEMBLY	26 AWG	2M	1,4	1,4	
10115796-N040004LF	X4 SATA CABLE ASSEMBLY	26 AWG	4M	1,4	1,4	
10115796-N050004LF	X4 SATA CABLE ASSEMBLY	26 AWG	5M	1,4	1,4	
10115796-P010004LF	X4 SATA CABLE ASSEMBLY	28 AWG	1M	1,4	1,4	
10115796-P030004LF	X4 SATA CABLE ASSEMBLY	28 AWG	3M	1,4	1,4	
10115796-M060005LF	X4 SATA CABLE ASSEMBLY	24 AWG	6M	7	7	M CABLE, SATA
10115796-N020005LF	X4 SATA CABLE ASSEMBLY	26 AWG	2M	7	7	
10115796-N040005LF	X4 SATA CABLE ASSEMBLY	26 AWG	4M	7	7	
10115796-N050005LF	X4 SATA CABLE ASSEMBLY	26 AWG	5M	7	7	
10115796-P010005LF	X4 SATA CABLE ASSEMBLY	28 AWG	1M	7	7	
10115796-P030005LF	X4 SATA CABLE ASSEMBLY	28 AWG	3M	7	7	

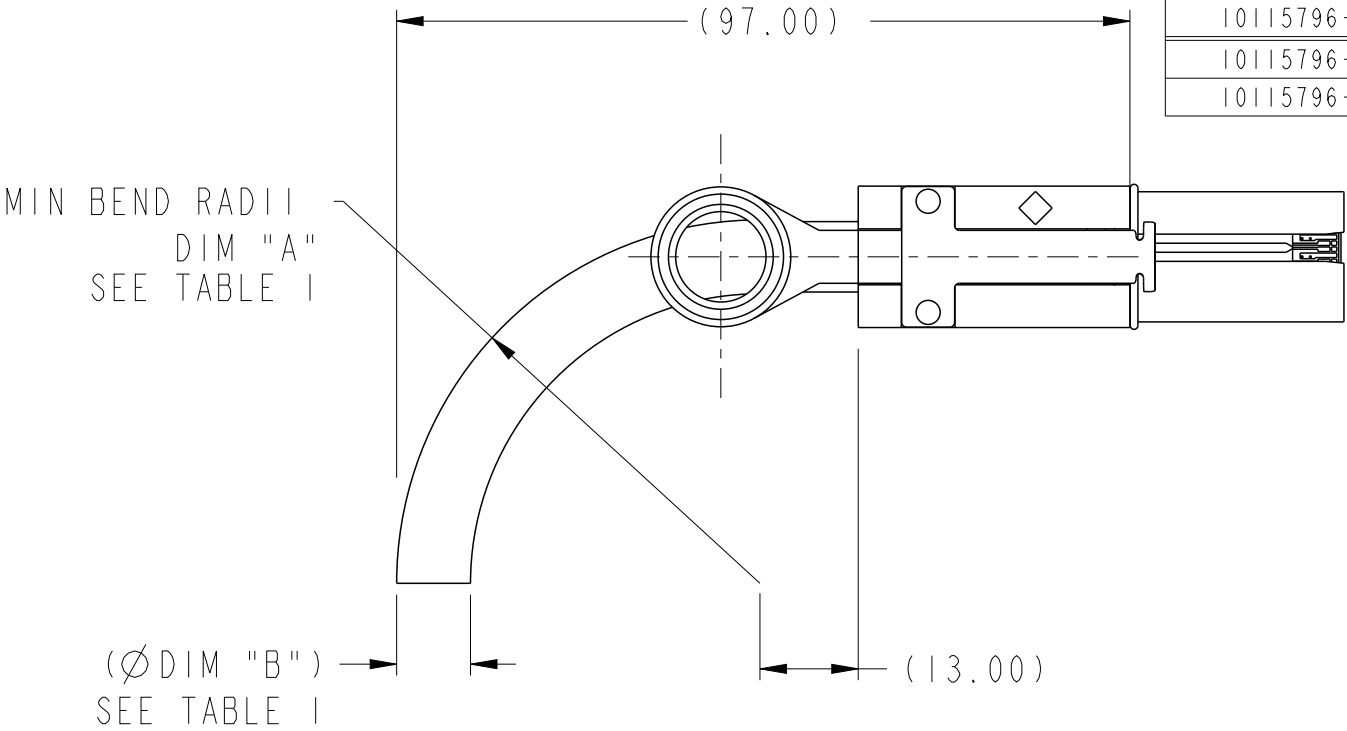


BEND RADIUS
(24 AWG SHOWN)

TABLE 1		
CABLE	DIM "A"	DIM "B"
24 AWG	TBD	TBD
26 AWG	TBD	TBD
28 AWG	TBD	TBD

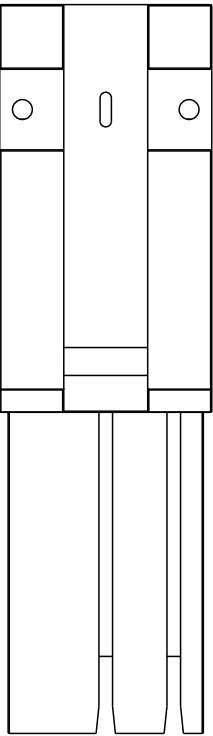

KEY SLOT 1 & 4
X CABLE, SATA

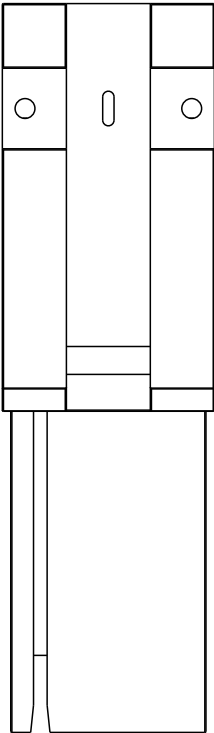

KEY SLOT 7
M CABLE, SATA

SATA KEYING OPTIONS

spec ref ---				dr Deborah Ingram		2010/09/01		projection		MM		size A3		scale 1:1			
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng Tom Feng		2014/09/23				ecn no ELX-N-18515-1					
---						chr -		-									
---						appr Delhly Liu		2014/09/24				product family C&A					
surface - ✓		linear		0.X ±0.3		0.XX ±0.10		0.XXX ±0.050				title FINAL ASSEMBLY - STANDARD		dwg no 10115796		rev G	
---		angular		0° ±2°		www.fci.com		cat. no. -		Product - Customer Drw				sheet 3 of 6			



Copyright FCI.

NOTES:

- 1 - MATERIAL:
BACKSHELLS: ZINC DIECAST
PULL TAB: MOLDED THERMOPLASTIC
LATCH: STAINLESS STEEL
JET MELT: POLYAMIDE POLYMER
- 2 - ELECTRICAL PERFORMANCE PER CURRENT REVISION
OF SERIAL ATA, T10/I760-D (SAS-2 REQUIREMENTS).
- ③ - THIS PRODUCT MEETS THE RESTRICTION OF HAZARDOUS SUBSTANCES IN
ELECTRICAL AND ELECTRONIC EQUIPMENT (RoHS) DIRECTIVE (2011/65/EU)

4 - PART NUMBER DESCRIPTION

10115796 - X XX XX XX LF

LEAD FREE (SEE NOTE 3 AND 10)

KEY SLOT
01: KEY SLOT 2,4
02: KEY SLOT 4,6
03: KEY SLOT 2,4,6
04: KEY SLOT 1,4
05: KEY SLOT 7
06: P1= KEY SLOT 2,4 P2= KEY SLOT 4,6

LENGTH
XX= METERS, XX=CENTIMETERS
0100 = 01 METERS, 00 CENTIMETERS ("DIM L")


GAUGE
M: 24 AWG
N: 26 AWG
P: 28 AWG

- ⑤ - UNLESS OTHERWISE SPECIFIED ASSEMBLED LENGTH TOLERANCE IS TO BE:
< 1 METER = ±25.0mm
>= 1 METER TO 6 METERS = ± 2% OF "DIM L"


spec ref ---				dr Deborah Ingram		2010/09/01		projection 	MM 	size A3	scale 1:1
tolerance std --- TOLERANCES UNLESS OTHERWISE SPECIFIED				eng Tom Feng		2014/09/23				ecn no ELX-N-18515-1	
---				chr -		-				rel level Released	
---				appr Delhly Liu		2014/09/24		product family C&A		rel level Released	
surface - ✓ ---	linear	0.X	±0.3		title FINAL ASSEMBLY - STANDARD Mini SAS 2.0/SATA				dwg no 10115796	rev G	
		0.XX	±0.10								
		0.XXX	±0.050								
	angular	0°	±2°	www.fci.com	cat. no. -		Product - Customer Drw			sheet 5 of 6	

NOTES CONTINUED:


- ⑥ - UNLESS OTHERWISE SPECIFIED LABEL POSITION IS TO BE 100mm FROM REAR OF CONNECTOR.
LABEL DETAILS:

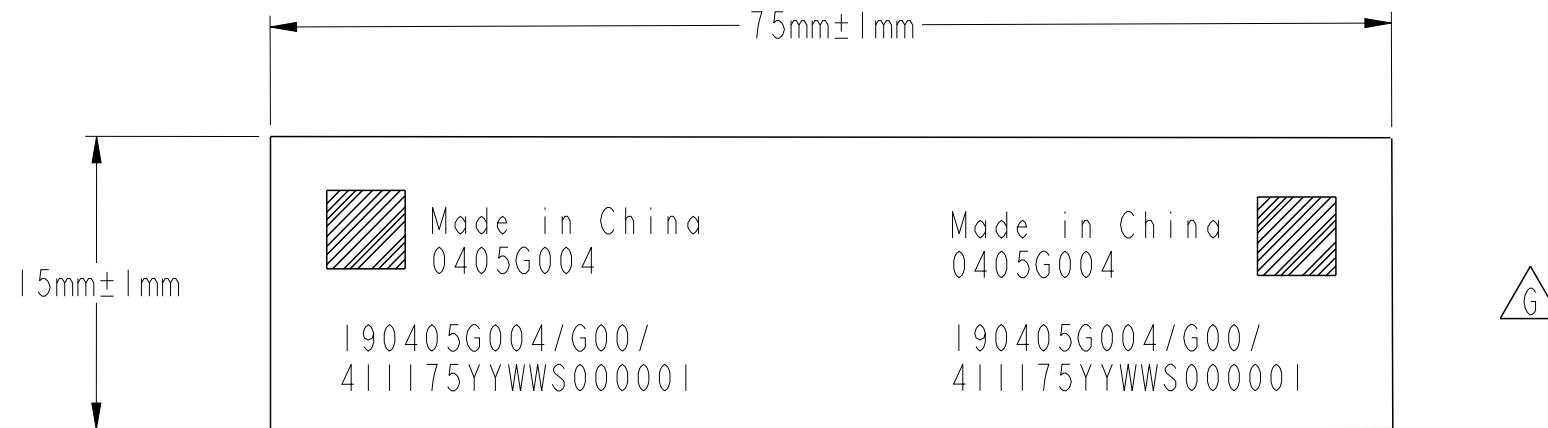

- ⑦ - ALL CABLE ASSEMBLIES SHALL BE 100% TESTED FOR CONTINUITY AS DEFINED IN WIRING LIST.
- 8 - UNLESS OTHERWISE SPECIFIED ALL CABLE ASSEMBLIES SHALL BE 100% HI-POT TESTED BY APPLYING 300V DC FOR A MINIMUM OF 10ms, UNLESS ACTIVE COMPONENTS ARE USED IN THIS ASSEMBLY.
- 9 - OTHER TESTING PERFORMED AS REQUIRED BY PRODUCT SPECIFICATION: GS-12-548.
- 10 - PACKAGING OF LEAD FREE PRODUCTS MEETS LABELING AND PACKAGING PER SPECIFICATION GS-14-920. PACKAGE CABLE ASSEMBLIES PER GS-14-1272. ADD DUST COVER ON MINI-SAS CONNECTOR WHEN PACKAGE FOR SHIPMENT. NEED STICK BELOW LABEL ON PE BAG.

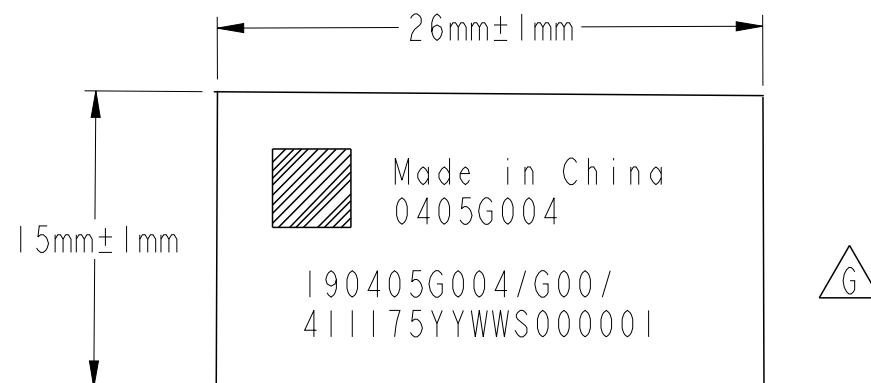

11. THIS DIMENSION IS A FINISHED PRODUCT LENGTH.

spec ref		---		dr		Deborah Ingram		2010/09/01		projection						MM		size		A3		scale		1:1					
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Tom Feng		2014/09/23		chr		-		-		ecn no		ELX-N-18515-1									
---						appr		Delhy Liu		2014/09/24		product family						C&A		rel level				Released					
surface		- ✓		linear		0.X		±0.3		FCI		title		FINAL ASSEMBLY - STANDARD						dwg no		10115796				rev		G	
						0.XX		±0.10						Mini SAS 2.0/SATA															
						0.XXX		±0.050																					
---				angular		0°		±2°		www.fci.com		cat. no.		-		Product - Customer Drw						sheet 6 of 6							