

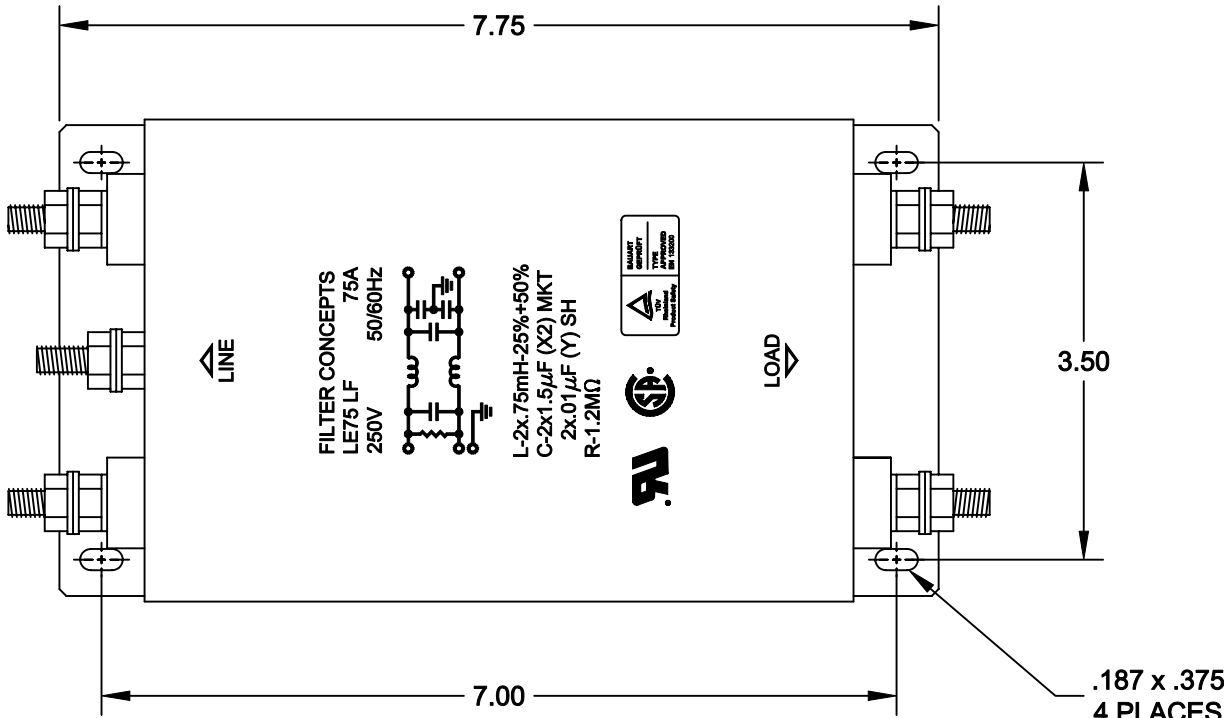
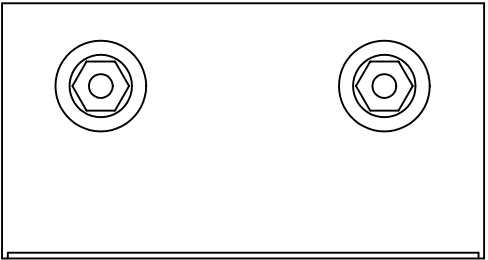


SPECIFICATIONS

- 1. CASE:
18 GA. (.048) CRS, TIN PLATED
- 2. RATED CURRENT:
75A
- 3. RATED VOLTAGE:
250VAC, 50/60Hz
- 4. TEST VOLTAGE:
LINE TO LINE: 1.7KVDC
LINE TO GROUND: 2.2KVDC
- 5. LEAKAGE CURRENT:
1.2mA MAX. @ 250VAC, 50Hz

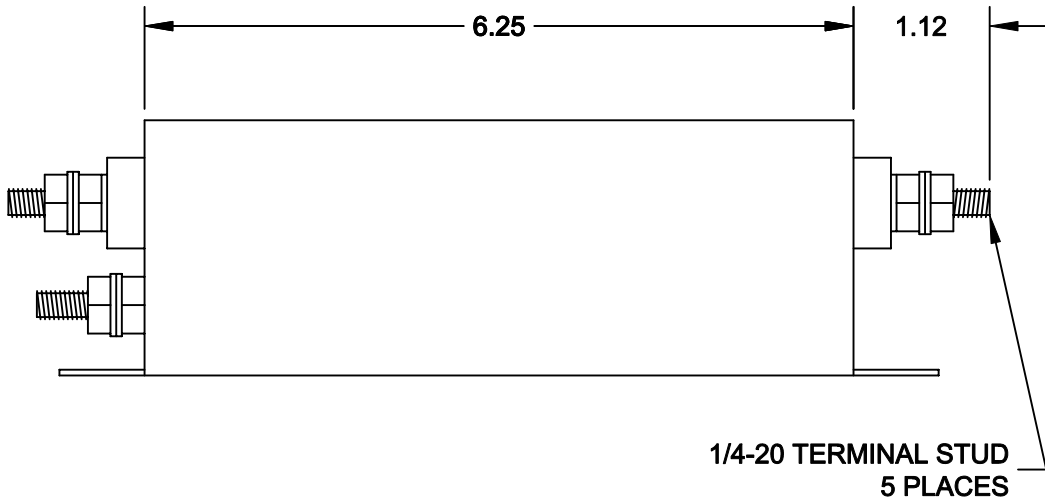


REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10-01-02	LE
B	REVISED MARKING	04-24-03	LE

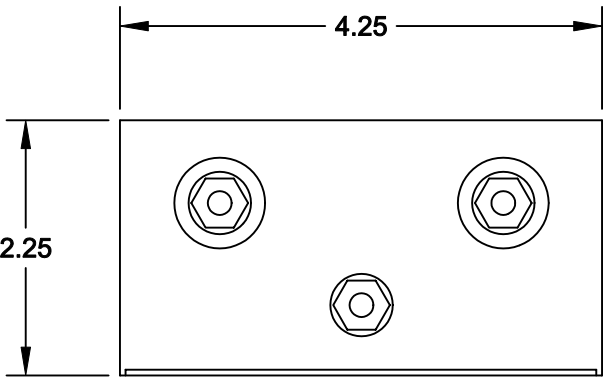

INSERTION LOSS (50Ω TYPICAL)

	.05 MHz	.15 MHz	.50 MHz	1.5 MHz	5.0 MHz	20 MHz
L/L	20 db	40 db	60 db	65 db	65 db	60 db
L/G	6 db	18 db	32 db	40 db	45 db	50 db

SCHEMATIC

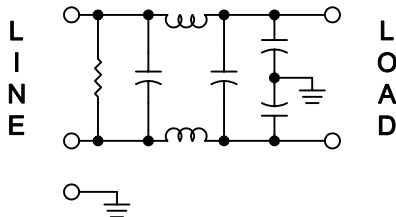

NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ±.030 ± .XXX ±.010	CONTRACT NO.		FILTER CONCEPTS INC.		
	APPROVALS	DATE			
	DRAWN GIANG TRINH	08-19-02	APPLICATION DRAWING LE75 LF FILTER		
	CHECKED DANNIEL VUONG	10-01-02			
	FINISH		SIZE B	CODE IDENT NO.	DRAWING NO. 7512
			SCALE 3/5	SHEET 1	OF 1