
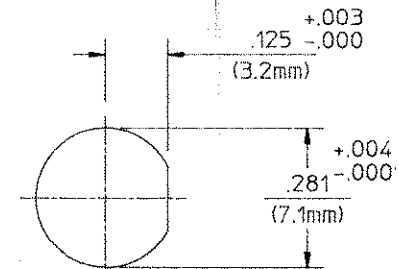


REV		REVISIONS DESCRIPTION	DATE	APPROVED
01	0	RELEASED	3-7-89	<i>LPB</i>

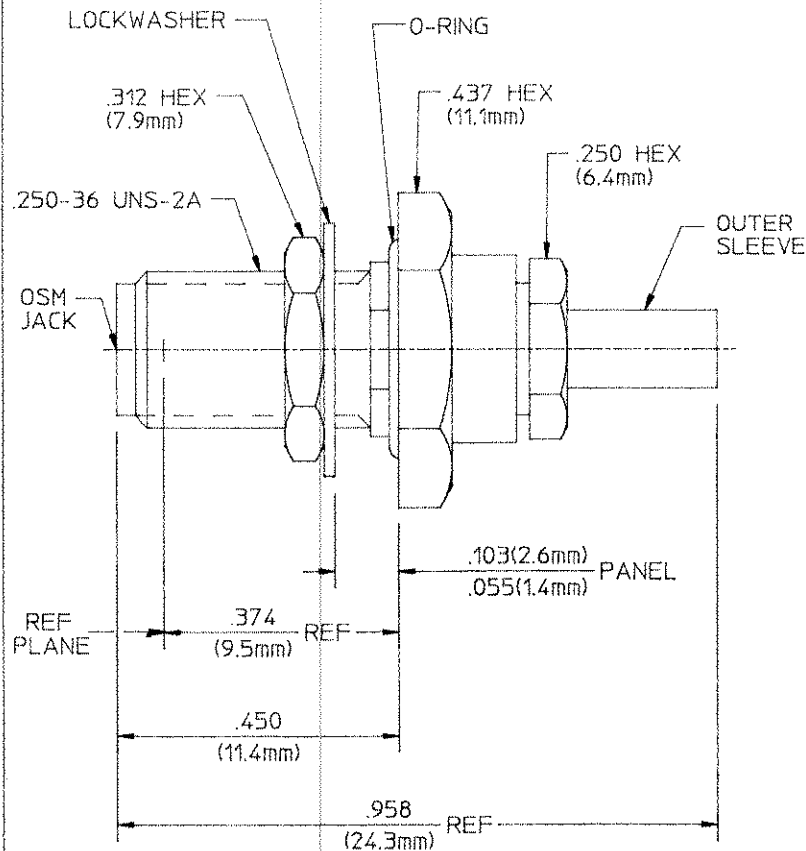

RECOMMENDED MOUNTING HOLE

HOUSING CLAMP NUT MOUNTING NUT LOCKWASHER	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	PASSIVATE PER ASTM A380
SLEEVE	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	GOLD PLATE PER MIL-G-45204 OVER NICKEL PLATE PER QQ-N-290
DIELECTRIC	TFE FLUOROCARBON PER MIL-P-19468 AND FED SPEC L-P-403	N/A
DIELECTRIC CENTER CONTACT	NYLON	N/A
FERRULE	BERYLLIUM COPPER PER QQ-C-530, ALLOY 173	GOLD PLATE PER MIL-G-45204 OVER COPPER PLATE PER MIL-C-14550
O-RING	SOFT COPPER ALLOY	GOLD PLATE PER MIL-G-45204
	SILICONE RUBBER PER ZZ-R-765	N/A
COMPONENT	MATERIAL	FINISH

CABLE ENTRY DIAMETER MINIMUM	
FERRULE	.099
SLEEVE	.036
DIELECTRIC	.021
CONTACT	.021

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCE ON
FRAC DEC ANGLES
±.1/64 ±.005 ±.1°

These drawings and specifications are the property of Omni Spectra Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of material without written permission.

DESIGNED BY	M.Y.	DATE	3-6-89
CHECKED BY	L.R.	DATE	3-7-89
APPROVED BY	<i>LPB</i>	DATE	3-7-89
USE ASSY PROCEDURE			
NO. AP. 20-538			

Omni Spectra, Inc.
Microwave Connector Division

TITLE
SMA BULKHEAD FEEDTHRU CABLE JACK
CRIMP ATTACH. M39012/59-3018 CAT.B

SIZE B	CODE IDENT NO. 26805	2034-8018-92	010
SCALE 5:1	SHEET 1 OF 1		

NOTES:

1. DESIGNED FOR USE WITH
RG-178/U CABLE
2. CAPTURED CENTER CONTACT

CUSTOMER

1051987
SHEET 1 OF 1
REV 0