

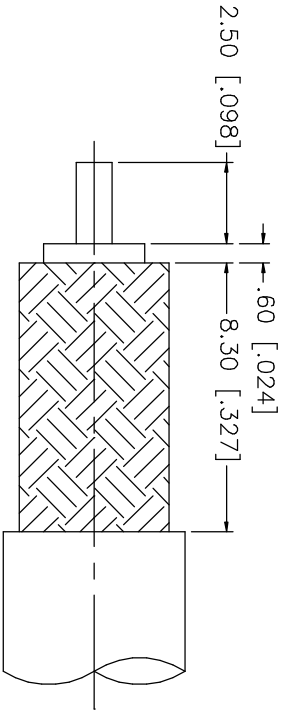
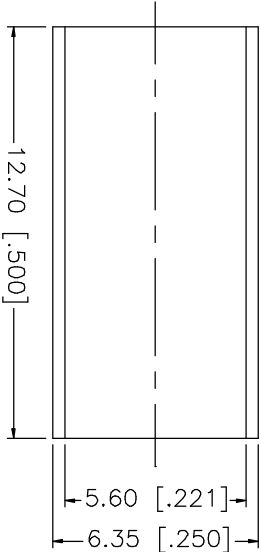


REV.	DATE	DESCRIPTION
NC	11/27/02	INITIAL RELEASE

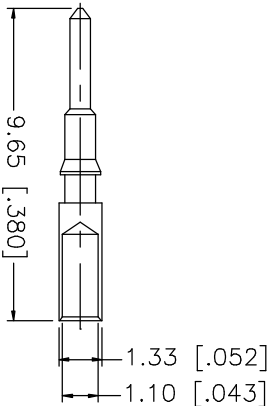

RECOMMENDED CABLE
STRIPPING DIMENSIONS

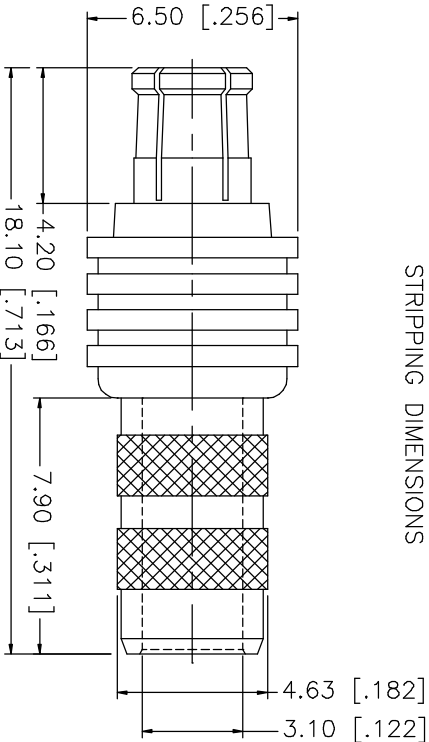

NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
SQ. CRIMP SIZE .043"

			UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY		APPROVALS		DATE										
8					DRAWN		G.R.S.		11/27/02								
7					CHECKED												
6					ISSUED												
5																	
4	FERRULE	COPPER	GOLD		TITLE MCX CRIMP PLUG (FOR RG-58A/U, 58C/U CABLE)												
3	CONTACT PIN	BRASS	GOLD														
2	INSULATOR	TEFLON	NATURAL														
1	BODY	BER. COPPER	GOLD														
DESCRIPTION			MATERIAL	FINISH	DO NOT SCALE DRAWING		Amphenol - Connex CONNECTOR CORPORATION										
			UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .XXX = ± 0.005" .XX = ± 0.010" .X = ± 0.020"					SIZE A FSCM NO. 99001 DWG. NO. 252180.DWG REV. NC									
			DO NOT SCALE DRAWING														
						SCALE		NA		PART NO.		252180		SHEET		1 OF 1	