Gigabit PoE Transformer

SMD Single Port Gigabit or Dual Port 10/100BASE-TX PoE and PoE+
















Product Features:

- Gigabit Ethernet PoE/PoE+ Transformer
- IEEE802.3ab/af/at Compliant
- UL/EN60950 Recognized
- 100% Electrical Testing
- 1500Vrms Hi-Pot
- Patented Open Frame Construction

D . N . I	<i>c</i> : :	Temp.			Return Loss (min)				Insertion
Part Number	Circuit	Package	Range	PoE	1-40MHz	60MHz	80MHz	100MHz	Loss (max)
TG111-S112NYRL	Α	NY	0 to 70°C	PoE	-18dB	-14dB	-12dB	-10dB	-1.1dB
TG111-E112NYRL	Α	NY	-40 to +85°C	PoE	-18dB	-14dB	-12dB	-10dB	-1.1dB
TG1G-S012NZRL	Α	NZ	0 to 70°C	PoE	-18dB	-14dB	-12dB	-10dB	-1.1dB
TG1G-E012NZRL	Α	NZ	-40 to +85°C	PoE	-18dB	-14dB	-12dB	-10dB	-1.1dB
TG111-HP3NZRL*	Α	NZ	0 to 70°C	PoE+	-18dB	-14dB	-12dB	-10dB	-1.1dB
TG111-HPE3NZRL*	А	NZ	-40 to +85°C	PoE+	-18dB	-14dB	-12dB	-10dB	-1.1dB

^{*} Pins 13 - 24 must be located on the line side for PoE+

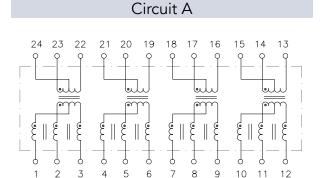


Notes:


- 1) Please contact the factory or representative for individual datasheets or additional information.
- 2) For the smallest single port Gigabit or dual port 10/100BASE-TX PoE/PoE+ transformer contact the factory about the proprietary *GEmini™ series*.
- 3) Contact factory for "LF" lead free availability.

HALO Gigabit Family of Ethernet Transformers

NZ Package

NY Package

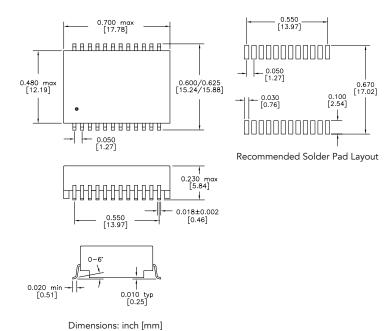

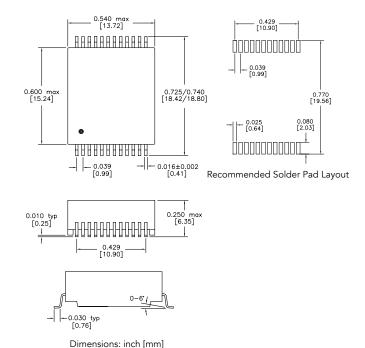



Co-Planarity: 0.004 [0.10]

6,297,720 B1 6,320,489 B1 6,344,785 B1 6,662.431 B1

6,297,721 B1

US Patent Numbers:

5,656,985

HALO® Electronics is a leading supplier of high quality communication magnetics including signal transformers, filters, CMR chokes, PoE power transformers, DC/DC converters, and integrated Ethernet connectors. HALO's leading edge technology solutions are manufactured in ISO9001 and ISO14001 factories offering high quality products at a competitive price.