



0910 ASL 425

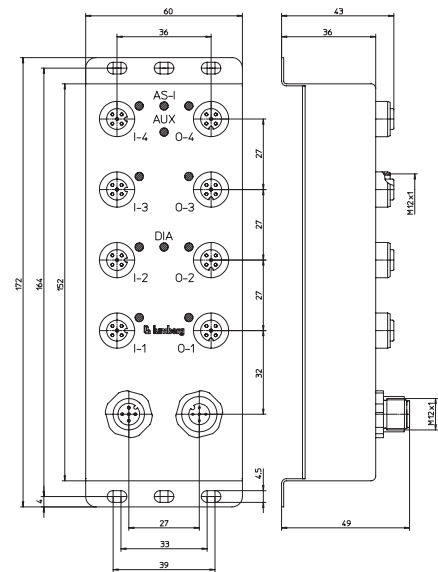


AS-Interface Module with 4-Digital Inputs and 4-Digital Outputs

4 IN / 4 OUT

AS-Interface module with housing and receptacle shells in stainless steel, 4 digital inputs to connect standard sensors and 4 digital outputs (2 A) to connect standard actuators, M12 bus connection.

– especially designed for food and beverage equipment –












Bit Assignment

Bit	-	-	-	-	3	2	1	0
M12 Input								
Byte 0	-	-	-	-	I-4	I-3	I-2	I-1
M12 Output								
Byte 0	-	-	-	-	O-4	O-3	O-2	O-1

Diagnostic Indication

LED	Indication	Condition
O-1..4 / O-4..4	yellow	channel status
AS-i	green	AS-Interface power supply active
AUX	green	actuator supply active
	red	communication error
DIA	red flashing	periphery error (actuator short circuit/sensor supply error)

Pin Assignments

Bus connection M12	Input 1 M12	Input 2 M12	Input 3 M12	Input 4 M12
 <p>1 = AS-Interface + 2 = 0 V AUX 3 = AS-Interface - 4 = +24 V AUX 5 = earth</p>	 <p>1 = +24 V 2 = IN 2 3 = GND (0 V) 4 = IN 1 5 = earth</p>	 <p>1 = +24 V 2 = n.c. 3 = GND (0 V) 4 = IN 2 5 = earth</p>	 <p>1 = +24 V 2 = n.c. 3 = GND (0 V) 4 = IN 3 5 = earth</p>	 <p>1 = +24 V 2 = n.c. 3 = GND (0 V) 4 = IN 4 5 = earth</p>
Output 1 M12	Output 2 M12	Output 3 M12	Output 4 M12	
 <p>1 = n.c. 2 = n.c. 3 = GND (0 V) 4 = OUT 1 5 = earth</p>	 <p>1 = n.c. 2 = n.c. 3 = GND (0 V) 4 = OUT 2 5 = earth</p>	 <p>1 = n.c. 2 = n.c. 3 = GND (0 V) 4 = OUT 3 5 = earth</p>	 <p>1 = n.c. 2 = n.c. 3 = GND (0 V) 4 = OUT 4 5 = earth</p>	

The connection to earth for the outputs is implemented via the earthing contacts at the fastening holes.



AS-Interface Module with 4-Digital Inputs and 4-Digital Outputs

0910 ASL 425

Technical Data

Environmental

Degree of protection	IP 69K
Operating temperature range	-25°C (-13°F) to +80°C (+176°F)
Weight	550 g
Housing material	stainless steel

Bus system

AS-Interface profile	AS-Interface Version 2.1
I/O configuration	S 7.A.E
ID code	7 hex
ID2 code (extended ID-code)	E hex
Support A/B addressing	F hex
	no

Electronics power supply

Rated voltage	AS-Interface
Voltage range	AS-Interface net
Power consumption	26.5–31.6 V DC
Reverse polarity protection	max. 250 mA
Indication	yes
	LED green

Input power supply

Voltage range (AS-Interface net)	17–30 V
Total current of all sensors	max. 200 mA
Short circuit-proof	yes

Inputs

Rated input voltage	Type 2 acc. to IEC 61131-2
Signal state "1"	24 V DC
Signal state "0"	Us > 10 V / Is > 4.7 mA
Input current at 24 V	Is < 1.5 mA
Input circuit	15 mA
Number of digital channels	p-switching
Channel status indicator	4
	LED yellow per channel

Output power supply

Rated voltage	AUX
Voltage range	24 V DC
Potential separation	10–30 V
Reverse polarity protection	present
Indication	yes/electronic
	LED green

Outputs

Rated output current	
Short circuit-proof	
Max. output current	
Overload-proof	
Number of digital channels	
Channel type N.O.	
Channel status indicator	

Type 2 A acc. to IEC 61131-2

2 A per channel	
yes	
4 A per module	
yes	
p-switching	
LED yellow per channel	

Diagnostic

Indication	LED red
------------	---------

Included in delivery / Accessories

Dust covers M12	4 pieces
-----------------	----------

Part Number

0910 ASL 425



The application of these products in harsh environments should always be checked before use.
Specifications subject to alteration.