

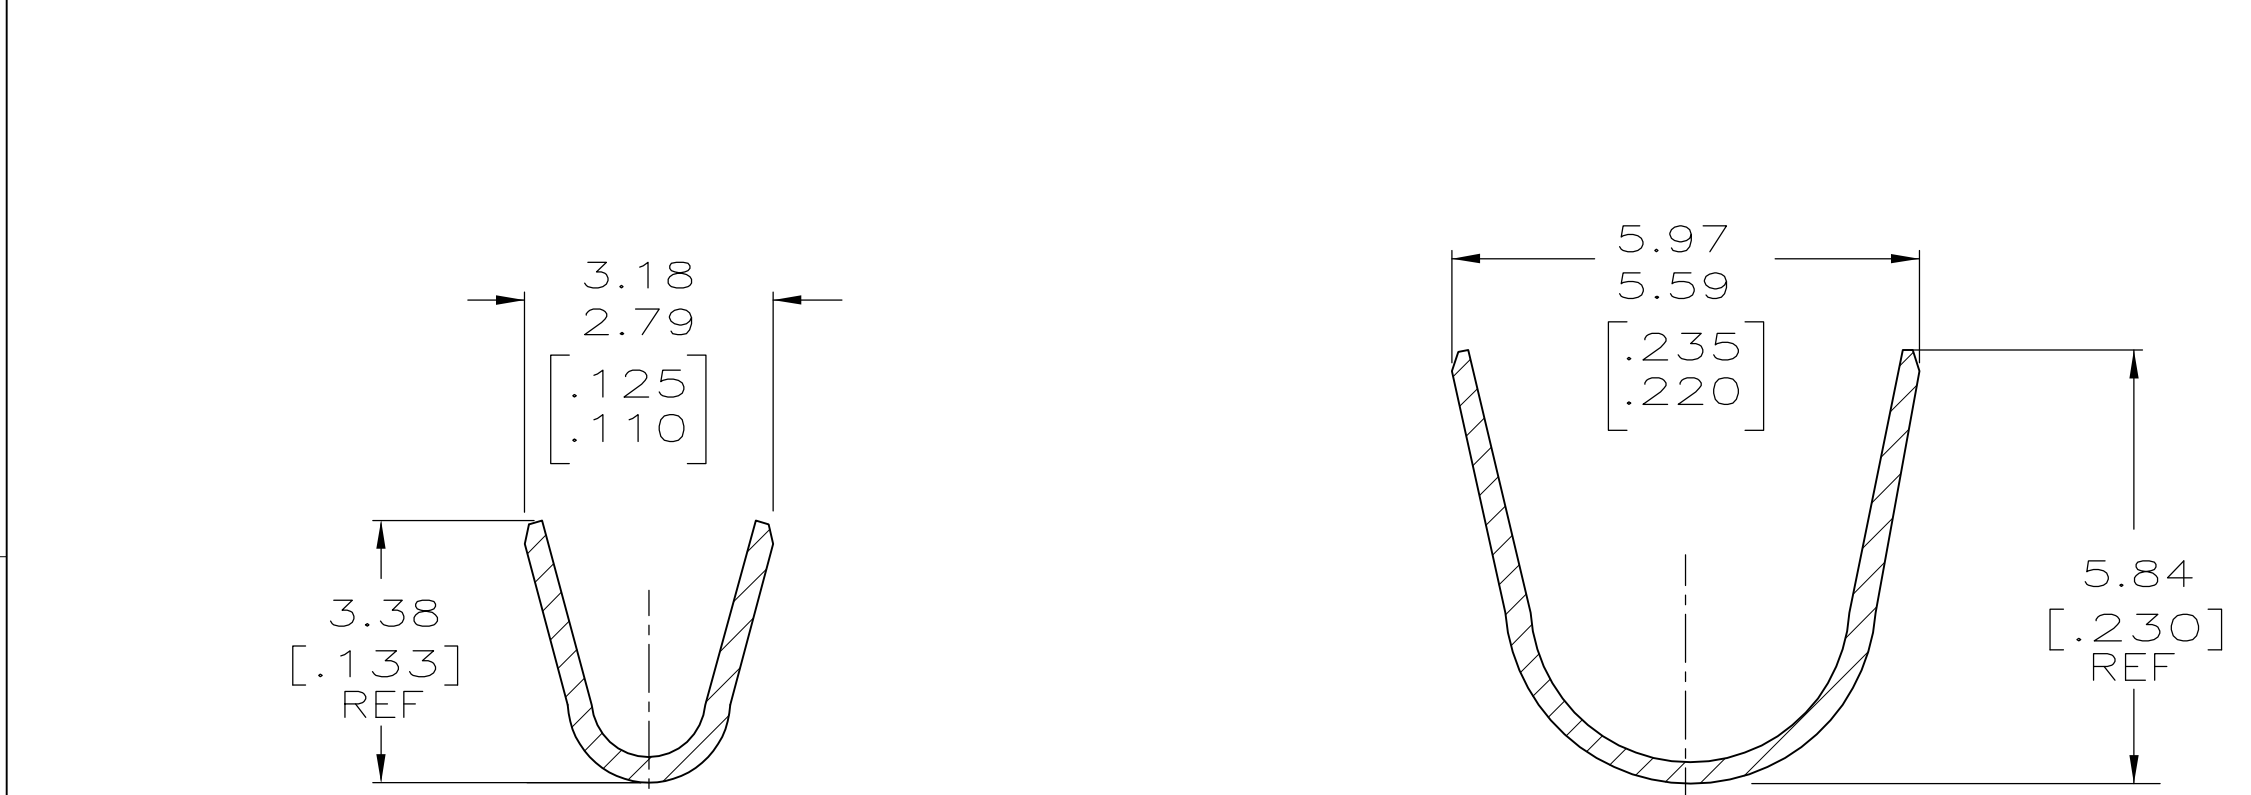
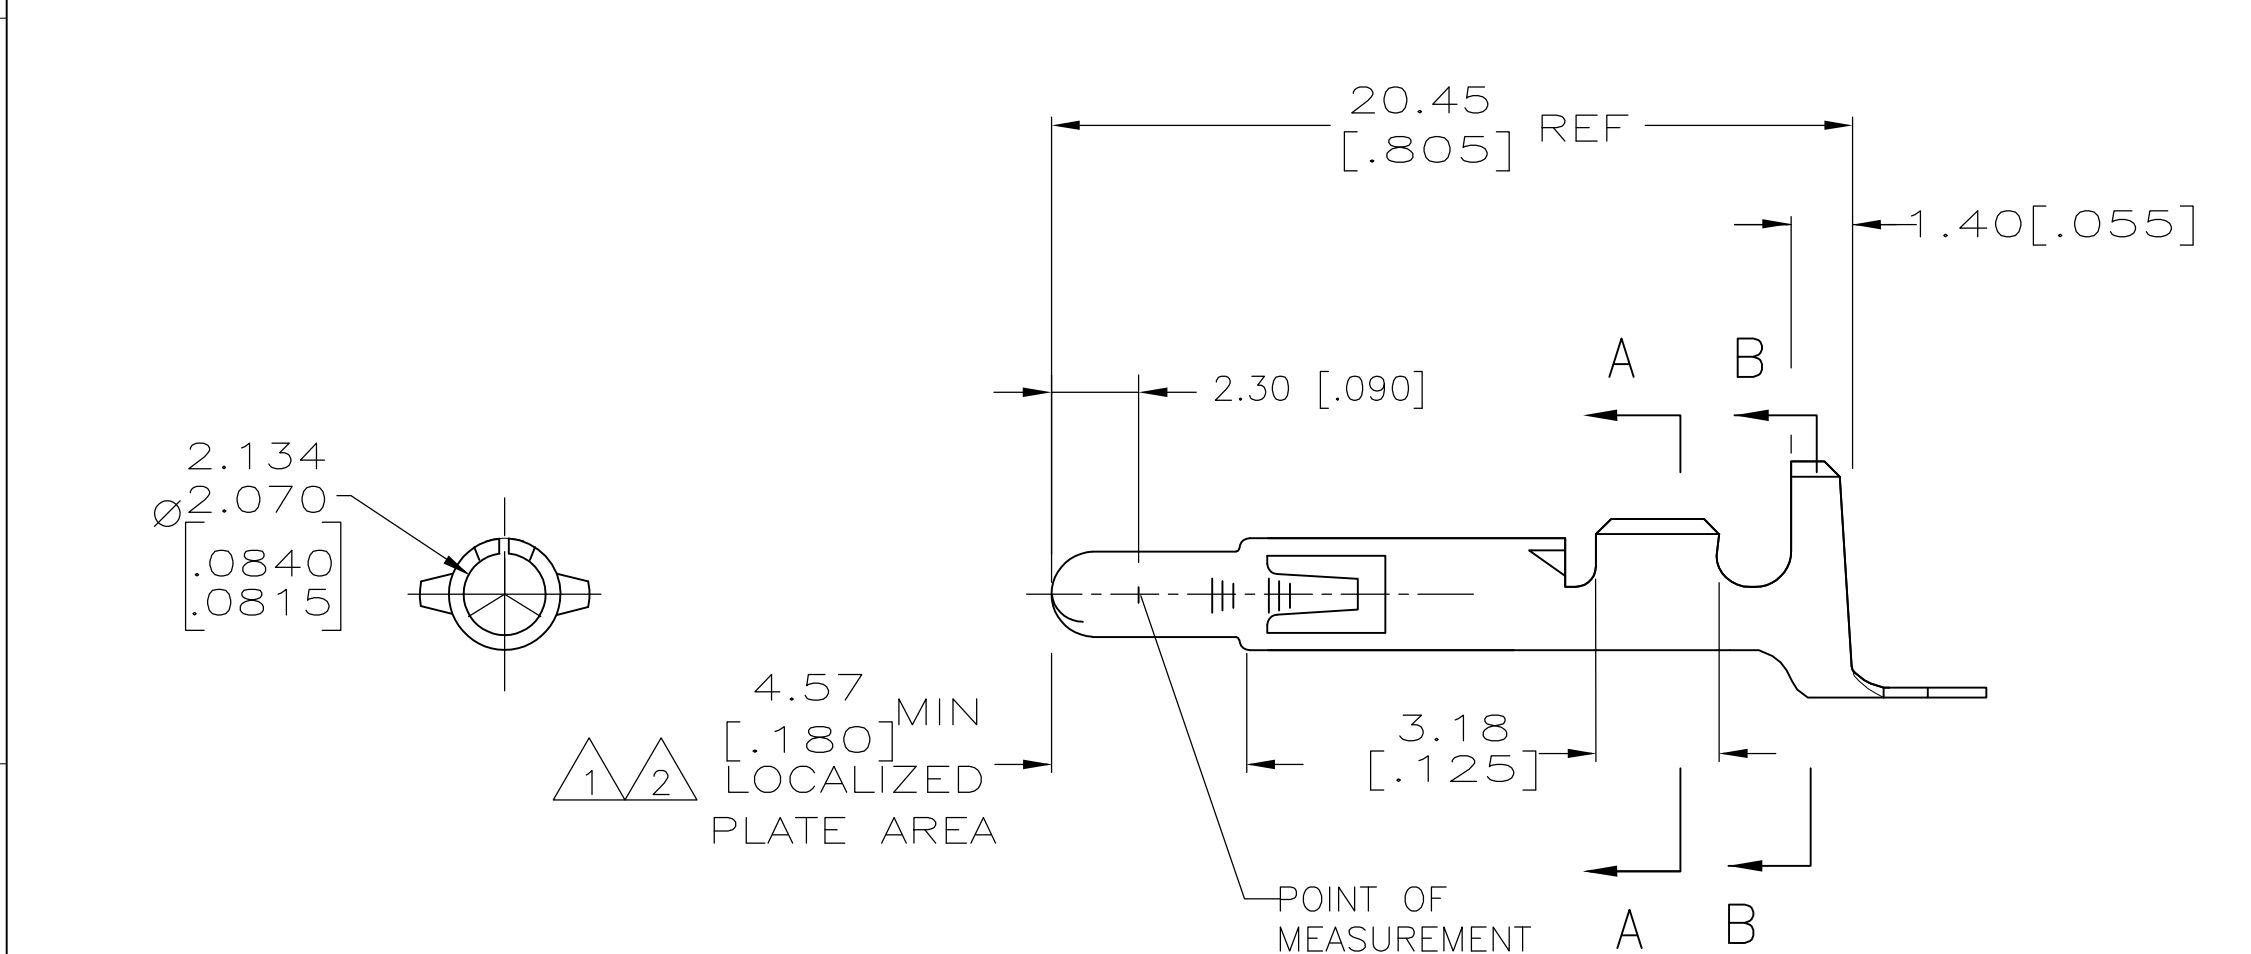


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
CM	00		T	REVISED PER ECR-12-013323	09AUG12	KH
			T1	REVISED PER ECR-14-001607	11FEB14	AV

APVD	TM
APVD	GK

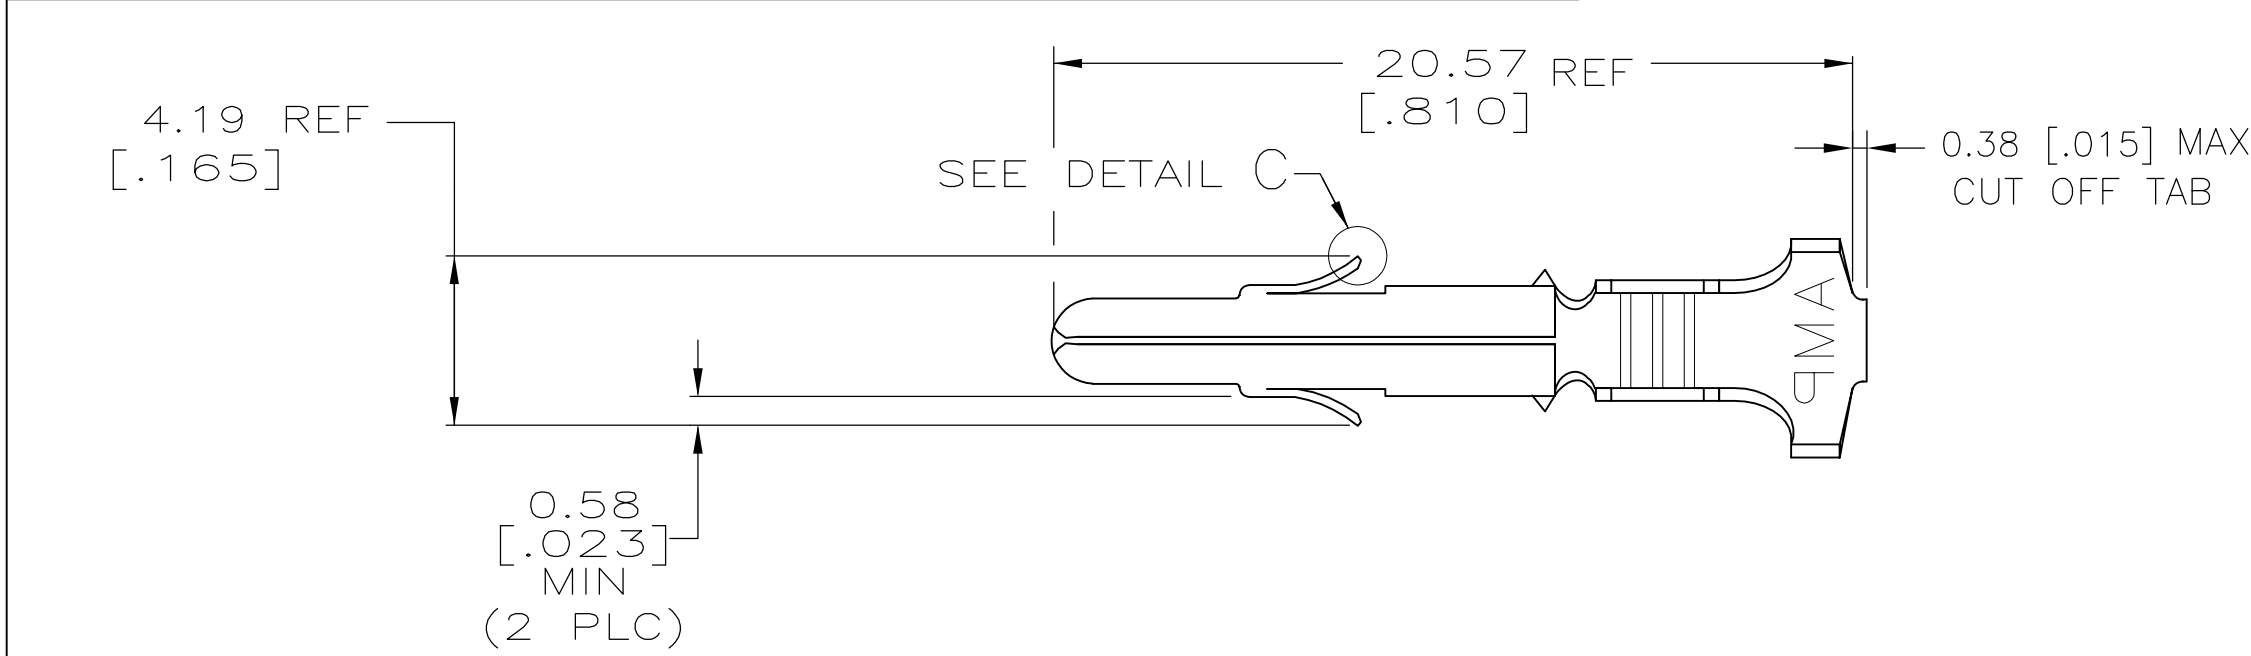

- 1
- PLATED WITH 0.00076[.000030] GOLD OVER 0.00127[.000050] MIN THK NICKEL UNDERPLATE.
- 2
- GOLD OVER NICKEL ON ENTIRE STAMPING; 0.00076[.000030] GOLD MINIMUM AT OINT OF MEASUREMENT IN CONTACT AREA, GOLD FLASH MINIMUM IN WIRE BARREL.
- 3
- DIMENSIONS IN BRACKETS ARE IN INCHES.
- 4
- WIRE RANGE: 20-14 AWG
INSULATION RANGE : 3.30-5.08 [.130-.200] DIA.

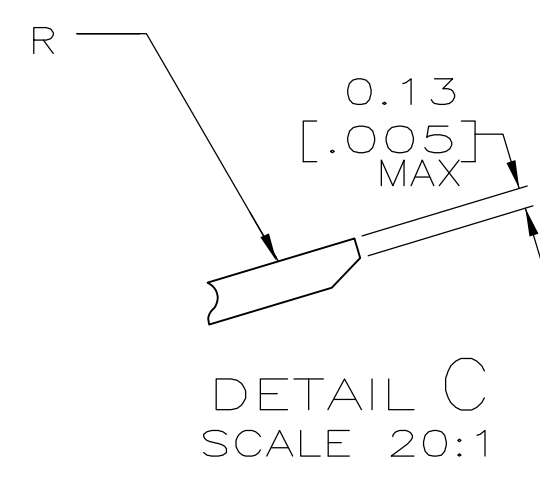

GOLD	2	0.30 [.012] BRASS	350552-7
GOLD	2	0.30 [.012] PH BZ	350552-6
TIN		0.30 [.012] PH BZ	350552-3
GOLD	1	0.30 [.012] BRASS	350552-2
TIN		0.30 [.012] BRASS	350552-1
FINISH		MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 12NOV2004	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK S. RIDGILL 12NOV2004		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. RIDGILL 12NOV2004	NAME PIN, (LOOSE PIECE), UNIVERSAL MATE-N-LOK™	
0 PLC ± -		PRODUCT SPEC		
1 PLC ± -		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
2 PLC ± 0.13 [.005]			A2 00779 C=350552	
3 PLC ± -			SCALE 5:1 SHEET 1 OF 1 REV T1	
4 PLC ± -				
ANGLES ± 0°30'				
FINISH		WEIGHT -		
MATERIAL -		CUSTOMER DRAWING		