


Mechanical Specifications	
D	18.0 ± 1.0 mm
T	6.50 mm Max
Lead Diameter	1.0 mm Nom
S	7.8 mm Nom
L	38.0 ± 5.0 mm
Straight Leads Coating run down	3.0 mm Max

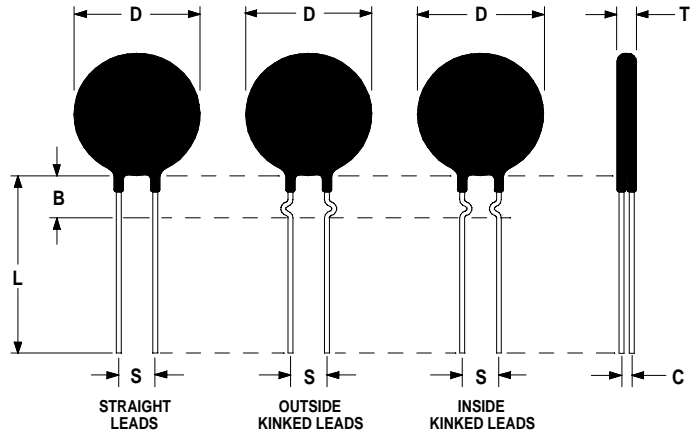

Electrical Specifications	
Resistance @ 25°C	30.0 Ω ± 25%
Max Steady State Current Up to 65°C	6.0 A
Max recommended energy rating	65 J
Resistance @ 100% of max Current	0.150 Ω
Maximum Capacitance @ 120/240 VAC	4500µF/ 1125µF
Resistance @ 50% of Max Current	0.310 Ω
Dissipation Constant	18 mW/°C
Thermal Time Constant	40 seconds

SL18 30006-H	
Date: 7/30/07	
Ametherm Inc. 3111 N. Deer Run Road, Suite 4 Carson City, NV 89701	