

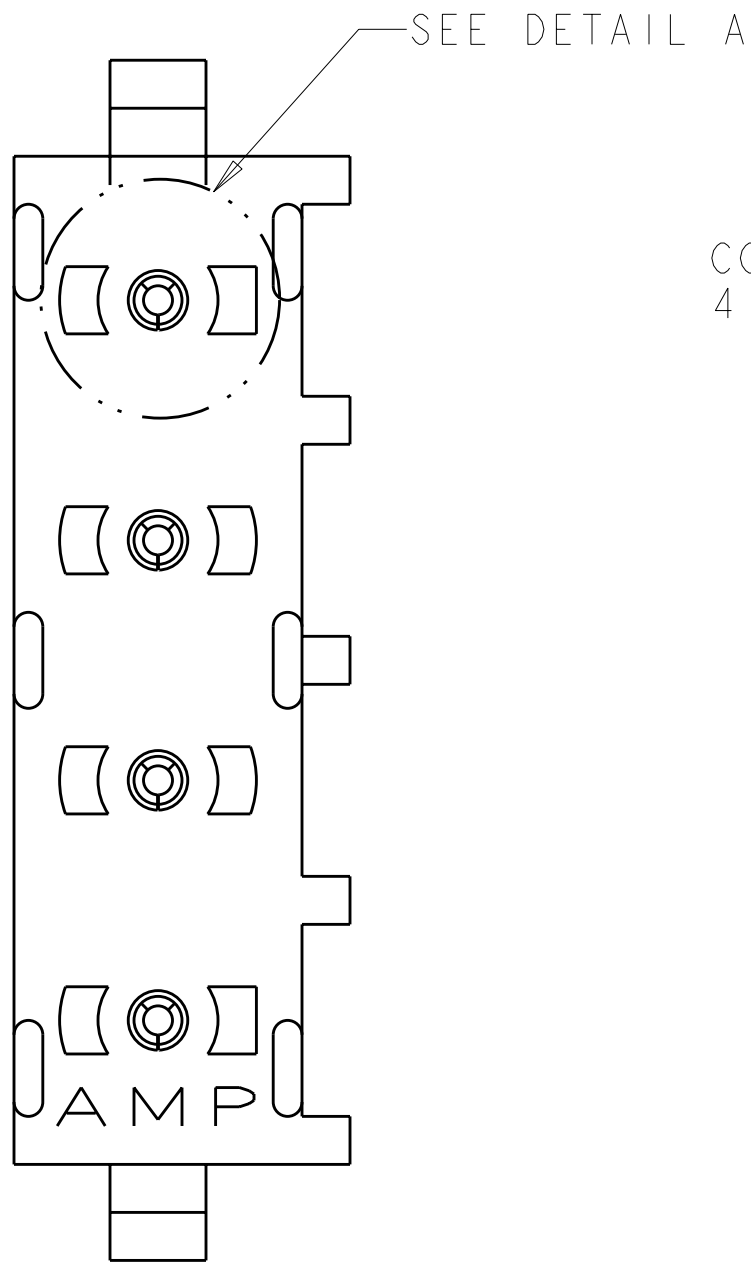





LOC		DIST		REVISIONS			
CM	00	P	LYR	DESCRIPTION	DATE	DWN	APVD
		B		REV PER ECR 10-018921	15SEP110	JR	TM

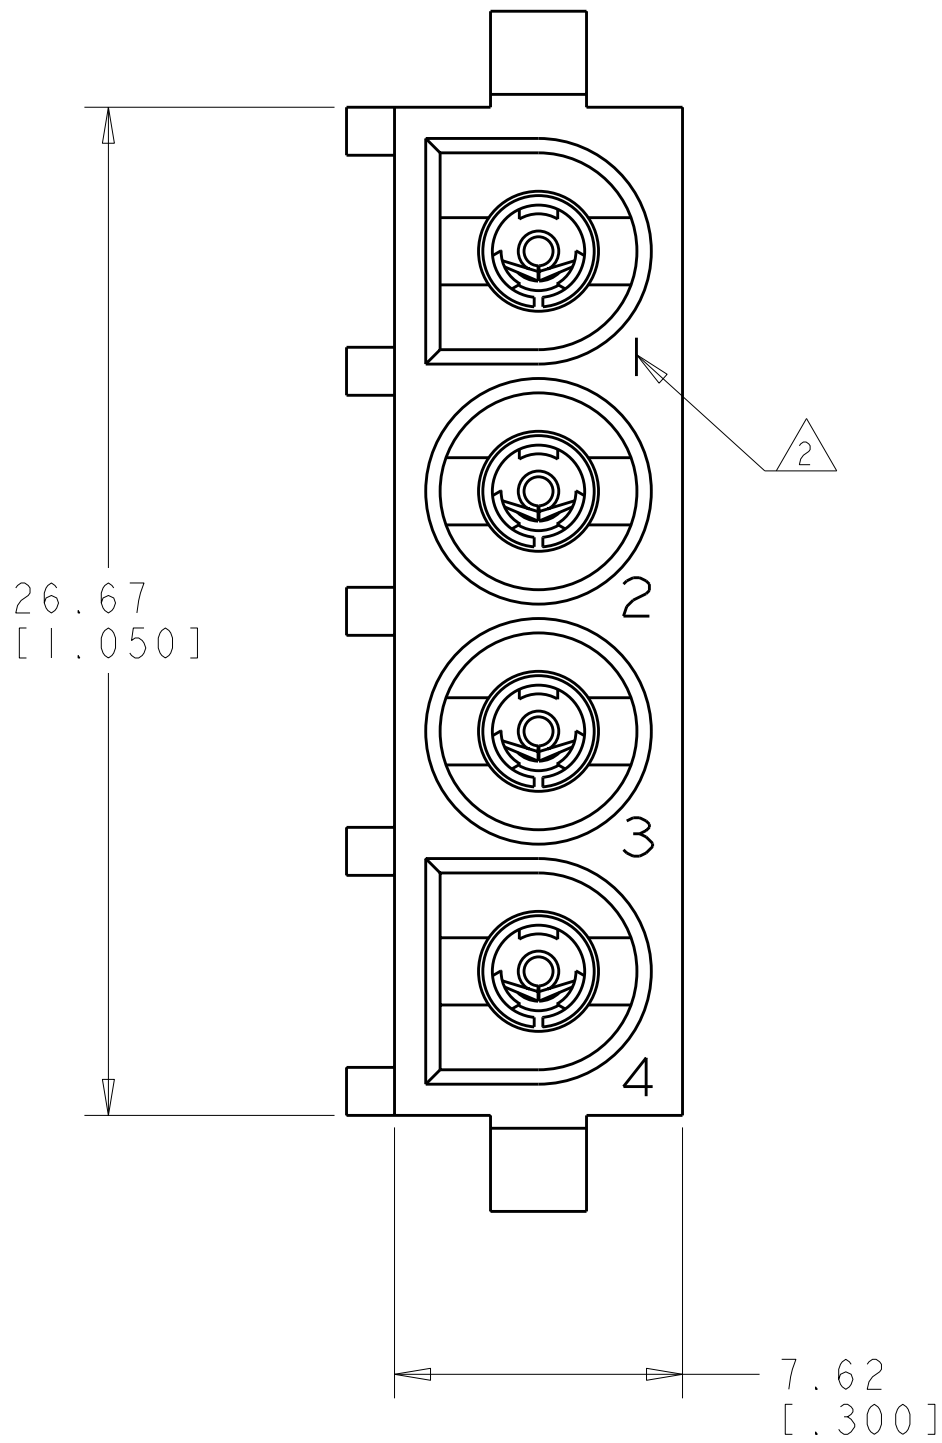


CONTACT
4 REQ'D

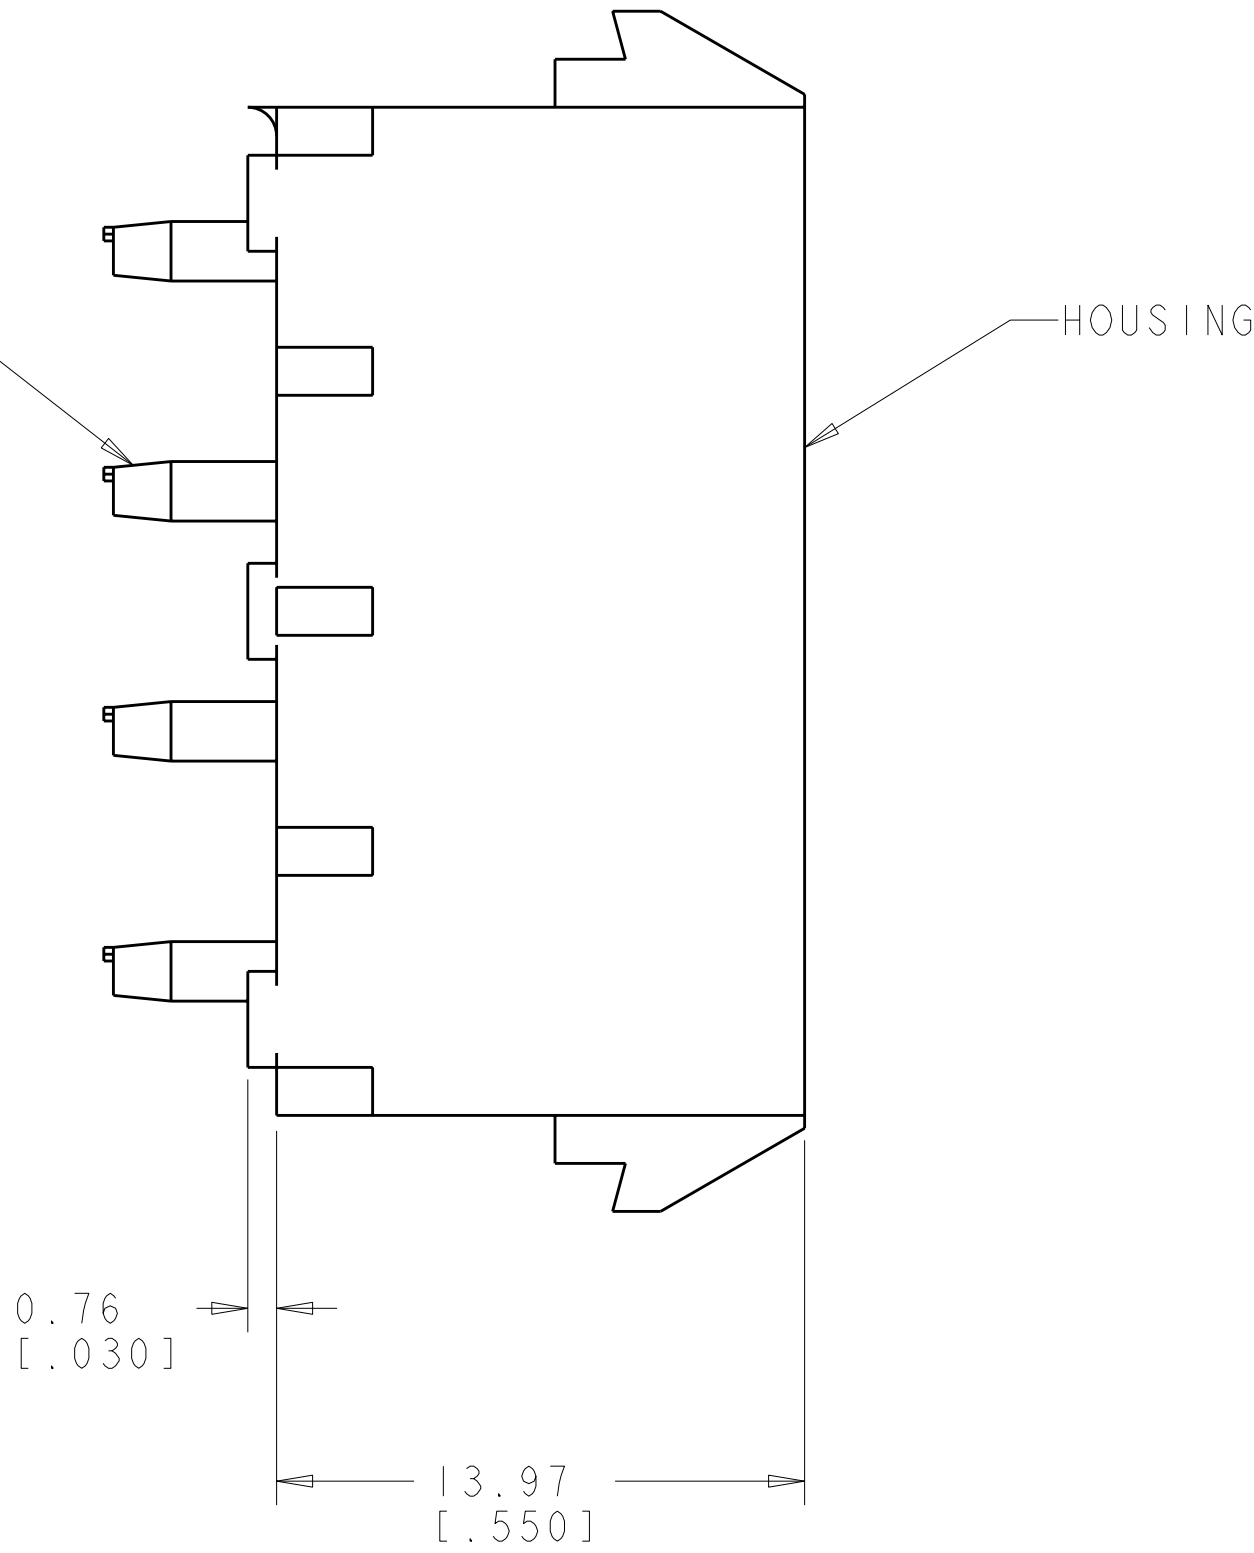

- PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-2.
- CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
- DIMENSIONS IN BRACKETS ARE IN INCHES.
- DRAIN HOLES LOCATED AS SHOWN. OPTIONAL CONSTRUCTION - ALL DRAIN HOLES LOCATED 90° AS SHOWN IN DETAIL A.
- FLAMMABILITY V-2 FOR THICKNESS 0.38mm, 0.75mm, 1.5mm AND 3.0mm PER IEC 60695-11-10.
- GLOW-WIRE FLAMMABILITY (GWFI) 800°C FOR THICKNESS 0.38mm AND 0.75mm PER IEC 60695-2-12.
- GLOW-WIRE FLAMMABILITY (GWFI) 960°C FOR THICKNESS 1.5mm AND 3.0mm PER IEC 60695-2-12.
- GLOW-WIRE IGNITION (GWIT) 825°C FOR THICKNESS 0.38mm, 0.75mm, 1.5mm, AND 3.0mm PER IEC 60695-2-13.

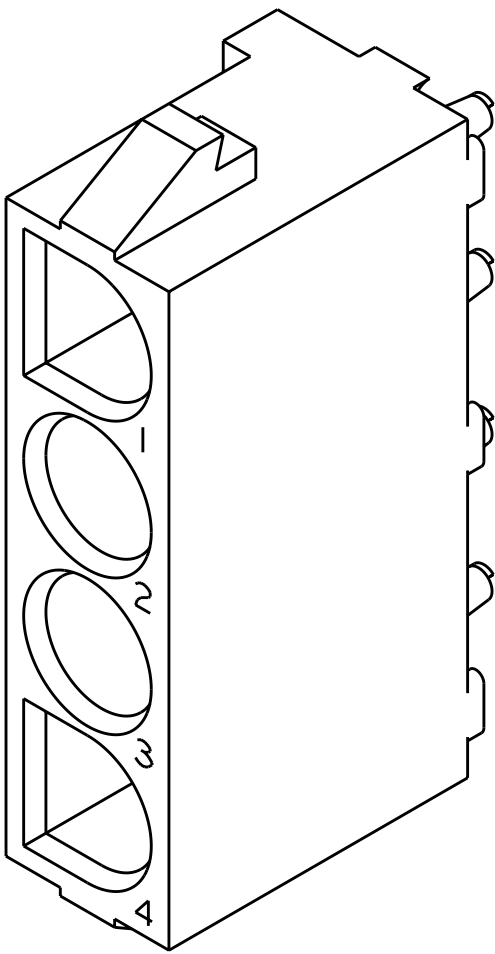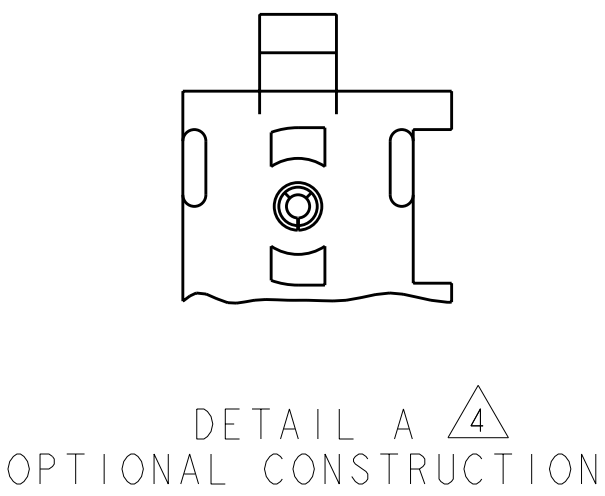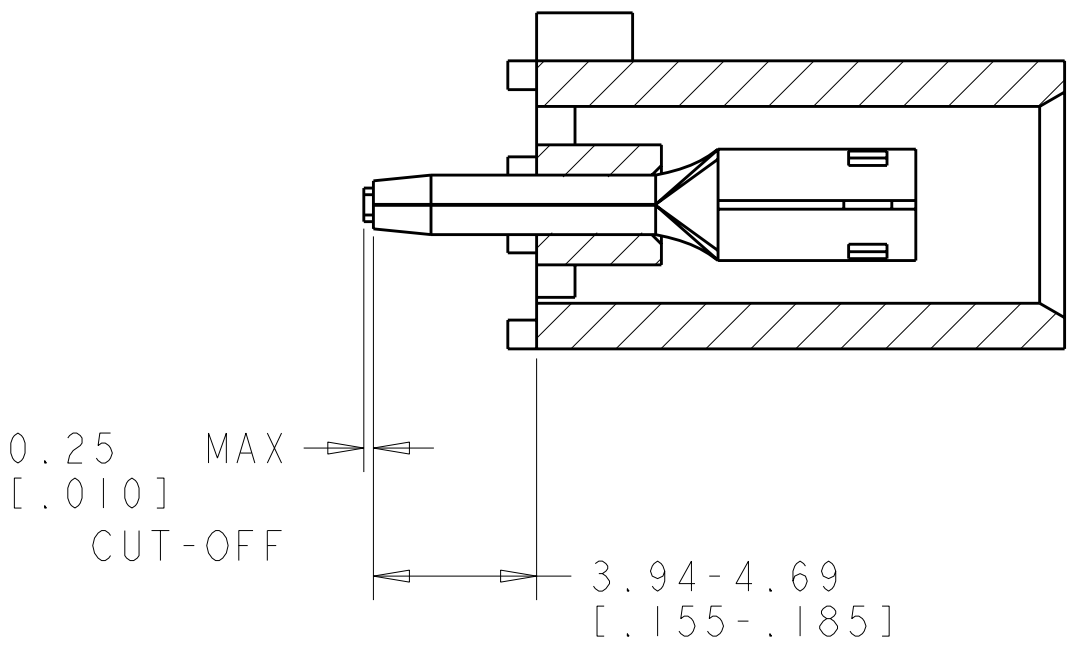

3 DIMENSIONAL MODEL
SCALE 4:1

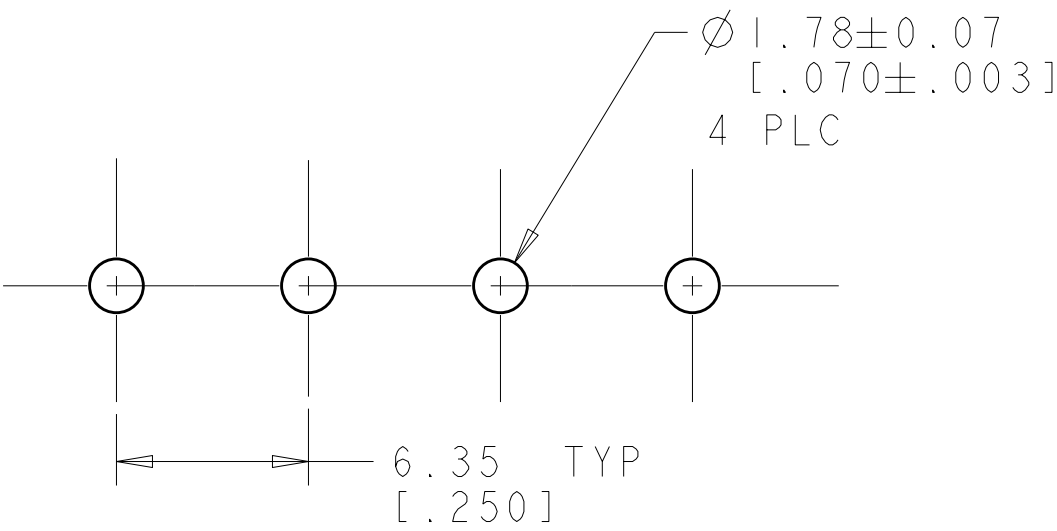

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 [.062] THICK P.C. BOARD

PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-2, NATURAL	1586872-1
PIN CONTACT MATERIAL AND FINISH	HOUSING MATERIAL AND COLOR	PART NUMBER



DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN R. WHITAKER 13MAR2008		Tyco Electronics Harrisburg, PA 17105-3608	
9 PLC ±		2 PLC ±		CHK D. COLEY 13MAR2008		NAME	
3 PLC ±		5 PLC ±		APVD D. COLEY 13MAR2008		PRODUCT SPEC	
4 PLC ±		ANGLES		APPLICATION SPEC		SIZE	
MATERIAL SEE TABLE		FINISH SEE TABLE		WEIGHT		CAGE CODE	
				CUSTOMER DRAWING		DRAWING NO	
						RESTRICTED TO	
						SCALE	
						SHEET	
						OF	
						REV	
						B	